



- PRESSURE RANGES 0-50mbar TO 0-1000mbar
- SUITABLE WITH AIR, NON-CORROSIVE GASES, AND LIQUIDS COMPATIBLE WITH SILICON
- 0-100mVdc, 0-5Vdc, 0-10Vdc OR 4-20mA OUTPUT OPTIONS
- ROBUST STAINLESS STEEL CONSTRUCTION
- HIGH PROOF PRESSURE RANGES
- WIDE OPERATING TEMPERATURE
- ZERO AND SPAN ADJUSTMENT
- CE MARKED

LP1000 series now extends the pressure sensor technology into very low-pressure applications, with operating ranges down to 0-50mbar and still maintaining high performance. The advanced sensor design provides very low hysteresis and excellent long-term stability normally not achievable when measuring very low pressure.

The LP1000 offers a low cost solution for accurate measurement of very low pressures and specifically designed for use in media such as air, non-corrosive gases and various liquids compatible with silicon. The stainless steel housing, fluorosilicone seals and silicon sensing element enables the product to maintain accurate performance and provide extremely good durability

Available in pressure ranges from 0-50mbar to 0-1000mbar and with electrical outputs of 0-100mVdc, 0-5Vdc, 0-10Vdc and 4-20mA.

Applications include laboratory and test, air and gas pressure monitoring, leak detection, low pressure liquid and hydrostatic pressure measurements.

Tel: +44 (0) 1978 262255



Fax: +44 (0) 1978 262233

ellison sensors international

Sensor House, Wrexham Technology Park, Wrexham, LL13 7YP, Wales, UK
sales@esi-tec.com www.esi-tec.com

SPECIFICATION

PRESSURE RANGES:

0 to 1000mbar see table below for list of all standard pressure ranges.

OVERPRESSURE:

Pressure can exceed rated range by the multiple shown below with no damage or change in calibration above $\pm 0.5\%$ FS.

4x for ranges 0bar to 500mbar

3x for ranges 0bar to 1000mbar

OUTPUT SIGNAL:

0-10mV/V [nominal] (4 wire non-amplified)

Zero offset: ± 1 mV/V,

Span tolerance: $\pm 30\%$ FSO

0-5 Vdc, 0-10 Vdc (4 wire amplified)

Zero Offset and Span Setting

$\pm 0.5\%$ FSO

4-20mA (2 wire amplified)

Zero Offset and Span Setting

± 0.08 mA

ZERO AND SPAN SETTING:

$\pm 5\%$ FS adjustment with easy access trimming

Potentiometers on amplified version only

SUPPLY VOLTAGE:

Measured across supply terminals on connector plug

5-15Vdc for 0-10mV/Vdc version

13-30Vdc for 0-5Vdc and 0-10Vdc versions

13-36Vdc for 4-20mA version


REVERSAL OF SUPPLY VOLTAGE:

Protected against supply voltage reversal up to 50Vdc

LOAD DRIVING CAPABILITY

(4-20mA version only):

Calculate maximum load see chart below.

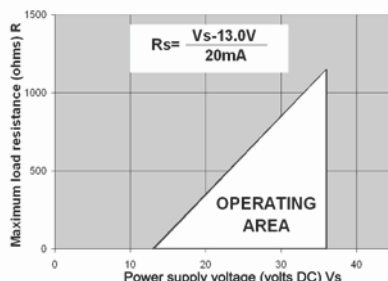

E.g. with supply voltage load of 36vdc, maximum load is 1150ohms.

COMBINED NON-LINEARITY AND HYSTERESIS:

$\pm 0.50\%$ FS best fit straight line definition.

REPEATABILITY:

$\pm 0.20\%$ FS defined as maximum error between three consecutive pressure cycles.

LONG TERM STABILITY:

$\pm 0.5\%$ FS/year non-cumulative

PRESSURE MEDIA:

All fluids compatible with 303 and 316 stainless steel, fluorosilicone, silicon.

OPERATING TEMPERATURE RANGE:

Ambient: -20°C to $+85^\circ\text{C}$

Storage: 5°C to $+40^\circ\text{C}$

TEMPERATURE EFFECTS:

$\pm 2.5\%$ FS total error band for -20°C to

70°C Typical thermal zero and span

coefficients $\pm 0.04\%$ FS/ $^\circ\text{C}$

INSULATION RESISTANCE:

100Mohm @50Vdc all electrical connection to case

ELECTROMAGNETIC-COMPATIBILITY:

Emissions EN61000-6-4

Immunity EN61000-6-2

Certification CE marked

PRESSURE CONNECTION:

1/4" BSP (others on request)


ELECTRICAL CONNECTION:

Mating socket with screw terminal connections to DIN 43650, rated IP65.

WEIGHT:

195 grams excluding mating connector.

DIMENSIONS (in mm)

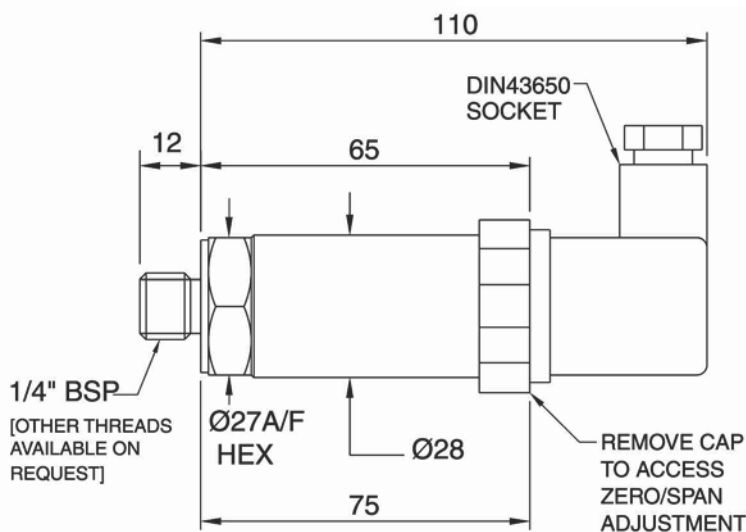

ELECTRICAL CONNECTION

Pin No.	2 wire	4 wire
1	+supply	+supply
2	4-20mA signal	-supply
3	not fitted	+output
⊥	to case	-output

ORDER DETAILS

State model number and pressure range required:-
e.g. LP1000 0-1000mbar

Model No.	OUTPUT
LP1000	0-10mV/Vdc
LP1001	0-5Vdc
LP1002	0-10Vdc
LP1003	4-20mA

PRESSURE RANGES

0 - 50mbar
0 - 100mbar
0 - 250mbar
0 - 500mbar
0 - 1000mbar

CALIBRATION

All products manufactured by Ellison Sensors are calibrated using precision calibration equipment with traceability to international standards.

Ellison Sensors operates a policy of continuous product development. We reserve the right to change specification without prior notice.

Tel: +44 (0) 1978 262255



Fax: +44 (0) 1978 262233

ellison sensors international

Sensor House, Wrexham Technology Park, Wrexham, LL13 7YP, Wales, UK
sales@esi-tec.com www.esi-tec.com