

Object Detection

Mechanical and Inductive Single and Multiple Position Switches



more added value





Balluff is a worldwide leading company in the field of position detection.

Our products range includes electronic sensors, transducers based on various operating principles, identification systems, bus-compatible sensors as well as mechanical and inductive single and multiple position switches. Balluff products are found wherever accuracy and reliability are in demand.


Wherever there is a need to automate, sense objects, or report linear and rotary motion to controllers – Balluff is always the right partner.

Our QM system meets the requirements of DIN EN ISO 9001:2000. Eleven Balluff companies have a certified QM system, two a certified environmental protection system.

By mastering process-capable production and assembly techniques and statistical process control we achieve consistently high product quality. Intensive testing before serial production begins guarantees reliable function.

With more than 50 years of experience in the field of sensor technology, Balluff today is one of the most capable manufacturers of both standardized and custom limit switches. Innovative technology and application-specific customer solutions are the outstanding features of the entire product range.

Highly-qualified development engineers and experienced designers work closely with the manufactures to ensure mature series products that are used successfully in every area of automation – even under extreme and aggressive operating conditions.

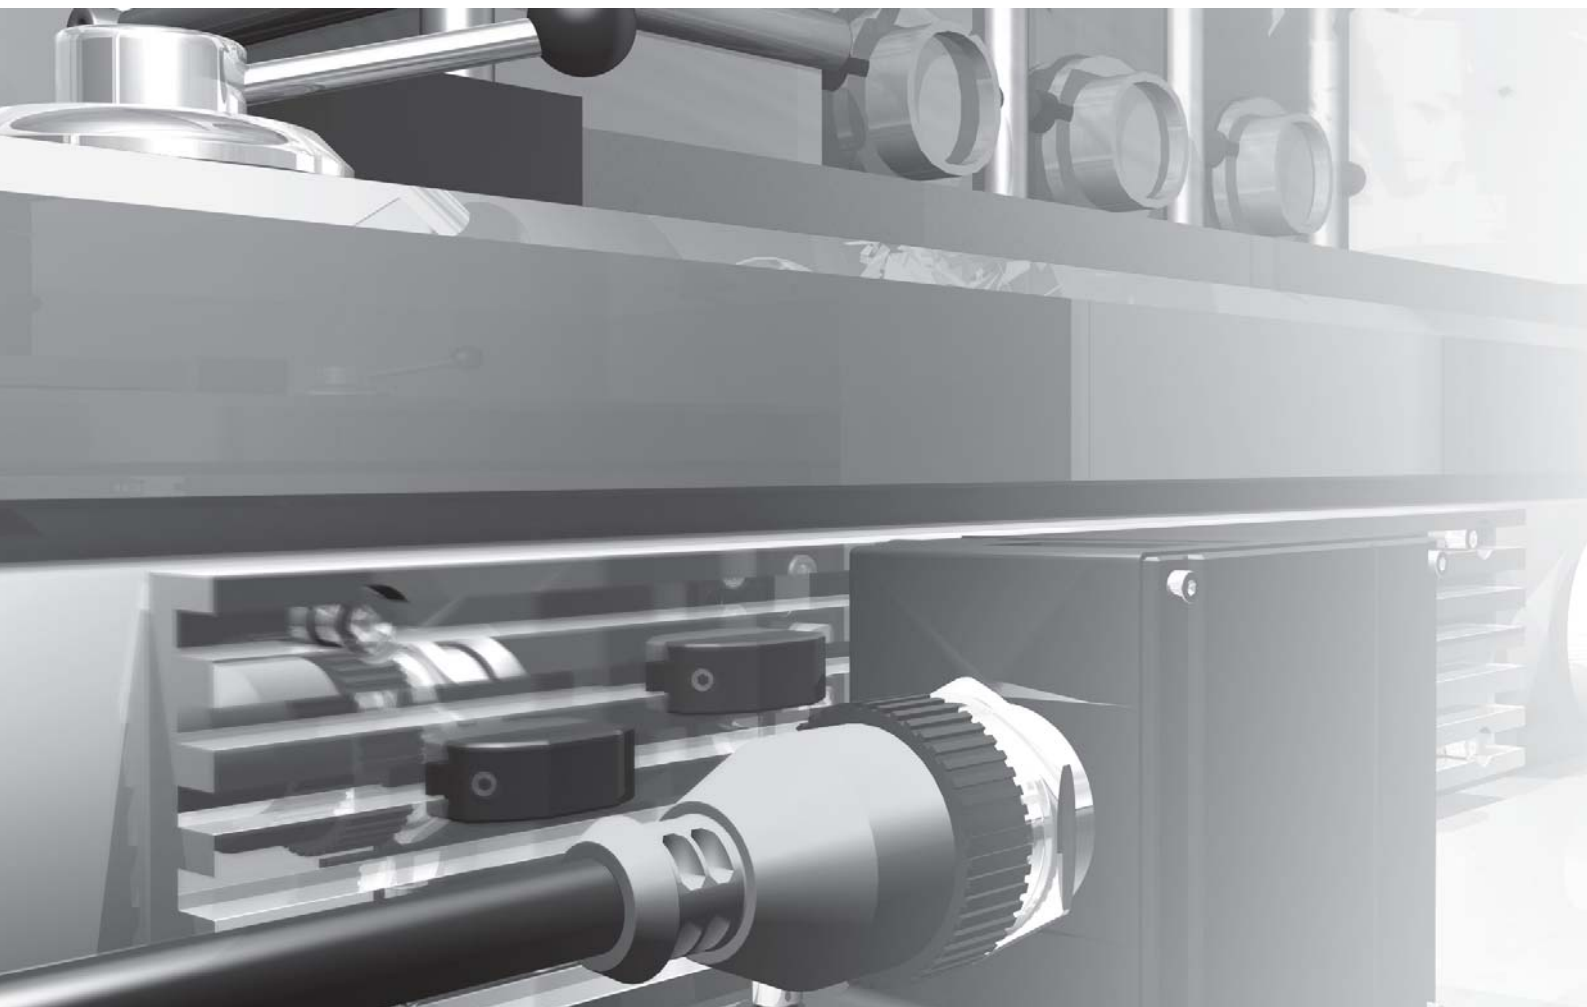

Object Detection



General Information	i
Principles of Mechanical and Inductive Single and Multiple Position Switches	
Mechanical Single and Multiple Position Switches	1.1
Mechanical Single and Multiple Position Switches with Safety Switch Positions	1.2
Mechanical Single and Multiple Position Switches with Forced Opening	1.3
Mechanical Multiple Position Switches with Quick-Change Plunger Unit	1.4
Inductive Single and Multiple Position Switches	2.1
Inductive Multiple Position Switches with Extended Switching Distance 4 mm	2.2
Special Form Factors	3
Wireless System	4
Mechanical and Inductive Switch Elements	5.1
Cam Trays and Cams	5.2
Connectors and Function Indicators	5.3

Argentina

Nortécnica S.R.L.
103 – Heredia 638
B1672BKD
Villa Lynch – San Martín
Pcia. de Buenos Aires
Phone +54 11 47573129
Fax +54 11 47571088
info@nortecnica.com.ar

Australia

Balluff-Leuze Pty. Ltd.
12 Burton Court
Bayswater VIC 3153
Phone +61 397 204100
Fax +61 397 382677
sales@balluff.com.au

Austria

Balluff GmbH
Industriestraße B16
2345 Brunn am Gebirge
Phone +43 2236 32521-0
Fax +43 2236 32521-46
sensor@balluff.at

Belarus

Balluffzentrum OOO.
Prospekt Nezavisimosti 185
Anlage 19, Office 1
220125 Minsk
Phone +375 17 2181713
Fax +375 17 2181798
balluff@nsys.by

Belgium

Balluff bvba
Interleuvenlaan 62, Zone 2
3001 Leuven
Phone +32 16 397800
Fax +32 16 397809
info.be@balluff.be

Brazil

Balluff Controles
Elétricos Ltda.
Rua Francisco Foga, 25
Distrito Industrial
CEP 13280.000
Vinhedo – São Paulo
Phone +55 19 38769999
Fax +55 19 38769990
balluff@balluff.com.br

Bulgaria

BPS AG
41, Nedelcho Bonchev St.
1528 Sofia
Phone +359 2 9609875
Fax +359 2 9609896
rayko.belopitov@bps.bg

Canada

Balluff Canada Inc.
2840 Argentia Road, Unit 2
Mississauga, Ontario
L5N 8G4
Phone +1 905 816-1494
Toll-free 1-8 00-927-9654
Fax +1 905 816-1411
balluff.canada@balluff.ca

Chile

Balluff Controles
Elétricos Ltda.
Brazil

China

Balluff (Shanghai) Trading
Co. Ltd.
Room 337, Xinxing Building
2005 Yanggao Rd. North
200131 Shanghai
Phone +86 21 51698788
Fax +86 21 22818067
info@balluff.com.cn

Columbia

Balluff Controles
Elétricos Ltda.
Brazil

Croatia

HSTEC d.d.
Zagrebacka 100
23000 Zadar
Phone +385 23 205-405
Fax +385 23 205-406
info@hstec.hr

Czech Republic

Balluff CZ, s.r.o.
Pelušková 1400
198 00 Praha 9 – Kyje
Phone +420 281 940099
Fax +420 281 940066
cz@balluff.cz

Denmark

Balluff ApS
Åbogade 15
8200 Århus N
Phone +45 70 234929
Fax +45 70 234930
info.dk@balluff.dk

Finland

Murrelektronik Oy
Koukkukatu 1
15700 Lahti
Phone +358 3 8824000
Fax +358 3 8824040
myynti@murrelektronik.fi

France

Balluff SAS
ZI Nord de Torcy-Bat 3
Rue des Tanneurs – BP 48
77201 Marne La Vallée
Cedex 1
Phone +33 1 64111990
Fax +33 1 64111991
info@balluff.fr

Great Britain

Balluff Ltd.
4 Oakwater Avenue
Cheadle Royal Business Park
Cheadle, Cheshire SK8 3SR
Phone +44 161 282-4700
Fax +44 161 282-4701
sales@balluff.co.uk

Greece

PILI S.A.
Ar. Kirioteanaxiou 1196
N. Magnisia
Post Box 99
57008 Thessaloniki
Phone +30 2310 784062
Fax +30 2310 784889
info@getil.gr

Hong Kong

Sensortech Company
No. 43, 18th Street
Hong Lok Yuen,
Tai Po, NT
Phone +852 26510188
Fax +852 26510388
sensortech@netvigator.com

Hungary

Balluff Elektronika Kft.
Pápai út. 55.
8200 Veszprém
Phone +36 88 421808
Fax +36 88 423439
saleshu@balluff.hu

Balluff Elektronika Kft.
Vihar utca 22.
1221 Budapest
Phone +36 1 4820002
Fax +36 88 442622
saleshu@balluff.hu

India

Balluff India
405 Raikar Chambers
Deonar Village Road,
Govandi, Mumbai 400088
Phone +91 22 67551646
Fax +91 22 67973257
balluff@balluff.co.in

Indonesia

PT. Multiguna Cemerlang
Bumi Serpong Damai
Sektor XI
Multipurpose Industrial
Building
Block H 3-31
Serpong Tangerang
15314 Jawa Barat
Phone +62 21 75875555
Fax +62 21 75875678
info@multiguanacemerlang.com

Iran

Iran Technical Supply Co.
Apt. #14, 3rd Floor, No. 141
North Sohrevardi Ave.
Teheran 15589
Phone +98 21 8763731
Fax +98 21 8769536
info@itsco-ir.com

Israel

Ancitech Ltd.
21 Haorgim St. 21b
Industrial Zone
Holon 58857
Phone +972 3 5568351
Fax +972 3 5569278
moshe@ancitech.com

Italy

Balluff Automation S.R.L.
Via Morandi 4
10095 Grugliasco, Torino
Phone +39 11 3150711
Fax +39 11 3170140
info.italy@balluff.it

Japan

Balluff Co., Ltd.
Ishikawa Bldg. 2nd Fl.
1-5-5 Yanagibashi, Taito-Ku
Tokyo 111-0052
Phone +81 03 5833-5440
Fax +81 03 5833-5441
info.jp@balluff.jp

**Korea**

Mahani Electric Co. Ltd.
792-7 Yeoksam-Dong
Kangnam-Gu, Seoul
Post code: 135-080
Phone +82 2 21943300
Fax +82 2 21943397
yskim@balluff.co.kr

Lithuania

interautomatika UAB
Kėstuėio 47
08127 Vilnius
Phone +370 5 2607810
Fax +370 5 2411464
andrius@interautomatika.lt

Malaysia

Sumber Engineering (M)
Sdn. Bhd. 20T 558
Jalan Subang 6
077 Persiaran Subang,
Sungai Penaga Industrial Parc
47500 Subang Jaya,
Selangor
Phone +60 3 56334227
Fax +60 3 56334239
alvin@balluff.com.sg

Mexico

Balluff de México S.A. de C.V.
Prol. Av. Luis M. Vega #109
Col. Ampliación Cimatario
C.P. 76030
Querétaro, Qro.
Phone +52 442 2124882
Fax +52 442 2140536
balluff.mexico@balluff.com

Netherlands

Balluff B.V.
Kempenslandstraat 11H
5262 GK Vught
Phone +31 73 6579702
Fax +31 73 6579786
info.nl@balluff.nl

New Zealand

Balluff-Leuze Pty. Ltd.
Australian

Norway

Primatec as
Lillesandsveien 44
4877 Grimstad
Phone +47 37 258700
Fax +47 37 258710
post@primatec.no

Philippines

Technorand Sales
Corporation
803 Wilshire Annapolis
Plaza,
No. 11 Annapolis Street,
San Juan,
Metro Manila 1500
Phone +63 2 7245006
Fax +63 2 7245010
techno@compass.ph

**Headquarters****Germany**

Balluff GmbH
Schurwaldstrasse 9
73765 Neuhausen a.d.F.
Phone +49 7158 173-0
Fax +49 7158 5010
balluff@balluff.de
www.balluff.com

**Poland**

Balluff Sp. z o.o.
Ul. Muchoborska 16
54-424 Wrocław
Phone +48 71 3384929
Fax +48 71 3384930
balluff@balluff.pl

Portugal

LA2P Lda.
Rua Teófilo Braga, 156 A
Escrit. F – Edifício S.
Domingos
Cabeco Do Mouro 2785-
122 S. Domingos De Rana
Phone +351 21 4447070
Fax +351 21 4447075
la2p@la2p.pt

Romania

East Electric s.r.l.
256 Basarabia Blvd.
030352 Bucuresti
Phone +40 31 4016301
Fax +40 31 4016302
office@eastelectric.ro

Russia

Balluff OOO
M. Kaluzhskaja Str. 15
Building 17, Office 500
119071 Moscow
Phone +7 495 78071-94
Fax +7 495 78071-97
balluff@balluff.ru

Serbia

ENEL d.o.o.
Vasilja Pavlovića 10
1400 Valjevo
Phone +381 14 291161
Fax +381 14 244641
enelva@ptt.yu

Singapore

Balluff Asia Pte. Ltd.
BLK 1004 Toa Payoh
Ind. Park
Lorong 8, #03-1489
Singapore 319076
Phone +65 62524384
Fax +65 62529060
balluff@balluff.com.sg

Slovak Republic

Balluff Slovakia s.r.o.
Jána Bottu 4
97401 Banská Bystrica
Phone +421 48 4148386/87
Fax +421 48 4148369
sekretariat@balluff.sk

Slovenia

Senzorji SB d.o.o.
Proizvodnja,
trgovina in storitve d.o.o.
ulica Kirbisevih 53a
2204 Miklavž na
Dravskem polju
Phone +386 2 6290300
Fax +386 2 6290302
sp.elektronika@siol.net

South Africa

Retron cc
P.O. Box 39448
Bramley, 2018
Phone +27 11 7860553
Fax +27 11 4408275
info@retron.co.za

Spain

Balluff S.L.
Edificio Forum SCV-Planta
5ª, Oficina 4ª
Carretera Sant Cugat a Rubí
Km01, 40-50
08190 Sant Cugat del Vallés
Barcelona
Phone +34 93 5441313
Fax +34 93 5441312
info@balluff.es

Sweden

Balluff AB
Industrivägen 2
43361 Sävedalen
Phone +46 31 3408630
Fax +46 31 3409431
info.se@balluff.se

Switzerland

Balluff Sensortechnik AG
Riedstrasse 6
8953 Dietikon
Phone +41 43 3223240
Fax +41 43 3223241
sensortechnik@balluff.ch

Taiwan

Canaan Electric Corp.
6F-5, No. 63 Sec. 2
Chang An East Road
Taipei
Phone +886 22 5082331
Fax +886 22 5084744
canaan1@ms15.hinet.net

Thailand

Compomax Co. Ltd.
16 Soi Ekamai 4,
Sukhumvit 63 Rd.
Prakanongnua, Vadhana,
Bangkok 10110
Phone +66 2 7269595
Fax +66 2 7269800
info@compomax.co.th

Turkey

Balluff Sensor Otomasyon
Sanayi Ve Ticaret Ltd. Sti.
Perpa Ticaret Is Merkezi
A Blok, Kat 1-2-3
No: 0013-0014
34381 Okmeydanı/Istanbul
Phone +90 212 3200411
Fax +90 212 3200416
balluff@balluff.com.tr

Ukraine

Micronlogistic
37, Promyischennaya St.
Odessa, 65031
Phone +380 482 358760
Fax +380 482 358760
logistic@micron.odessa.ua

USA

Balluff Inc.
8125 Holton Drive
Florence, KY 41042-0937
Phone +1 859 727-2200,
Toll-free 1-800-543-8390
Fax +1 859 727-4823
balluff@balluff.com

Venezuela

Balluff Controles
Eléctricos Ltda.
Brazil


Sales Regions

Balluff GmbH
Sales Region North
Woltorfer Strasse 77c
31224 Peine
Phone 05171 5878-0
Fax 05171 17223
srn@balluff.de

Balluff GmbH
Sales Region East
Reichenhainer Mühlberg 184
09125 Chemnitz
Phone 0371 81544-0
Fax 0371 815 44-15
sre@balluff.de

Balluff GmbH
Sales Region West
Leipziger Strasse 10
63571 Gelnhausen-Roth
Phone 06051 88909-0
Fax 06051 15997
srw@balluff.de

Balluff GmbH
Sales Region South
Gartenstraße 21-25
73765 Neuhausen a.d.F.
Phone 07158 173-189
Fax 07158 173-287
srs@balluff.de

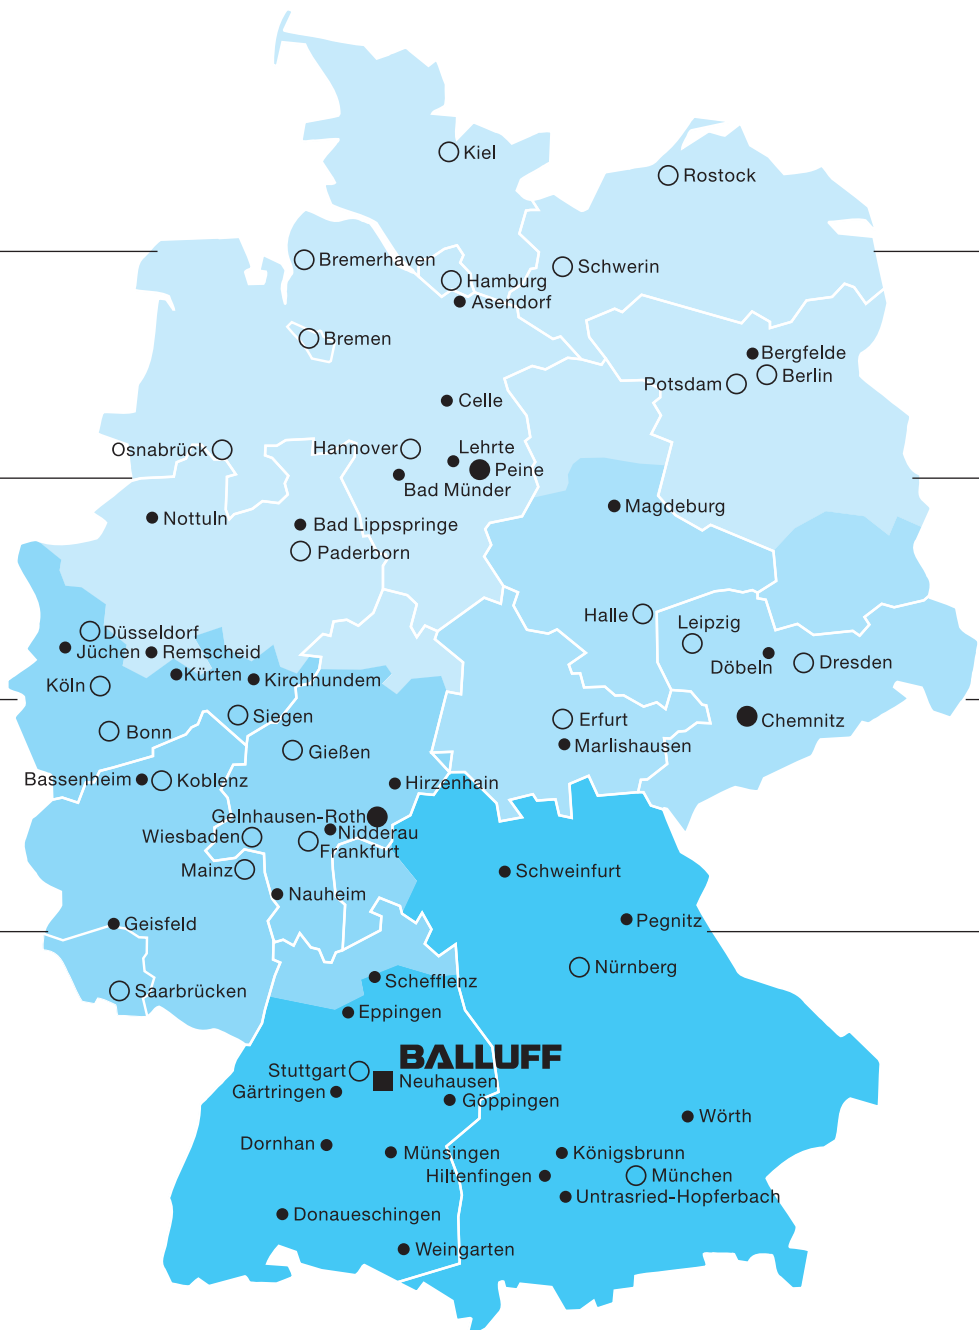

- Headquarters and Sales Region South
- Sales Region
- Regional office

Sales Region North
Postal Codes:
10000 – 34519 42000 – 46569
37000 – 37299 48000 – 49849
37400 – 38779 58000 – 58739
39300 – 39359 59000 – 59969
39510 – 39649

Sales Region East
Postal Codes:
01000 – 09999
36400 – 36469 96500 – 96529
37300 – 37359 98500 – 98749
38800 – 39299 99000 – 99999
39360 – 39449

Sales Region West
Postal Codes:
34520 – 36399
40000 – 41849 60000 – 69518
47000 – 47929 74700 – 74939
50100 – 57648 76710 – 76891
58740 – 58849 97800 – 97999

Sales Region South
Postal Codes:
70000 – 74679
75000 – 76709
77600 – 79879
80000 – 96489
97000 – 97799

Headquarters

Balluff GmbH
Schurwaldstrasse 9
73765 Neuhausen a.d.F.
Phone 07158 173-0
Fax 07158 5010
balluff@balluff.de
www.balluff.com

General Information



Principles of Mechanical and Inductive Single and Multiple Position Switches



Mechanical Single and Multiple Position Switches

1.1

Mechanical Single and Multiple Position Switches with Safety Switch Positions

1.2

Mechanical Single and Multiple Position Switches with Forced Opening

1.3

Mechanical Multiple Position Switches with Quick-Change Plunger Unit

1.4

Inductive Single and Multiple Position Switches

2.1

Inductive Multiple Position Switches with Extended Switching Distance 4 mm

2.2

Special Form Factors

3

Wireless System

4

Mechanical and Inductive Switch Elements

5.1

Cam Trays and Cams

5.2

Connectors and Function Indicators

5.3

Object Detection



Sensor Line

Inductive Sensors DC 3-/4-wire
Inductive Sensors DC 2-wire
Inductive Sensors AC/DC
Inductive Sensors with special properties
Sensors for Pneumatic Cylinders
Magnetic Field Sensors
Capacitive Sensors



Photoelectric Line

Diffuse energetic with fore- and background suppression
Retro-reflective Sensors
Through-beam Sensors (emitter/receiver)
Fiberoptic Systems
Slot Sensors
Optical Window Sensors
Light Grids
Contrast Sensor
Luminescence Sensors
Color Sensors
Photoelectric Distance Sensors



Mechanical Line

Mechanical Single and Multiple Position Switches
Mechanical Single and Multiple Position Switches with safety switch positions
Mechanical Single and Multiple Position Switches with forced opening
Mechanical Single and Multiple Position Switches with quick-change plunger unit
Inductive Single and Multiple Position Switches
Inductive Multiple Position Switches with extended switching distance 4 mm
Special form factors
Wireless System



Linear Position and Measurement



Displacement Sensing Line

Micropulse® Transducer BTL profile series
Micropulse® Transducer BTL AT series
Micropulse® Transducer BTL rod series
Micropulse® Transducer BTL compact rod series
Micropulse® Processors, BUS modules
Magnetic Linear Encoder Systems BML
Incremental and Absolute Encoders BDG/BRG
Inductive Linear Position Sensor BIW
Inductive Distance Sensors BAW
Magneto-inductive Position Sensors BIL
Photoelectric Distance Sensors BOD



Industrial Identification



Industrial Identification

Industrial RFID Systems BIS C
Industrial RFID Systems BIS L
Industrial RFID Systems BIS M
Industrial RFID Systems BIS S
Vision Sensor BVS



Industrial Networking and Connectivity




Industrial Networking and Connectivity

Connectors BKS
Splitter Boxes BSB
Valve Connectors BNI
IO-Link
Remote Inductive Transmission Systems
BUS Systems
Wireless
Electrical Devices



Mechanical Accessories



Mechanical Accessories

Attachments
Mounting System BMS



Please check and send fax!



We also offer a compilation
of our entire product lines on
CD-ROM or DVD-ROM!



Full product line on CD-ROM



DVD-ROM Full product line with 3D data



Fax +49 7158 173-299

Company

Name

Department

Street


Postal code/city

Phone

Principles

In this section we cover the key concepts, technical details, conditions of use, standards, etc.

10	Applications
12	Design/Construction Form factors Standards
13	Design/Construction Form factors with safety switch positions
14	Design/Construction Form factors with quick-change plunger block
15	Switch Elements, Switching Characteristics
16	Plunger Styles
17	Plunger Systems
18	Design/Construction of Inductive Single and Multiple Position Switches
19	Function Descriptions, Definitions, Protection Circuits Standards
22	Quality
23	Quality
24	Special Solutions
26	Product Overview

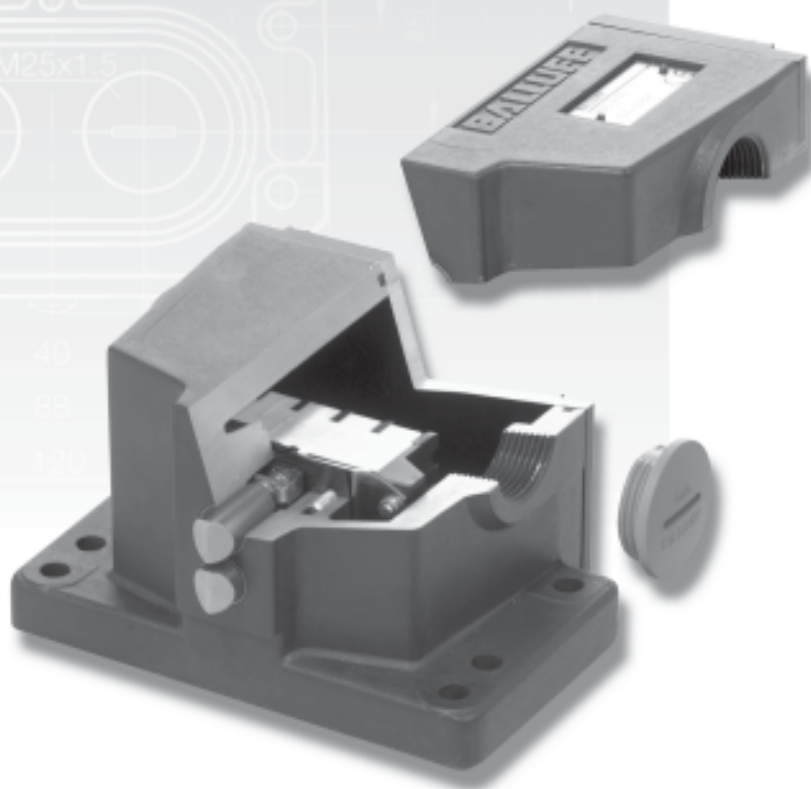

Single and multiple position switches are used as actuators for automatic controls, for positioning and for end-of-travel switching on machine tools, transfer lines, transport equipment, in the automobile industry and in machine and equipment building.

Their proven design principle and large number of possible switching operations as well as consistent inspection ensure lasting quality and reliability.

Reliable switching under extreme conditions

Balluff single and multiple position switches have been proven for decades under harsh conditions. They ensure trouble-free function under conditions of vibration, shock, rapid temperature fluctuations, aggressive coolants and heavy presence of chips. Inductive single and multiple position switches are also characterized by high electromagnetic compatibility.

Safety of man and machine

For safety functions such as E-Stop or end-of-travel restriction, Balluff designs special safety switches to DIN EN 60204-1/ VDE 0113, which offer the highest level of safety.




more added value

Proof of safety for mechanical switches is easier to verify than for electronic products.

more added value

High reliability and mature technology for high system availability and economy in production.

The automation classics – Single and multiple limit switches custom tailored for you

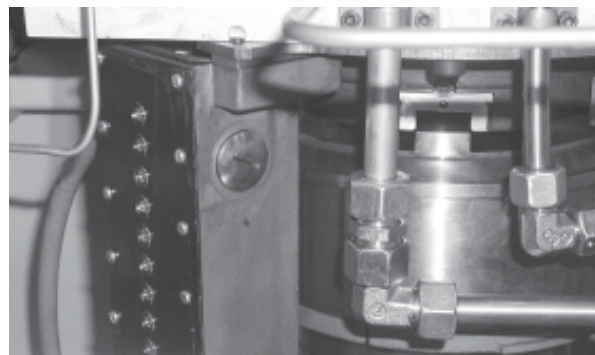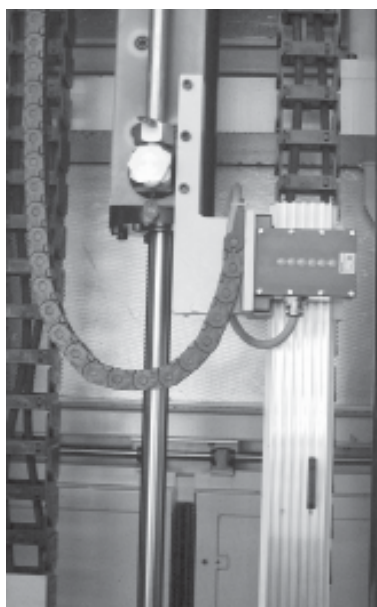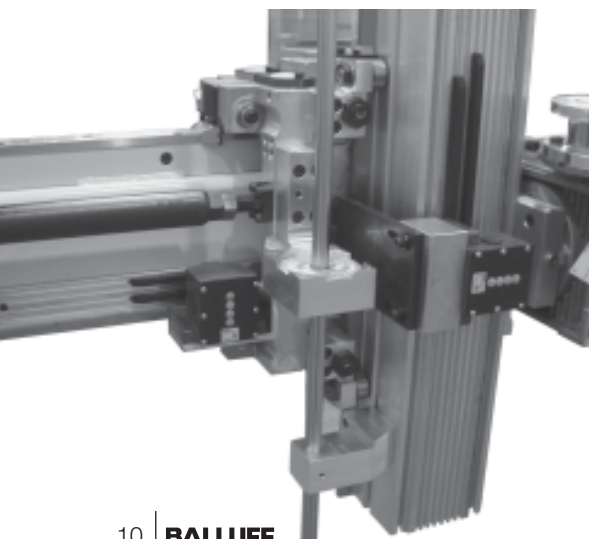

For standard applications

Mechanical single and multiple position switches

The switching operation is performed using a telescoping plunger. This plunger is used to switch a mechanical switching element in a separate, sealed chamber. Optimum selection of the plunger style in combination with our cams guarantees long service life.

Features

- Maintenance-free, self-lubricating slide bearing bush. Slide bearing constructed of three layers: Steel back, bronze and Teflon coating.
- Lowest coefficient of friction
- Can be continuously run without lubrication
- Plunger will not stick after production is stopped even when aggressive coolants are used
- Optional function indicators
- Optional inductive switch elements

For safety applications:

Single and multiple limit switches with safety switch positions per DIN EN 60204-1/VDE 0113

The switching operation is initiated by a rigid plunger which actuates a mechanical switching element with positive-opening contacts per DIN EN 60204-1/VDE 0113.

Features

- Housing styles and sizes for a variety of applications
- Various plunger spacings
- Up to 12 switch positions
- Rigid chisel plungers for reliable switching
- Creep or snap switch elements with positive opening in accordance with DIN EN 60204-1/VDE 0113 for the greatest possible safety
- Maintenance-free
- Optional function indicators

Catalog and custom products

Standard switches and application-specific switches

For applications with standardized mounting and function dimensions we offer switches per DIN 43693 and DIN 43697. The product range is supplemented by switches with application-specific dimensions.

more added value

Optimized for your application requirements.
Customized products also available.



Mechanical and inductive single and multiple position switches – Position sensing for general machine building

Construction of mechanical single and multiple position switches

A maintenance-free, self-lubricating plunger guide guarantees reliable switch function.

We offer these switches in a standardized housing per DIN 43693 or DIN 43697. Additional form factors can be found on the following pages.

Highly elastic, wear-free **membrane** made of Viton is used for hermetic sealing between the plunger mechanism and switch interior. This dual chamber design allows us to guarantee an IP 67 rating.

The seals are a critical element for the quality of our products. This is why we use only Viton today for the membrane, cover gasket and O-rings. Compared with the previous NRB material, Viton offers improved resistance to aggressive media over a large temperature range and under pressure.

Snap and creep switch elements are available as changeover contacts with self-cleaning effect. A variety of switch elements can be used. The creep switch element opens and closes depending on the speed with which it is actuated. The snap switch element opens regardless of its actuation speed.


Function indicator for the switch positions with LED possible (option). Standard configuration: Metric fitting per EN 50262 or connector S80/S90 (option).

The threads on factory installed connectors are sealed.



IO-Link

- 3-wire M12 connection
- No cable gland needed, factory sealed to IP 67
- Can be connected in seconds
- COM2 mode (38.4 Kbaud)
- Service data (N.O./N.C. parameter)
- Fitted standard with S4 connector
- Available for all standard form factors

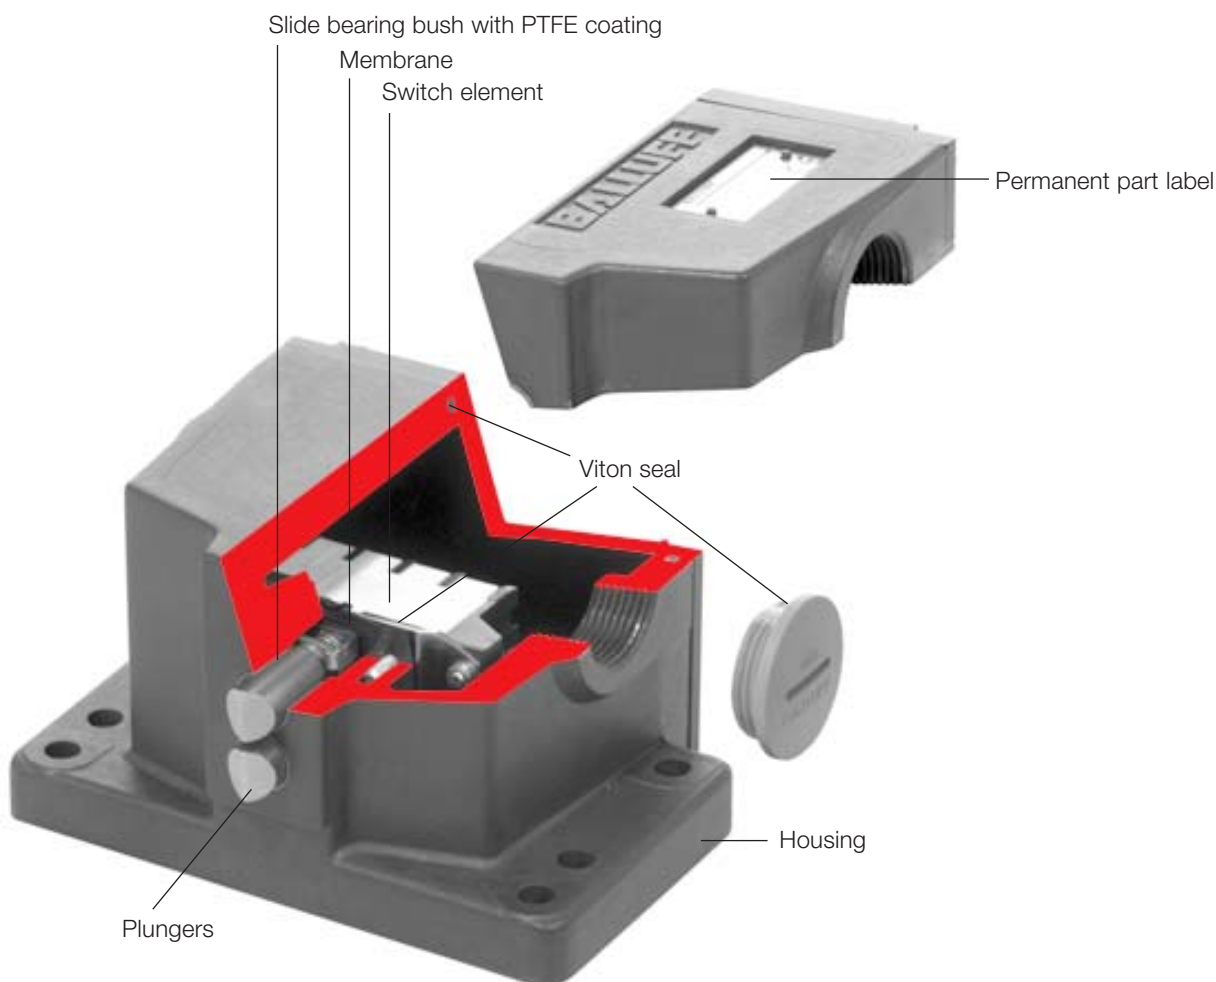

Construction of the safety switch position

- BSE 61 creep switch element or BSE 85 snap switch element with positive opening per DIN EN 60204-1/ VDE 0113 (see page 116 for technical details)
- For optimum safety we recommend chisel plungers

Available series


Safety switch positions can be installed in Series 100, 62, 61, 72 and F 60 single and multiple position switches.

Switch position combinations

Switches with safety switch positions can be assembled using both other mechanical elements and inductive elements. Such mixed assemblies can be provided on request. Refer also to Section 3.

Note!

Cams for safety switch positions must be installed to fit.

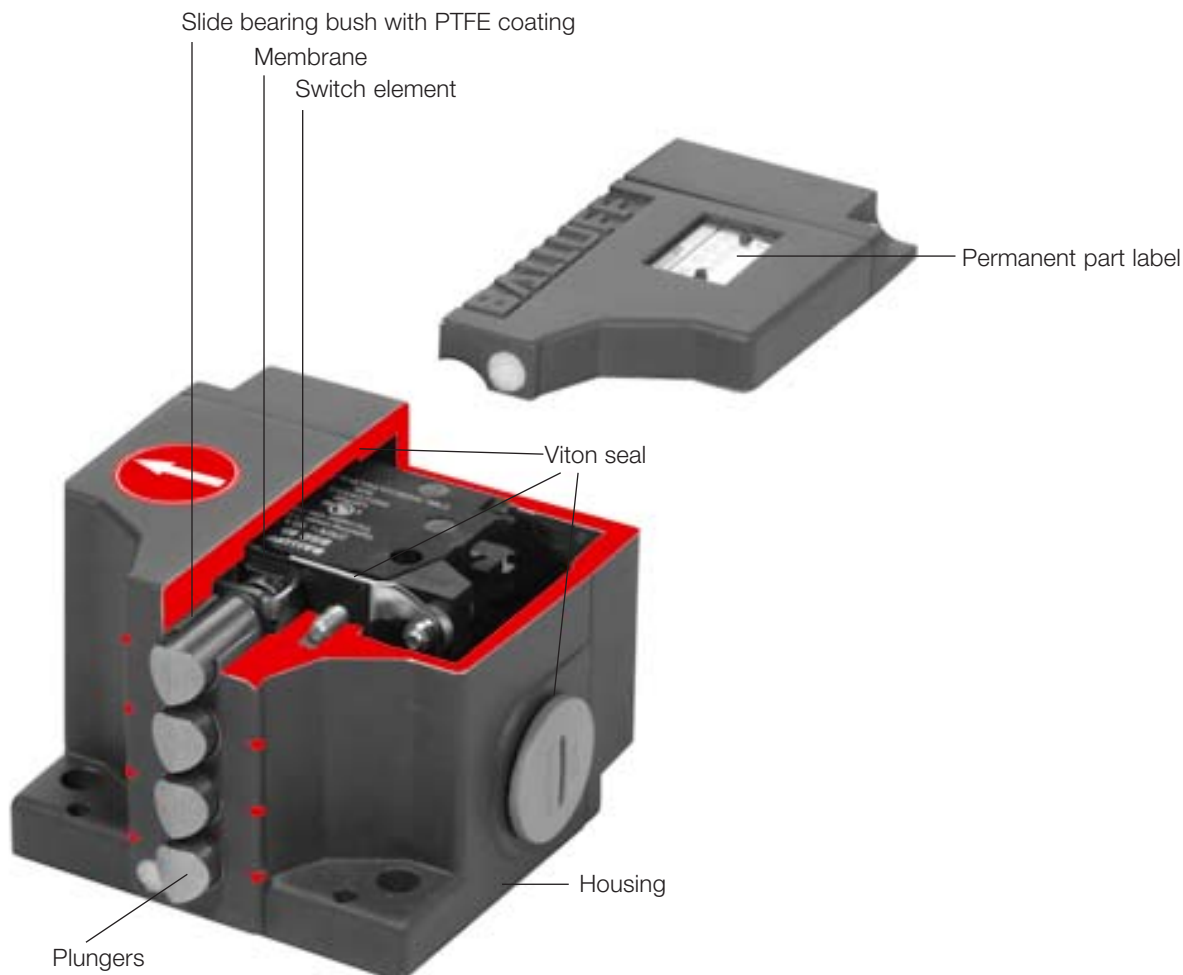

Balluff multiple position switches have for decades proven themselves under the most difficult conditions. The design principle and large number of possible switching types and configurations as well as consistent quality inspection ensure the highest level of quality and reliability.

The plungers are the only moving parts outside of the housing and are subjected to daily exposure to a wide range of unavoidable influences such as

- Abrasive materials
- Weld splatter
- Strongly resinating coolants and lubricants
- Long cam travel
- High speeds

For such applications Balluff offers the Series 100 and 61 switch family with quick-change plunger block as an option to the standard multiple limit switches.

The Balluff multiple position limit switch with quick-change plunger block makes time-consuming plunger replacement a thing of the past. In just a few moments the complete block system can be replaced without the use of special tools and without the risk of wiring mistakes.

The advantages of the quick-change unit as a problem solver are clear:

- Minimal machine downtime
- Low repair costs
- No wiring mistakes
- Simple to install
- Can be used even in the harshest conditions
- No special knowledge necessary
- Plungers are individually replaceable
- Degree of protection IP 67




The right switch element for every application

The switch element determines the switching behavior and, in emergency cases, the switching safety. Balluff offers switch elements for various functions.

Switch characteristics

The respective application needs to be taken into account when selecting plungers and switch elements.

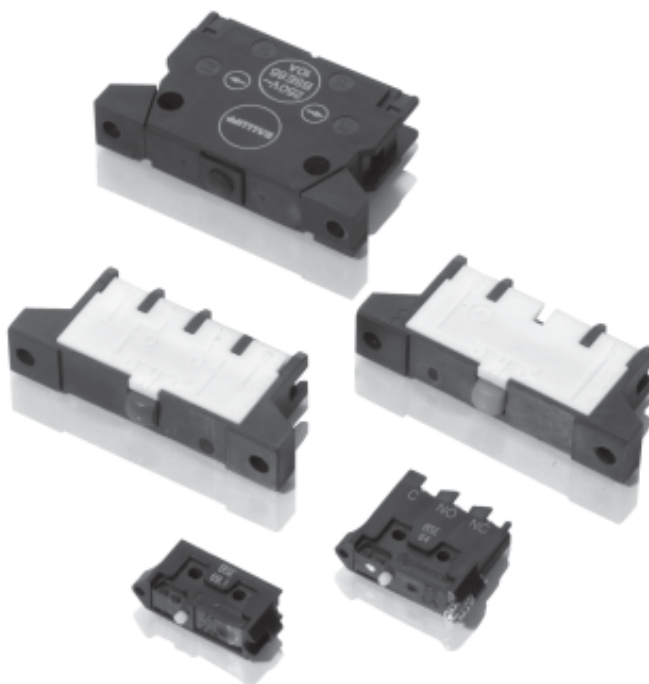

Switch elements for standard applications

Switches for standard applications without safety function are fitted with snap switch elements. Available are:


Snap switch element BSE 30.0

Dual changeover, one normally open and one normally closed, galvanically isolated.



Snap switch elements BSE 69.1/70.1/73.1/74.1

Single-pole changeover




Additional characteristics:
Snap switch elements BSE 73.1 or BSE 74.1 have specially formed gold contacts making them suitable for low currents from 10...100 mA.

Switch element with positive opening

were developed for small series. Typical applications include end-of-travel sensing. Available are:

Snap switch element BSE 64, BSE 63

Single-pole changeover, NO with snap function, NC with forced opening




Switch elements with safety functions

for E-Stop and end-of-travel restriction. These have positive-opening contacts conforming with DIN EN 60204-1/VDE 0113. Available are:

Creep switch element BSE 61

NC, double-interrupting, positive-opening.




Snap switch element BSE 85

Dual-changeover:
1. Dual-changeover (snap function), 2. Positive-opening (double-interruption), all galvanically isolated




Chisel plunger for short actuation travel




- max. approach velocity 12 m/min
- Typical cam length 100 mm
- Defined approach direction
- Repeatability up to ± 0.002 mm
- Recommended in conjunction with rigid plunger for safety applications
- Hardened, polished contact surface
- Angle of slope 30°
- Hardness 58 HRC

Roller bearing plunger for long actuation travel




- max. approach velocity 120 m/min
- Typical cam length 1000 mm
- Defined approach direction
- Repeatability up to ± 0.01 mm
- Not recommended in safety positions
- Low-noise
- Hardness 58 HRC

Roller plunger for medium actuation travel



- max. approach velocity 50 m/min
- Typical cam length 500 mm
- Defined approach direction
- Repeatability up to ± 0.01 mm
- Not recommended in safety positions
- Hardness 58 HRC

Ball plunger actuation from any direction



- max. approach velocity 10 m/min
- Repeatability up to ± 0.002 mm
- Not recommended in safety positions
- Hardened ball
- Hardness 58 HRC

Dimensions of

Roller and roller bearing plungers

	Series 46, 40, 99, 100	Series 100, 62, 61, 72, F 60
Plunger diameter in mm	6	10
Roller diameter in mm	5	7.8
Roller width in mm	2.8	3.8
Roller bearing diameter in mm		8
Roller bearing width		3.6

The specified approach speeds for all plunger styles apply only in combination with **Balluff mechanical cams** (see page 126)




Telescoping plunger mechanism

prevents overloading of the switch element, increases the service life and protects the plunger from sticking. For safety switches the use of rigid plungers is required.

Telescoping plungers

For standard switch positions


- Maintenance-free, self-lubricating slide bearing bush with Teflon coating (PTFE)
- Can be dry-run in continuous operation with no lubrication
- Lowest coefficient of friction
- Resistant to chemical effects

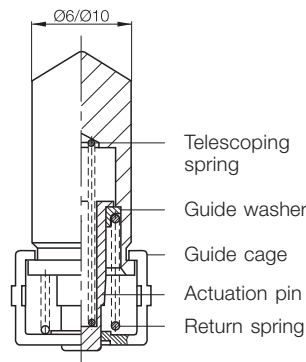

Rigid plunger

For use with forced separation and positive opening safety switch positions conforming with DIN EN 60204-1/VDE 0113


- Reliable opening of the switching circuit even when overload causes contact welding
- In addition to all the positive features of the telescoping plunger

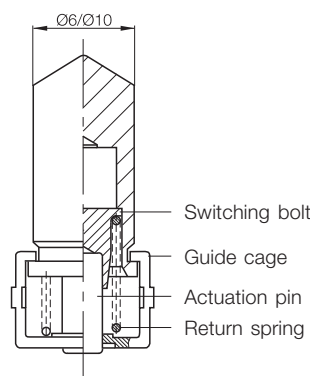

Telescoping plunger Chisel with wiper plate

Encapsulated version for extreme applications


- One-piece, easily replaceable plastic plate with wiper edge
- Protection against sticking, hardened coolants and lubricants
- Breaks up sticking, hardened coolants
- Slide bearing bush is kept clean
- Ideal for use in processing cast materials

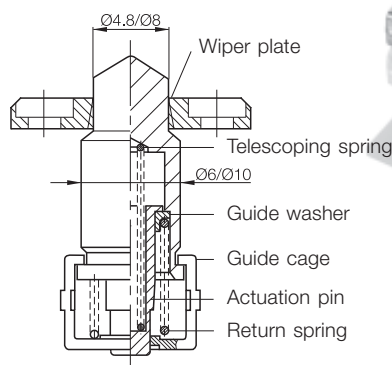

Rigid plunger Chisel with wiper plate

For use with forced separation and positive opening safety switch positions conforming with DIN EN 60204-1/VDE 0113

- Reliable opening of the switching circuit even when overload causes contact welding
- In addition to all the positive features of the telescoping plunger

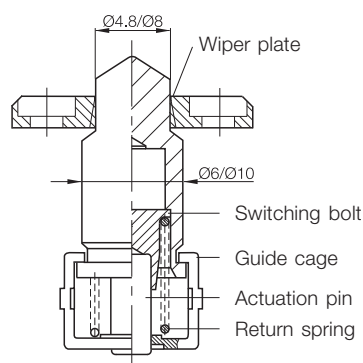

These switches use the same housing as for the mechanical versions. The switching function is handled by an inductive switch element whose active surface is damped contactlessly by the approach of special electronic cams.

Machine-compatible **housing** per DIN 43697 made of a special cast aluminum alloy or application-specific, absolutely deformation resistant.

Sensing face, material PA 12, insensitive to aggressive coolants.

High quality Viton seal, insensitive to aggressive coolants (enclosure rating IP 67).

The threads on factory installed connectors are sealed.

Inductive switch elements available in two sensing head diameters, 3-/4-wire (DC PNP and NPN), 2-wire (AC and DC), NAMUR.

Function indicator for each switch position with LED available (except NAMUR).

Metric fittings, cable glands or connectors, flexible cabling for each position.

Switching distances

For adapting to various working distances we offer switch elements with the following rated switching distances s_n :

- 0... 1.1 mm
- 0... 2 mm
- 0... 5 mm

Inductive switch elements with extended switching distance available on request!

Utilization categories


per EN 60947-5-2/
IEC 60947-5-2

Category


AC 12	AC-switch
AC 140	AC-switch
DC 12	DC-switch
DC 13	DC-switch

Typical load applications

Resistive and semiconductor loads, optocouplers
Small electromagnetic load $I_a \leq 0.2$ A; e. g. contactor relay
Resistive and semiconductor loads, optocouplers
Electromagnets

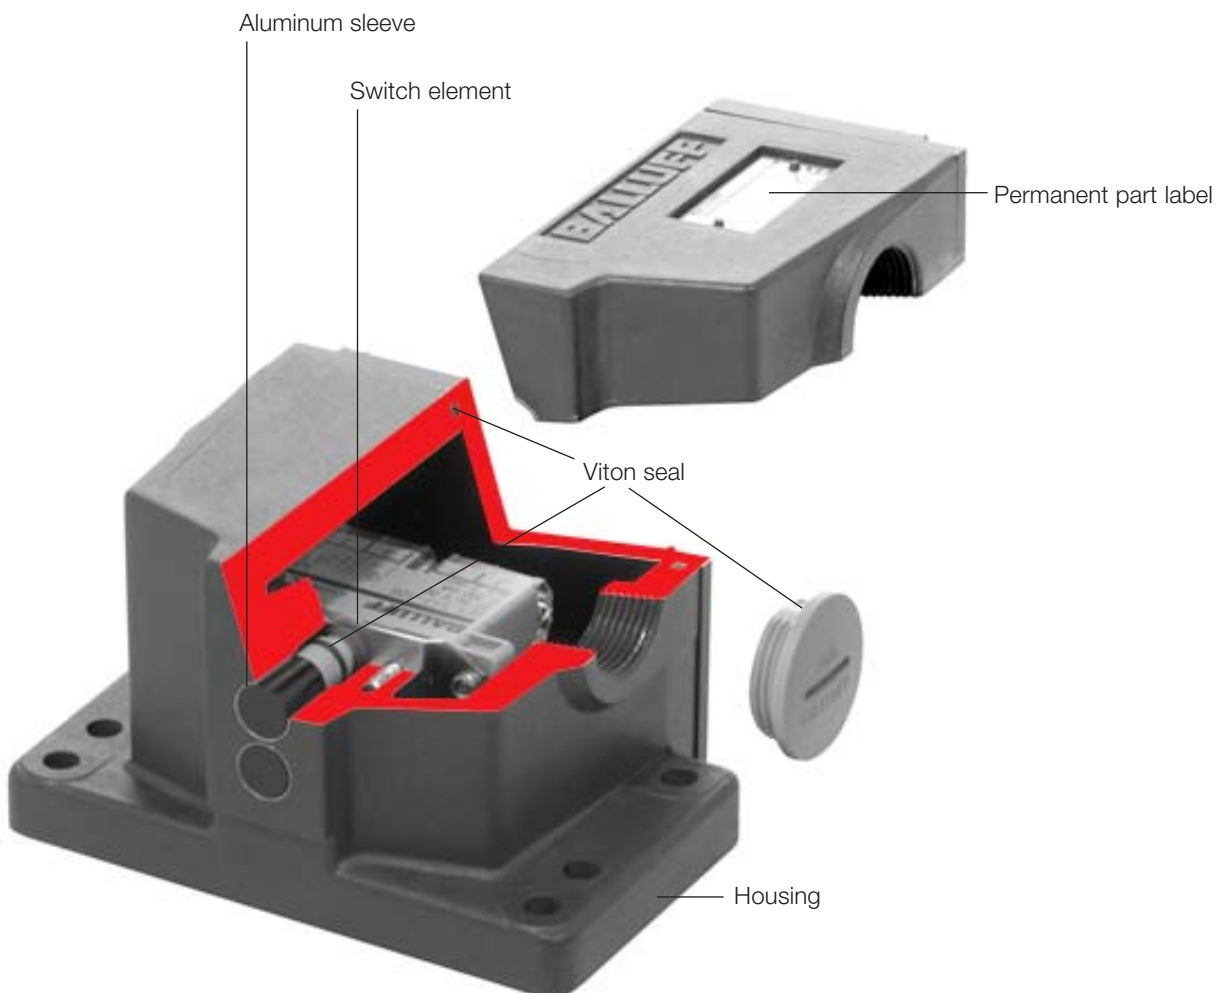

Supply voltage U_B	... is the permissible voltage range in which certain safe operation of the switch is guaranteed (including ripple σ).
Voltage drop U_d	... is the voltage measured across the load of a closed (conducting) switch element at load current I_e .
Rated operating current I_e	... is the permissible constant output current that may flow through the load R_L .
Off-state current I_r	... is the residual current flowing through the load when a switch element is not conducting (open).
Inrush capacity I_k	... in the case of alternating current indicates the current I_k (A _{eff}) which is permitted to flow during a given turn-on time t_k (ms) and at a given frequency (Hz).
Minimum operating current I_m	... is the smallest load current required for function of the switch element when ON.
Ambient temperature range T_a	... is the temperature range over which the function of the switch is guaranteed..
Rated operating distance s_n	... is a theoretical value, which does not take into account manufacturing tolerances, operating temperatures, supply voltages, etc.
Effective operating distance s_r	... is the switching distance of a single inductive switch element measured under the specified conditions (installation, voltage, temperature). $T_a = +23\text{ °C} \pm 5$ ($0.9\ s_n \leq s_r \leq 1.1\ s_n$)
Useful operating distance s_u	... is the permissible switching distance of an individual switch element within the specified voltage and temperature conditions. ($0.81\ s_n \leq s_u \leq 1.21\ s_n$).
Assured operating distance s_a	... is the switching distance at which assured operation of the switch element is guaranteed at specified voltage and temperature conditions. ($0 \leq s_a \leq 0.81\ s_n$).
Hysteresis H (switching hysteresis when target is backed off)	... is given as a percentage of the effective operating distance s_r . It is measured at an ambient temperature of $+23\text{ °C} \pm 5$ and at the rated operational voltage. It must be less than 20 % of the effective operating distance (s_r). $H \leq 0.2\ s_r$

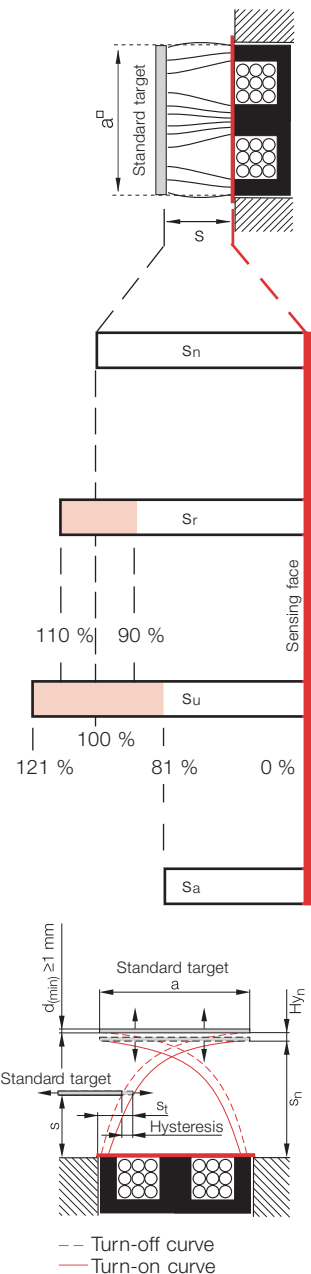


Switching frequency f	... refers to the maximum number of switching operations per second.	Damping is per EN 60947-5-2 with standard targets on a rotating, non-conducting disk. The surface area ratio of iron to non-conductor must be 1 : 2.	The rated value of the switching frequency is reached when – either the turn-on signal $t_1 = 50 \mu s$ or the – turn-off signal $t_2 = 50 \mu s$.
Polarity reversal protected	... protected against any possible lead reversal for inductive switch elements with short circuit protection.	... against reversal of plus/minus leads for inductive switch elements without short circuit protection.	
Short circuit protected with maximum voltage 60 V DC)	... is achieved for inductive switch elements with pulsing or thermal short circuit protection. The output stage is thereby protected against overload and short circuit.	The trigger current for the short circuit protection is higher than the rated operating current I_e . Currents from switching and load capacitances are specified in	the sensor data and do not result in triggering, but rather are masked by a short delay in the output circuit.
Short circuit/overload protected (for operating with AC or DC supply)	... AC or AC/DC sensors are often operated with a relay or contactor as the load. AC switching devices (contactors/relays) create a significantly higher load ($6...10 \times$ rated current) when they are first energized as compared with their static operation due to the fact that the core is still open. The static value of the load (current) is not reached until several milliseconds later.	Not until the magnetic field is closed does the max. permissible rated operating current I_e flow through the sensor. This means that the threshold value for a short circuit condition in these switch elements must lie significantly higher and would, if for example the contactor is prevented for mechanical or electrical reasons from fully closing, result in an overload on the switch elements. This is where the overload protection comes into play. It is designed as slow-acting (time-delayed). Its trigger threshold lies only slightly above the maximum permissible I_e .	A response (i. e. turn-off) is delayed, depending on the magnitude of the overload, by more than 20 milliseconds. This ensures that properly working relays and contactors can be switched normally, while defective devices will not destroy the Balluff switch elements. The short circuit/overload protection is generally of a bi-stable design, which means that it must be reset by turning off the supply voltage to the switch element.


Series connection

... can cause a time delay (e. g. start-up delay). The number of connected switch elements is limited by the total voltage drop (sum of all U_d). In the case of 2-wire sensors it is limited by the addition of the minimum supply voltages. For 3-wire switches, the load capacity of the output stage represents a further limitation, since the current consumption I_0 of all switches is added to the rated current I_e . The ready delay time t_v is the ready delay of a sensor $\times$ (number of sensors $n-1$).

3-wire DC switch elements

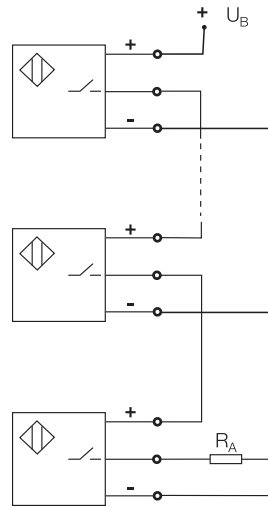


2-wire DC switch elements (AC/DC)

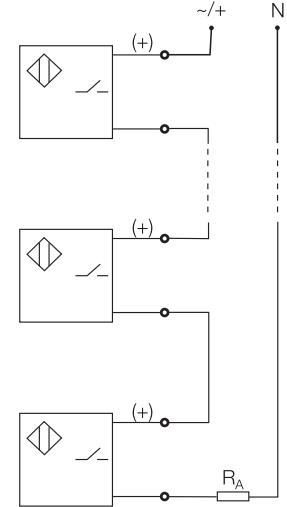

For parallel connection

... of switch elements with LED it is recommended that the outputs of the individual switches be decoupled using diodes (as shown). This prevents all LED's from lighting-up when the output stage of one switch is turned on.

3-wire DC switch elements

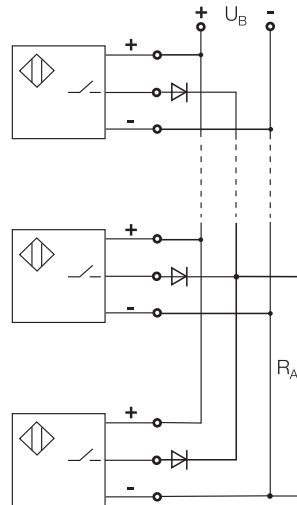

2-wire DC switch elements

Parallel wiring of 2-wire switch elements is not recommended, since missed pulses can be caused by the ready delay while the oscillation is built up.

Switch	Multiple position switches	DIN 43697
	Single position switches	DIN 43693
	Single and multiple position switches with safety switch positions	DIN EN 60204-1/VDE 0113 Part 1
	Metric fitting	EN 50262
Enclosure rating	IP 67	EN 60529/IEC 60529
EMC (electromagnetic compatibility) for switches with inductive switch elements	RF emission from electrical equipment	EN 55011
	Static discharge immunity (ESD)	EN 61000-4-2
	Immunity to electromagnetic fields (RFI)	EN 61000-4-3
	Immunity to fast transients (burst)	EN 61000-4-4
	Immunity to line-carried noise induced by high-frequency fields	EN 61000-4-6
	Surge-voltage stability	EN 60947-5-2
Environmental simulation	Vibration, sinusoidal Frequency range: 10...500 Hz Amplitude: 3 mm _{P-P} /20 g Oscillation duration: 40 sweeps in 3 axes	EN 60068-2-6/IEC 60068-2-6
	Shock Pulse shape: half-sine Peak acceleration: 100 g Pulse duration: 6 ms Number of shocks: 25 positive, 25 negative in 3 axes	EN 60068-2-27/IEC 60068-2-27
	Continuous shock Pulse shape: half-sine Peak acceleration: 100 g Pulse duration: 6 ms Number of shocks: 4000 positive, 4000 negative in 3 axes	EN 60068-2-29/IEC 60068-2-29



Quality Management System

per DIN EN ISO 9001:2000

Balluff company

Balluff GmbH	Germany
Balluff Elektronika KFT	Hungary
Nihon Balluff Com. Ltd.	Japan
Balluff U.K. Ltd.	Great Britain
Balluff Automation s.r.l.	Italy
Balluff Inc.	USA
Balluff GmbH	Austria
Balluff CZ	Czech Republic
Hy-Tech AG	Switzerland
Balluff Sensortechnik AG	Switzerland
Balluff Controles Eléctricos Ltda.	Brazil

Environmental Management System

per DIN EN ISO 14001:2005

Balluff company

Balluff GmbH	Germany
Balluff Elektronika KFT	Hungary

Balluff products meet the EU Directives

Products requiring marking are subjected to a conformity evaluation process according to the EU Directive and the product is marked with the

CE Marking. Balluff products fall under the following EU Directives:

2004/108/EG	EMC Directive
2006/95/EG	Low-Voltage Directive
	applies to AC and AC/DC sensors



Approvals

... are granted by national and international institutions. Their symbols affirm that our products meet the specifications of these institutions.

„US Safety System“ and „Canadian Standards Association“ under the auspices of Underwriters Laboratories Inc. (cUL).

CCC Marking by the Chinese CQC.

Balluff is a member of ALPHA

ALPHA, an association for testing and certification of low-voltage devices, promotes the individual responsibility of the manufacturer of such devices by means of uniform test procedures according to current standards and thereby supports the attainment of high product quality.

ALPHA also grants nationally recognized product certificates when certain prerequisites are met. Through ALPHA's membership in LOVAG (Low Voltage Agreement Group), its certificates are also recognized in other European countries.





Zone monitoring on robots


One task – two solutions

If two physical channels (1 normally and 1 normally closed) are powered by a switching power supply, this will enable cross-connection detection. In such a system different signals must be sent to the controller.


In case of error (short circuit, miswiring, ...) both signals are identical and are recognized by the controller as a cross-connection fault condition. Monitoring can be handled by a safety programmable controller or with a Pilz safety switching device.

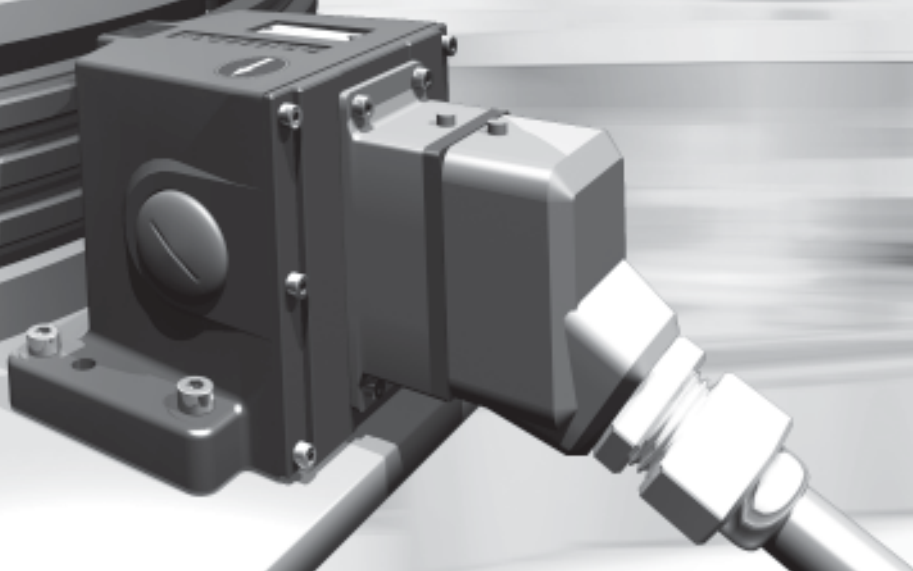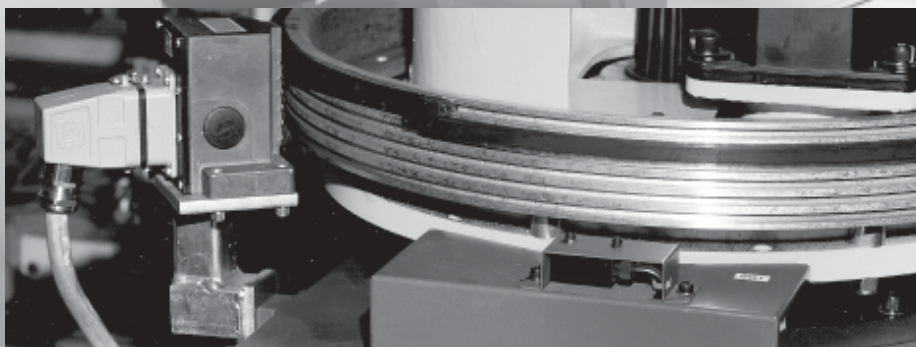



Axis 3



Axis 2



Axis 1

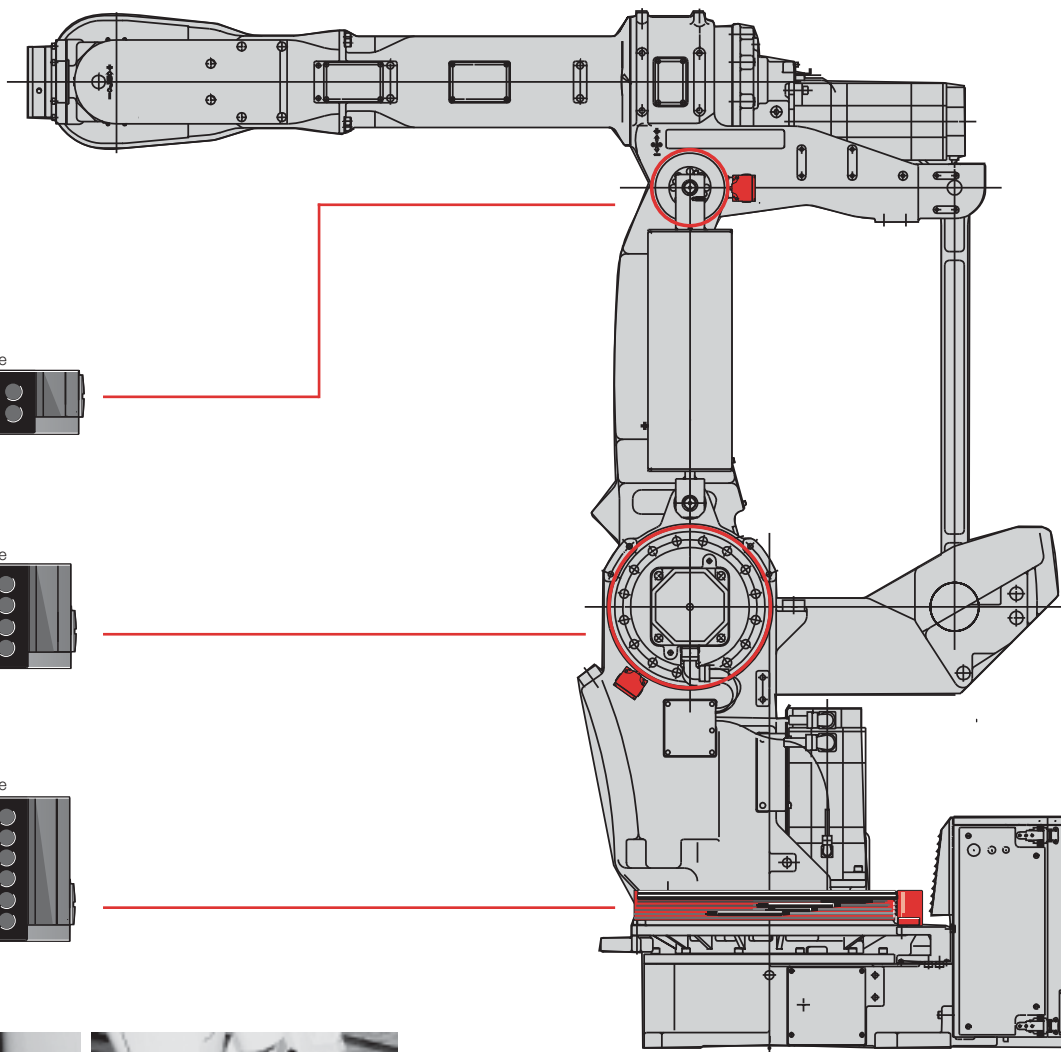



Two solutions – simple installation and setup of the allowed zone

Solution 1 Mechanical switches – the classic solution

- Reliability assured by rugged cast housing for harsh industrial environments
- Safety ensured by switch elements with positive-opening contacts and rigid plungers as well as proper selection of the cam tracks
- Long service life thanks to maintenance-free, self-lubricating plunger guide with slide bearing bush

Solution 2 Inductive switch – the modern solution

- Likewise in rugged cast housing for harsh industrial applications
- Function monitoring using safety controller with pulsed supply voltage for the switches
- Non-contacting, wear-free,
- For extremely high traverse speeds



Page

Mechanical single and multiple position switches

Series 100
page 30
CE, CCC, CSA

Series 62
page 32
CE, CCC, CSA

Series 61
page 34
CE, CCC, CSA

Mechanical single and multiple position switches with safety switch positions

Series 100
page 48
CE, CCC, CSA

Series 62
page 50
CE, CCC, CSA

Series 61
page 52
CE, CCC, CSA

Mechanical single and multiple position switches with forced opening

Mechanical multiple position switches with quick-change plunger unit

Series 100
page 68
CE

Series 61
page 72
CE

Inductive single and multiple position switches

Series 602-11
page 80
CE, CCC

Series 610...613-11
page 82
CE, CCC

Inductive multiple position switches with extended switching distance 4 mm

Series X603-...-602-11
page 97
CE, CCC

Series X603-...-610-11
page 98
CE, CCC

Special form factors

Series 602-11
page 102
CE, CCC

Series 610...613-11
page 102
CE, CCC

Wireless system

Mechanical and inductive switch elements

page 116...

page 116...

page 116...

Cam trays and cams

page 124...

page 124...

page 124...

Connectors and function indicators

page 132...

page 132...

page 132...

Features

- Mounting and function dimensions per DIN 43697
- IO-Link on request

- Smaller flange dimensions compared with Series 100
- Smaller cable wiring chamber
- IO-Link on request

- Compact housing with smaller cable wiring chamber
- IO-Link on request



				
Series 72 page 36 CE, CCC, CSA	Series 46 page 38 CE, CCC, CSA	Series 40 page 40 CE, CCC, CSA	Series F 60 page 42 CE, CCC	Series 99/100 page 44 CE, CCC
Series 72 page 54 CE, CCC, CSA			Series F 60 page 56 CE, CCC	
	Series 46 page 60 CE	Series 40 page 62 CE		Series 99/100 page 64 CE
Series 605-11 page 84 CE, CCC	Series 603-11 page 86 CE, CCC	Series 650-11 page 88 CE, CCC	Series 161/160-H3 page 90 CE	Series 340/341/344/346-H2 page 90 CE
Series X603-...-605-11 page 99 CE, CCC				
Series 605-11 page 102 CE, CCC	Series 603-11 page 103 CE, CCC	Series 650-11 page 103 CE, CCC		
			Series F 60 page 110 CE	
page 116...	page 116...	page 116...	page 116...	page 116...
page 124...	page 124...	page 124...	page 124...	page 124...
page 132...	page 132...	page 132...	page 132...	page 132...

– Horizontal plunger arrangement


– Small housing with mounting flange
– Smallest axis distance (spacing)
– Switch elements for low power
– IO-Link on request

– Small housing
– Smallest axis distance (spacing)
– Switch elements for low power
– IO-Link on request

– Mounting and function dimensions per DIN 43693
– Compact position switch

– Smallest form factor
– Switch elements for low power

**Not for new applications.
Still available for replacements.**

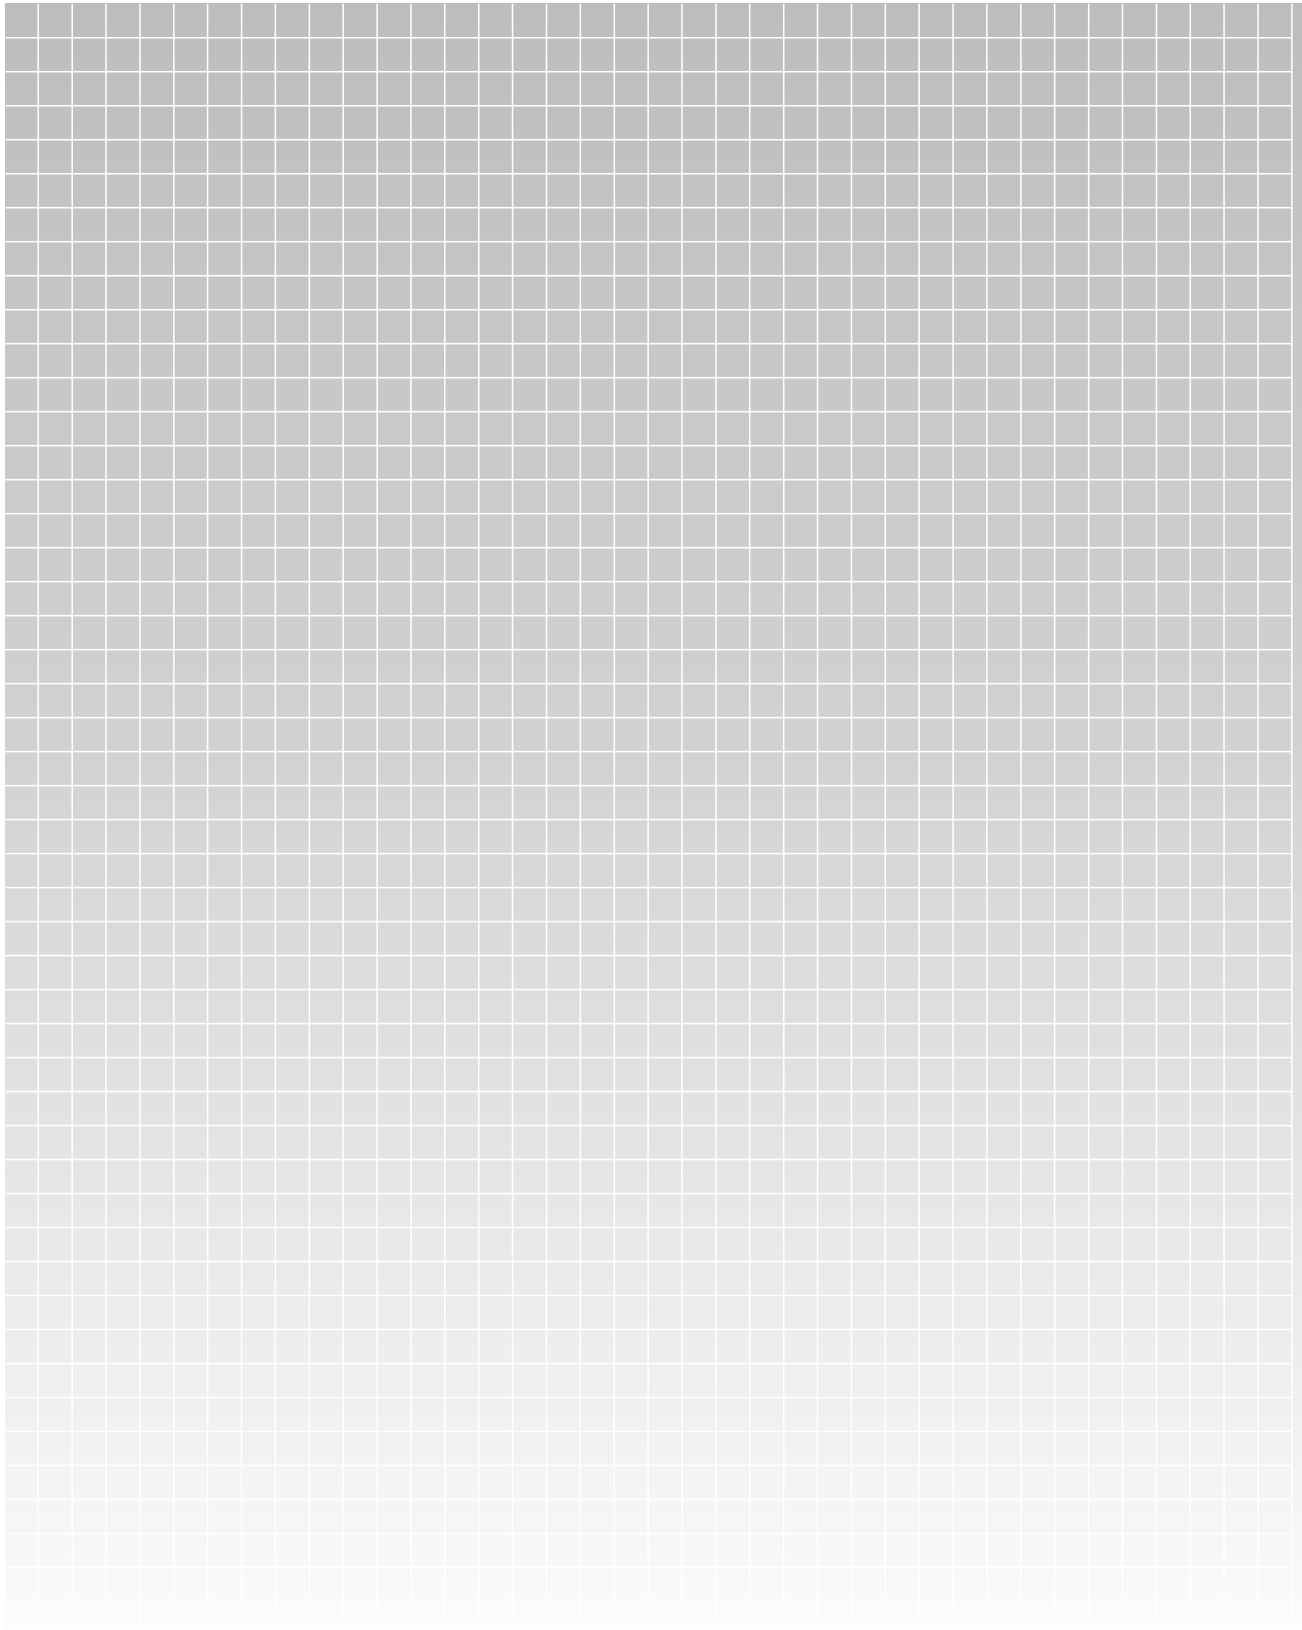

more added value

- Long service life
- Rugged housing for extreme applications

Mechanical multiple position switches

30	Series 100 per DIN 43697
32	Series 62
34	Series 61
36	Series 72
38	Series 46
40	Series 40

Mechanical single position switches

42	Series F 60 per DIN 43693
44	Series 99 and Series 100

1.1

Multiple
position
switches
series

100
62
61
72
46
40

Single
Position
Switches
Series

F 60
99
100

5.1

5.2

5.3



Multiple position switches per DIN 43697 for standard applications

- Dual-chamber system with IP 67 protection: wear-free membrane with hermetic sealing from plunger mechanism and switch chamber
- Maintenance-free, self-lubricating plunger guide with slide bearing

Multiple position switches with wiper plate

- Increased function security under extreme conditions of use
- Wiper plate prevents plunger from sticking in the guide
- For use in wet areas with strongly adhering media


Connection options

- Thread for cable gland M25×1.5 on side and in flange (Gaskets and plugs included)
- Connector (note permissible operating voltage for the connectors, see page 132).

Multiple position switches with function indication

- Function indication for dual voltage range option

Available sizes



Number of plungers	2	3	4	5	6	8	10	12
Dimension l ₁ = 12 mm	70	80	90	105	120	140	170	200
Dimension l ₃	88	88	88	88	88	80	80	80
Dimension l ₄	14	14	14	14	14	20	20	20
Dimension l ₁ = 16 mm	70	90	105	120	140	170	200	240
Dimension l ₃	88	88	88	88	80	80	80	80
Dimension l ₄	14	14	14	14	20	20	20	20
Number of connectors								
S80 without FD/FE	1	1	2	2	2			
S80 with FD/FE	1	2	2	3	3			
S90 without FD/FE	1	1	1	1	1	1	1	2
S90 with FD/FE	1	1	1	1	1	1	2	2
S4 without FD (IO-Link)	1	1	1	1	1	1	1	1
S4 with FD (IO-Link)	1	1	1	1	1	1	1	1

Dimensions in mm

Ordering example:

BNS 819-D02-D16-100-10-FE-S80R

BNS 819-D - - -100-10- - - -

No. of plungers

02 2×
03 3×
04 4×
...

Plunger type

D Chisel
K Ball
R Roller
L Roller bearing
E Chisel with
wiper plate

Plunger spacing

12 12 mm
16 16 mm

optional Function indication

FD 6...60
V AC/DC
FE 90...250
V AC/DC

optional Connector


S80R 5-pin, right
S80L 5-pin, left
S80S 5-pin, right and left
S90R 12-pin, right
S90L 12-pin, left
S90S 12-pin, right and left
S4R-I 4-pin, right
only for IO-Link
S4L-I 4-pin, left
only for IO-Link



Mechanical Multiple Position Switches

Series 100
per DIN 43697

Type	Multiple position switch
Plunger spacing	12 mm or 16 mm
Mounting and function dimensions	per DIN 43697

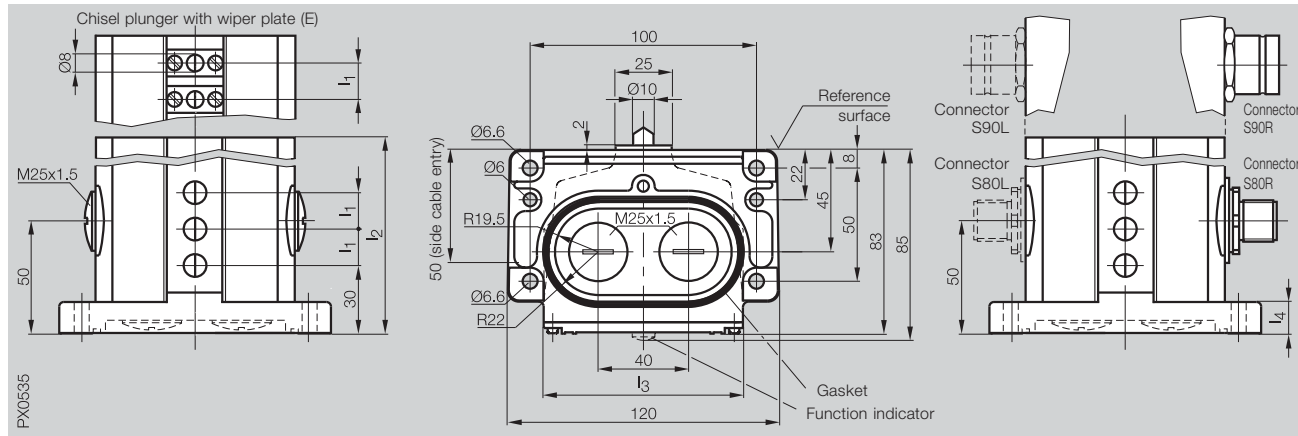

Plunger style	Chisel (D), Ball (K), Roller (R), Roller bearing (L) or Chisel with wiper plate (E)
Plunger material	Stainless steel, contact surfaces induction hardened
Housing material	Cast aluminum, corrosion-resistant, anodized finish
Connection type	M25x1.5 for connector or cable gland
Ambient temperature range	-5...+85 °C
Degree of protection per IEC 60529	IP 67
Function indicator	LED 6...60 V AC/DC (FD) or 90...250 V AC/DC (FE)



For additional information
see IO-Link brochure!


With switch element

BSE 30.0

Ordering code

BNS 819-D - -100-10- - -

Wiring diagram, style




Switch element

Contact material	Silver, gold plated
Switching principle	Snap switch
Contact system	Dual changeover, one normally-open and one normally-closed, galvanically isolated
Electrical data	see page 116
Approval	UL, CSA, CCC

Mechanical data

Plunger point to reference surface	8 mm
Switchpoint to reference surface	6 mm
Maximum plunger travel D, K, R, L	5.5 mm
Maximum plunger travel E	4 mm
Switching actuating force on plunger	min. 20 N
Switching frequency	max. 300/min
Approach speed	Plunger D 40 m/min
	Plunger E 30 m/min
	Plunger K 10 m/min
	Plunger R 60 m/min
	Plunger L 120 m/min
Repeatability	Plunger D, E, K ± 0.002 mm
	Plunger R, L ± 0.01 mm

Installation

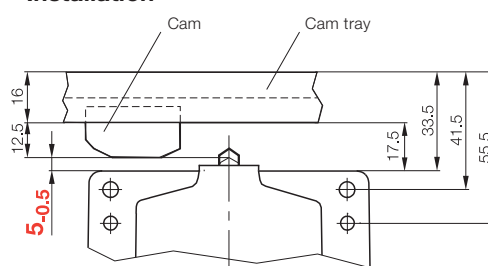

Note!

To ensure switching
function, the dimension
5-0.5 is especially critical.

1.1

Multiple
position
switches
series

100

62

61

72

46

40

Single
Position
Switches
Series

F 60

99

100

5.1

5.2

5.3



Multiple position switches for standard applications

- Dual-chamber system with IP 67 protection: wear-free membrane with hermetic sealing from plunger mechanism and switch chamber
- Maintenance-free, self-lubricating plunger guide with slide bearing

Multiple position switches with wiper plate

- Increased function security under extreme conditions of use
- Wiper plate prevents plunger from sticking in the guide
- For use in wet areas with strongly adhering media


Connection options

- Thread for cable gland M20×1.5 on side and in flange (Gaskets and plugs included)
- Connector (note permissible operating voltage for the connectors, see page 132).

Multiple position switches with function indication

- Function indication for dual voltage range option

Available sizes



Number of plungers	2	3	4	5	6	8	10
Dimension $l_1 = 12$ mm	64	72	84	96	112	130	160
l_2 when $l_1 = 16$ mm	64	84	96	112	130	160	192
Number of connectors							
S80 without FD/FE	1	1	2	2	2		
S80 with FD/FE	1	2	2	3	3		
S90 without FD/FE	1	1	1	1	1	1	1
S90 with FD/FE	1	1	1	1	1	1	2
S4 without FD (IO-Link)	1	1	1	1	1	1	1
S4 with FD (IO-Link)	1	1	1	1	1	1	1

Dimensions in mm

Ordering example:

BNS 819-D04-D12-62-10-FD-S80R

BNS 819-D - - -62-10- - - -

No. of plungers

02 2×
03 3×
04 4×
...

Plunger type

D Chisel
K Ball
R Roller
L Roller bearing
E Chisel with wiper plate

Plunger spacing

12 12 mm
16 16 mm

optional Function indication


FD 6...60 V AC/DC
FE 90...250 V AC/DC

optional Connector

S80R 5-pin, right
S80L 5-pin, left
S80S 5-pin, right and left
S90R 12-pin, right
S90L 12-pin, left
S90S 12-pin, right and left
S4R-I 4-pin, right only for IO-Link
S4L-I 4-pin, left only for IO-Link



Type	Multiple position switch
Plunger spacing	12 mm or 16 mm

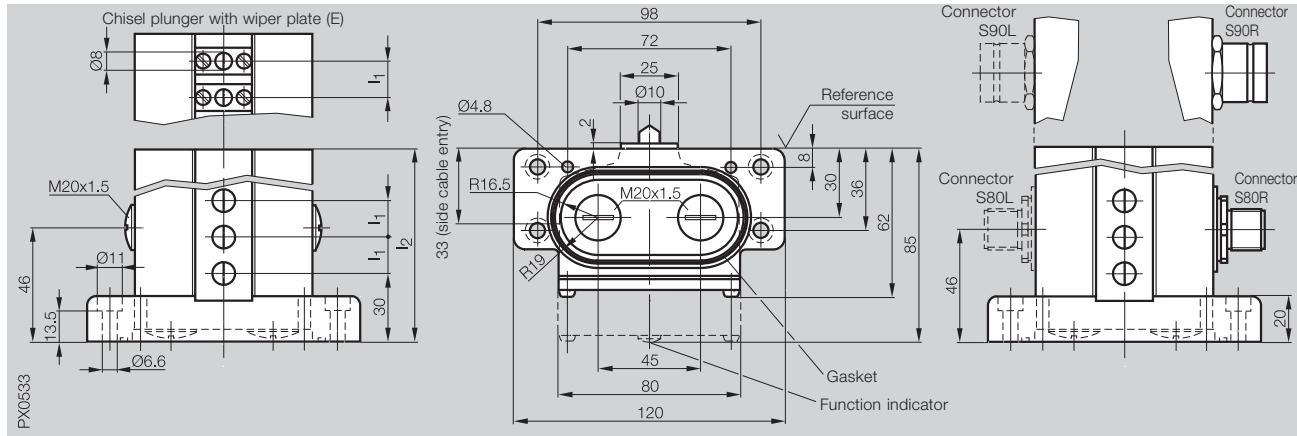

Plunger style	Chisel (D), Ball (K), Roller (R), Roller bearing (L) or Chisel with wiper plate (E)
Plunger material	Stainless steel, contact surfaces induction hardened
Housing material	Cast aluminum, corrosion-resistant, anodized finish
Connection type	M20x1.5 for connector or cable gland
Ambient temperature range	-5...+85 °C
Degree of protection per IEC 60529	IP 67
Function indicator	LED 6...60 V AC/DC (FD) or 90...250 V AC/DC (FE)



For additional information
see IO-Link brochure!


With switch element

Ordering code

Wiring diagram, style

BSE 30.0

BNS 819-D - - -62-10- - -




Switch element

Contact material	Silver, gold plated
Switching principle	Snap switch
Contact system	Dual changeover, one normally-open and one normally-closed, galvanically isolated
Electrical data	see page 116
Approval	UL, CSA, CCC

Mechanical data

Plunger point to reference surface	8 mm
Switchpoint to reference surface	6 mm
Maximum plunger travel D, K, R, L	5.5 mm
Maximum plunger travel E	4 mm
Switching actuating force on plunger	min. 20 N
Switching frequency	max. 300/min
Approach speed	Plunger D 40 m/min Plunger E 30 m/min Plunger K 10 m/min Plunger R 60 m/min Plunger L 120 m/min
Repeatability	Plunger D, E, K ± 0.002 mm Plunger R, L ± 0.01 mm

Installation

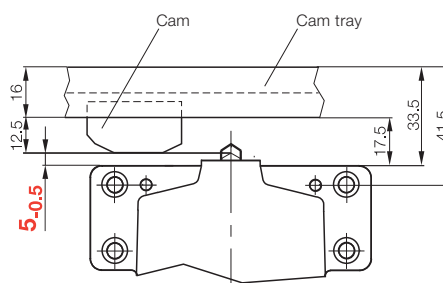

Note!
To ensure switching
function, the dimension
5-0.5 is especially critical.



Multiple position switches for standard applications

- Dual-chamber system with IP 67 protection: wear-free membrane with hermetic sealing from plunger mechanism and switch chamber
- Maintenance-free, self-lubricating plunger guide with slide bearing

Multiple position switches with wiper plate

- Increased function security under extreme conditions of use
- Wiper plate prevents plunger from sticking in the guide
- For use in wet areas with strongly adhering media

Connection options

- Thread for cable gland M20×1.5 on side and in flange (Gaskets and plugs included)
- Connector (note permissible operating voltage for the connectors, see page 132).


Multiple position switches with function indication

- Function indication for dual voltage range option

Available sizes

No. of plungers	Plunger spacing	Housing B Standard	Housing B	Housing C	Number of connectors S80 without FD/FE	Number of connectors S80 with FD/FE	Number of connectors S90 without FD/FE	Number of connectors S90 with FD/FE	Number of connectors S4 without FD (IO-Link)	Number of connectors S4 with FD (IO-Link)
	Dimension l ₁	Dimension l ₂ l ₃	Dimension l ₂ l ₃	Dimension l ₂ l ₃						
2	12	36 12	60 30	48 24	1	1	1	1	1	1
3	12	48 12	60 24	60 24	1	2	1	1	1	1
4	12	60 12			2	2	1	1	1	1
5	12	72 12			2	3	1	1	1	1
6	12	84 12			2	3	1	1	1	1
2	16	48 16	60 30	60 30	1	1	1	1	1	1
3	16	72 16			1	2	1	1	1	1
4	16	84 16			2	2	1	1	1	1

Dimensions in mm



Ordering example:

BNS 819-B04-D12-61-12-10-FD-S80R

BNS 819- - - **-61-** - **-10-** - -


Housing style	No. of plungers	Plunger type	Plunger spacing	Distance l ₃	optional Function indication	optional Connector
B Standard	02 2x	D Chisel	12 12 mm	12 12 mm	FD 6...60	
2x M20×1.5 on side	03 3x	K Ball	16 16 mm	16 16 mm	FE V AC/DC	
B 3x M20×1.5 on side and in flange	04 4x	R Roller		24 24 mm		
C 2x M20×1.5 on side and cable entry in flange	...	L Roller bearing		30 30 mm		
		E Chisel with wiper plate				



Mechanical Multiple Position Switches

Series 61

Type	Multiple position switch
Plunger spacing	12 mm or 16 mm

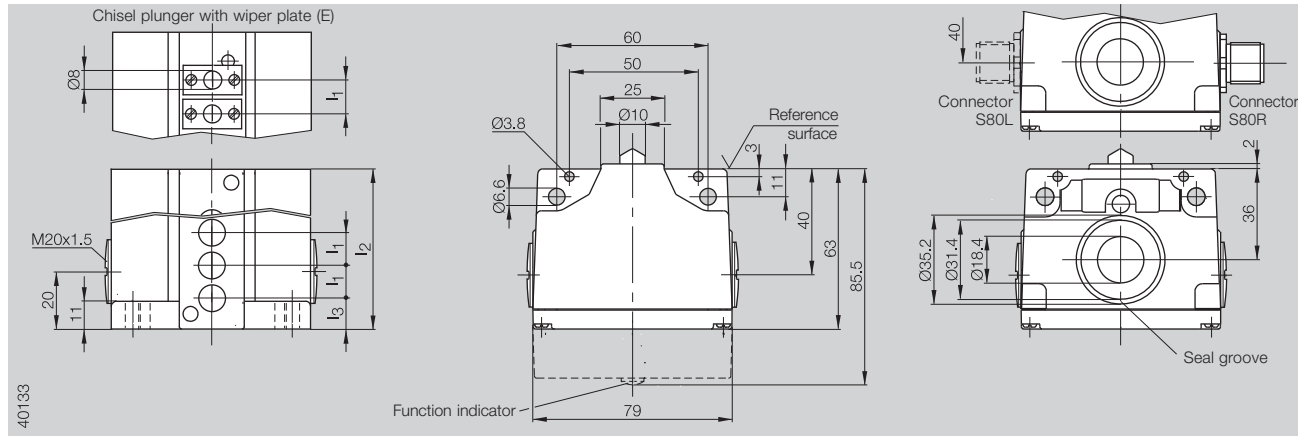

Plunger style	Chisel (D), Ball (K), Roller (R), Roller bearing (L) or Chisel with wiper plate (E)
Plunger material	Stainless steel, contact surfaces induction hardened
Housing material	Cast aluminum, corrosion-resistant, anodized finish
Connection type	M20x1.5 for connector or cable gland
Ambient temperature range	-5...+85 °C
Degree of protection per IEC 60529	IP 67
Function indicator	LED 6...60 V AC/DC (FD) or 90...250 V AC/DC (FE)



IO-Link

For additional information
see IO-Link brochure!


With switch element

BSE 30.0

Ordering code

BNS 819- - -61- -10- -

Wiring diagram, style




Switch element

Contact material	Silver, gold plated
Switching principle	Snap switch
Contact system	Dual changeover, one normally-open and one normally-closed, galvanically isolated
Electrical data	see page 116
Approval	UL, CSA, CCC

Mechanical data

Plunger point to reference surface	8 mm
Switchpoint to reference surface	6 mm
Maximum plunger travel D, K, R, L	5.5 mm
Maximum plunger travel E	4 mm
Switching actuating force on plunger	min. 20 N
Switching frequency	max. 300/min
Approach speed	Plunger D 40 m/min Plunger E 30 m/min Plunger K 10 m/min Plunger R 60 m/min Plunger L 120 m/min
Repeatability	Plunger D, E, K ± 0.002 mm Plunger R, L ± 0.01 mm

Installation

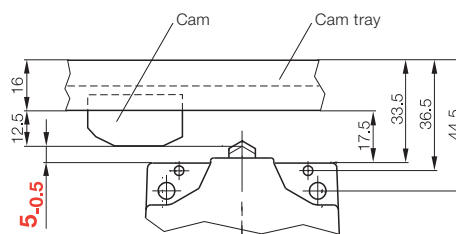

Note!

To ensure switching
function, the dimension
5.0.5 is especially critical.



1.1

**Multiple
position
switches
series**

100
62
61
72
46
40

Single
Position
Switches
Series
F 60
99
100

5.1

5.2

5.3



Multiple position switches for standard applications

- Dual-chamber system with IP 67 protection: wear-free membrane with hermetic sealing from plunger mechanism and switch chamber
- Maintenance-free, self-lubricating plunger guide with slide bearing

Multiple position switches with wiper plate

- Increased function security under extreme conditions of use
- Wiper plate prevents plunger from sticking in the guide
- For use in wet areas with strongly adhering media


Connection options

- Thread for cable gland M25×1.5 on side and in flange (Gaskets and plugs included)
- Connector (note permissible operating voltage for the connectors, see page 132).

Multiple position switches with function indication

- Function indication for dual voltage range option

Available sizes



Number of plungers	2	3	4	5	6	8	10
Dimension l_2 when $l_1 = 12$ mm	84	84	100	116	132	164	180
Dimension l_3 when $l_1 = 12$ mm	66	66	82	98	114	146	162
Dimension l_4 when $l_1 = 12$ mm	54	54	68	84	100	132	148
Dimension l_2 when $l_1 = 16$ mm	84	100	116	132	148	180	212
Dimension l_3 when $l_1 = 16$ mm	66	82	98	114	130	162	194
Dimension l_4 when $l_1 = 16$ mm	54	68	84	100	116	148	180
Number of connectors							
S80 without FD/FE	1	1	2	2	2		
S80 with FD/FE	1	2	2	3	3		
S90 without FD/FE	1	1	1	1	1	1	2
S90 with FD/FE	1	1	1	1	1	2	2

Dimensions in mm

Ordering example:

BNS 819-B04-D12-72-10-FD-S80R

BNS 819-B - - -72-10- - - -

No. of plungers

02 2×
03 3×
04 4×
...

Plunger style

D Chisel
K Ball
R Roller
L Roller bearing
E Chisel with wiper plate

Plunger spacing

12 12 mm
16 16 mm

optional Function indication

FD 6...60 V AC/DC
FE 90...250 V AC/DC


optional Connector

S80R 5-pin, right
S80L 5-pin, left
S80S 5-pin, right and left
S90R 12-pin, right
S90L 12-pin, left
S90S 12-pin, right and left




**Not for new applications.
Still available for replacements.**

Type	Multiple position switch
Plunger spacing	12 mm or 16 mm

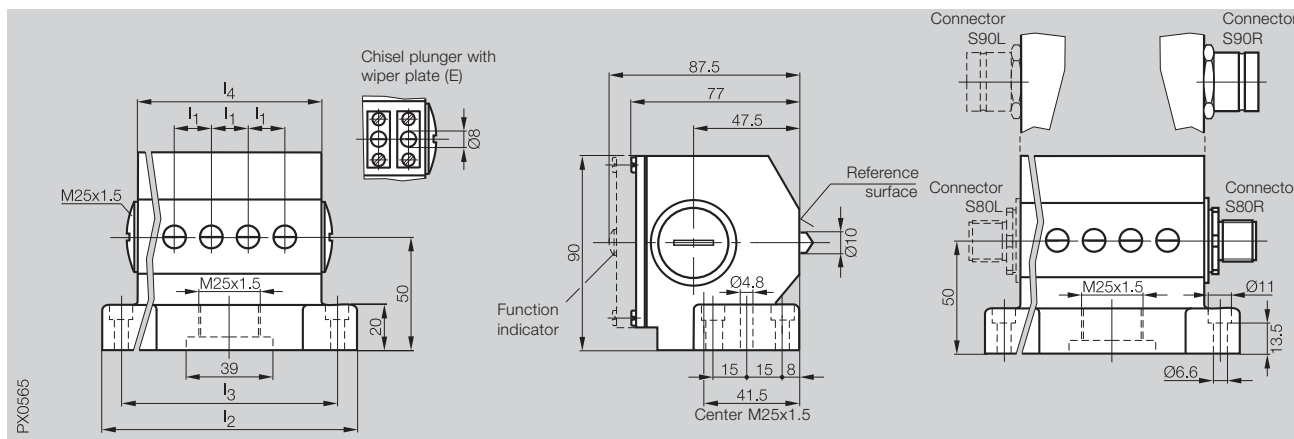

Plunger style	Chisel (D) , Ball (K) , Roller (R) , Roller bearing (L) or Chisel with wiper plate (E)
Plunger material	Stainless steel, contact surfaces induction hardened
Housing material	Cast aluminum, corrosion-resistant, anodized finish
Connection type	M25×1.5 for connector or cable gland
Ambient temperature range	−5...+85 °C
Degree of protection per IEC 60529	IP 67
Function indicator	LED 6...60 V AC/DC (FD) or 90...250 V AC/DC (FE)

With switch element	BSE 30.0
Ordering code	BNS 819-B _ _ _ -72-10- _ _ _ _
Wiring diagram, style	




Switch element	
Contact material	Silver, gold plated
Switching principle	Snap switch
Contact system	Dual changeover, one normally-open and one normally-closed, galvanically isolated
Electrical data	see page 116
Approval	UL, CSA, CCC

Mechanical data		
Plunger point to reference surface		6 mm
Switchpoint to reference surface		4 mm
Maximum plunger travel D, K, R, L		5.5 mm
Maximum plunger travel E		4 mm
Switching actuating force on plunger		min. 20 N
Switching frequency		max. 300/min
Approach speed	Plunger D	40 m/min
	Plunger E	30 m/min
	Plunger K	10 m/min
	Plunger R	60 m/min
	Plunger L	120 m/min
Repeatability	Plunger D, E, K	± 0.002 mm
	Plunger R, L	± 0.01 mm



Installation

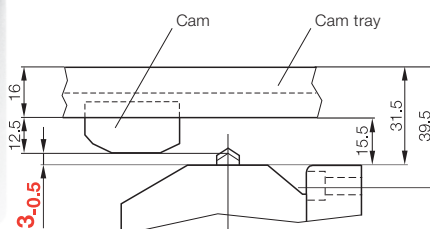

Note!
To ensure switching function, the dimension 3-0.5 is especially critical.



Multiple position switches for standard applications

- Smallest plunger spacing for mechanical multiple position switches (8 mm or 10 mm)
- Dual-chamber system with IP 67 protection: wear-free membrane with hermetic sealing from plunger mechanism and switch chamber
- Maintenance-free, self-lubricating plunger guide with slide bearing

Multiple position switches with wiper plate


- Increased function security under extreme conditions of use
- Wiper plate prevents plunger from sticking in the guide
- For use in wet areas with strongly adhering media

Connection options

- Thread for cable gland M16×1.5 on side and in flange (Scope of delivery: Seals and cover screws)
- Connector (note permissible operating voltage for the connectors, see page 132).

Switching elements for low-current applications

Snap switch elements BSE 73.1 or BSE 74.1 have specially formed gold contacts making them suitable for low currents ≥ 10 mA.



Available sizes

Number of plungers	2	3	4	5	6	8	10
Dimension $l_1 = 8$ mm	49	59	64	72	80	96	112
l_2 when $l_1 = 10$ mm	49	59	72	80	89	112	129
Number of connectors							
S80 without FC	1	1	2	2	2		
S80 with FC	1	2	2	3	3		
S4 without FC (IO-Link)	1	1	1	1	1	1	1
S4 with FC (IO-Link)	1	1	1	1	1	1	1

Dimensions in mm

Size 12× with 8 mm spacing on request.

Ordering example:

BNS 819-B04-D08-46-11-FC-S80R

BNS 819-B - -46-1 - -

No. of plungers

02 2×
03 3×
04 4×
...

Plunger style

D Chisel
K Ball
R Roller
E Chisel with wiper plate

Plunger spacing

08 8 mm
10 10 mm

Switch elements

0 BSE 69.1
1 BSE 70.1
2 BSE 73.1
3 BSE 74.1

optional Function indication

FC 24...28 V DC


optional Connector

S80R 5-pin, right
S80L 5-pin, left
S80S 5-pin, right and left
S4R-I 4-pin, right only for IO-Link
S4L-I 4-pin, left only for IO-Link

Only with BSE 69.1 or BSE 73.1.



Type	Multiple position switch
Plunger spacing	8 mm or 10 mm

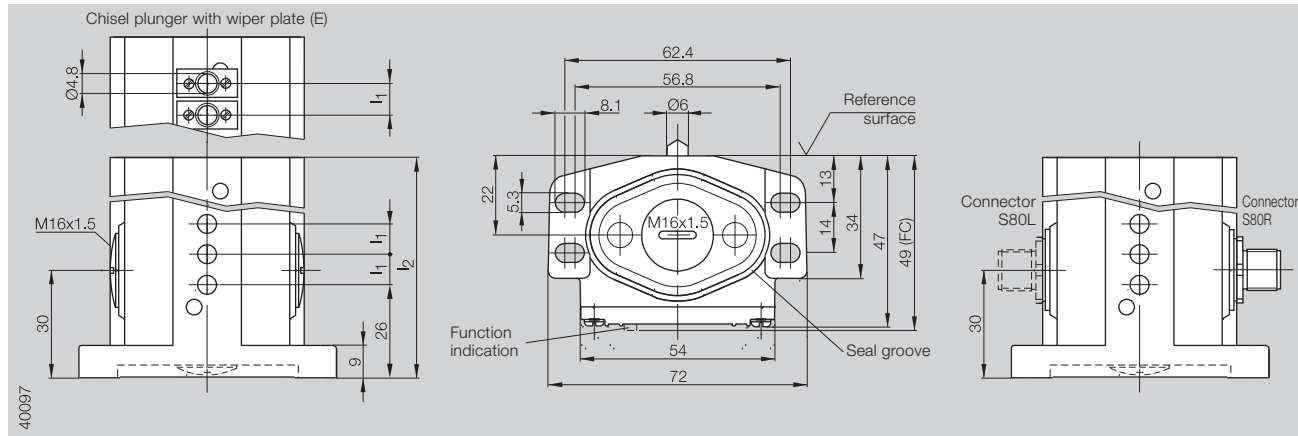

Plunger style	Chisel (D), Ball (K), Roller (R) or Chisel with wiper plate (E)
Plunger material	Stainless steel, contact surfaces induction hardened
Housing material	Cast aluminum, corrosion-resistant, anodized finish
Connection type	M16x1.5 for cable gland or connector
Ambient temperature range	-5...+85 °C
Degree of protection per IEC 60529	IP 67
Function indicator	LED 24...28 V DC (FC)

With switch element	BSE 69.1	BSE 73.1	BSE 70.1	BSE 74.1
Ordering code	BNS 819-...-46-10	BNS 819-...-46-12	BNS 819-...-46-11	BNS 819-...-46-13
Wiring diagram, style				

Switch element

Contact material	Silver	Gold	Silver	Gold
Switching principle	Snap switch		Snap switch	
Contact system	Single-pole changeover		Single-pole changeover	
Connection type	Solder connection		Screw terminal	
Electrical data	see page 117		see page 117	
Approval	UL, CSA, CCC		UL, CSA, CCC	


Mechanical data

Plunger point to reference surface	4 mm	4 mm
Switchpoint to reference surface	3.5 mm	3.5 mm
Maximum plunger travel	3.5 mm	3.5 mm
Switching actuating force on plunger	min. 8 N	min. 8 N
Switching frequency	max. 200/min	max. 200/min
Approach speed	Plunger D 20 m/min Plunger E 10 m/min Plunger K 9 m/min Plunger R 60 m/min	Plunger D 20 m/min Plunger E 10 m/min Plunger K 9 m/min Plunger R 60 m/min
Repeatability	Plunger D, E ±0.02 mm Plunger K ±0.03 mm Plunger R ±0.05 mm	Plunger D, E ±0.02 mm Plunger K ±0.03 mm Plunger R ±0.05 mm



For additional information see IO-Link brochure!

Installation

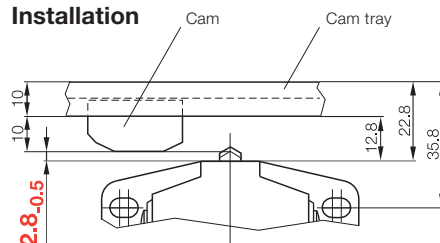

Note!

To ensure switching function, the dimension 2.8_{-0.5} is especially critical.



Multiple position switches for standard applications

- Smallest plunger spacing for electromechanical multiple position switches (8 mm)
- Dual-chamber system with IP 67 protection: wear-free membrane with hermetic sealing from plunger mechanism and switch chamber
- Maintenance-free, self-lubricating plunger guide with slide bearing

Multiple position switches with wiper plate


- Increased function security under extreme conditions of use
- Wiper plate prevents plunger from sticking in the guide
- For use in wet areas with strongly adhering media

Connection options

- Thread for cable gland M16×1.5 on side (Scope of delivery: Seals and cover screws)
- Connector (note permissible operating voltage for the connectors, see page 132).

Switching elements for low-current applications

Snap switch elements BSE 73.1 or BSE 74.1 have specially formed gold contacts making them suitable for low currents ≥ 10 mA.



Available sizes

Number of plungers	2	3	4	5	6
Dimension L ₁	34	42	50	58	66
Number of connectors	1	1	2	2	2
S80 without FC	1	1	2	2	2
S80 with FC	1	2	2		
S4 without FC (IO-Link)	1	1	1	1	1
S4 with FC (IO-Link)	1	1	1	1	1

Dimensions in mm


Ordering example:

BNS 819-B04-D08-40-10-FC-S80R

BNS 819-B - -40-1 - -


No. of plungers	Plunger style	Plunger spacing	Switch elements	optional Function indication	optional Connector
02 2×	D Chisel	08 8 mm	0 BSE 69.1	FC 24...28 V DC	S80R 5-pin, right
03 3×	K Ball		1 BSE 70.1		S80L 5-pin, left
04 4×	R Roller		2 BSE 73.1		S80S 5-pin, right and left
...	E Chisel with wiper plate		3 BSE 74.1		S4R-I 4-pin, right only for IO-Link
					S4L-I 4-pin, left only for IO-Link

Only with BSE 69.1 or BSE 73.1.


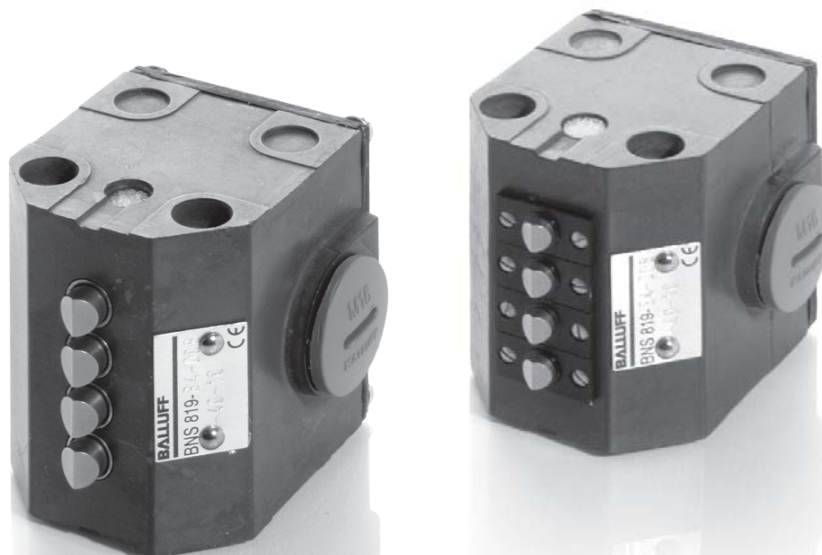


Type	Multiple position switch
Plunger spacing	8 mm

Chisel plunger with wiper plate (E)





PX0432

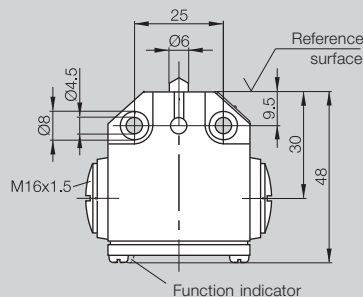

Plunger style	Chisel (D), Ball (K), Roller (R) or Chisel with wiper plate (E)
Plunger material	Stainless steel, contact surfaces induction hardened
Housing material	Cast aluminum, corrosion-resistant, anodized finish
Connection type	M16x1.5 for cable gland or connector
Ambient temperature range	-5...+85 °C
Degree of protection per IEC 60529	IP 67
Function indicator	LED 24...28 V DC (FC)

With switch element	BSE 69.1	BSE 73.1	BSE 70.1	BSE 74.1
Ordering code	BNS 819-...-40-10	BNS 819-...-40-12	BNS 819-...-40-11	BNS 819-...-40-13
Wiring diagram, style				



Switch element				
Contact material	Silver	Gold	Silver	Gold
Switching principle	Snap switch		Snap switch	
Contact system	Single-pole changeover		Single-pole changeover	
Connection type	Solder connection		Screw terminal	
Electrical data	see page 117		see page 117	
Approval	UL, CSA, CCC		UL, CSA, CCC	


Mechanical data				
Plunger point to reference surface	4 mm		4 mm	
Switchpoint to reference surface	3.5 mm		3.5 mm	
Maximum plunger travel	3.5 mm		3.5 mm	
Switching actuating force on plunger	min. 8 N		min. 8 N	
Switching frequency	max. 200/min		max. 200/min	
Approach speed	Plunger D 20 m/min Plunger E 10 m/min Plunger K 9 m/min Plunger R 60 m/min		Plunger D 20 m/min Plunger E 10 m/min Plunger K 9 m/min Plunger R 60 m/min	
Repeatability	Plunger D, E ±0.02 mm Plunger K ±0.03 mm Plunger R ±0.05 mm		Plunger D, E ±0.02 mm Plunger K ±0.03 mm Plunger R ±0.05 mm	



IO-Link

For additional information see IO-Link brochure!

Installation

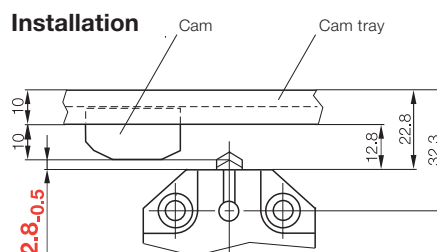

Note!
To ensure switching function, the dimension 2.8-0.5 is especially critical.

1.1

Multiple position switches series

100
62
61
72
46
40
Single Position Switches Series
F 60
99
100

5.1

5.2

5.3



Single position switches per DIN 43693 for standard applications

- Dual-chamber system with IP 67 protection: wear-free membrane with hermetic sealing from plunger mechanism and switch chamber
- Maintenance-free, self-lubricating plunger guide with slide bearing
- Plunger can be rotated in two approach directions

Single position switch with wiper plate

- Increased function security under extreme conditions of use
- Wiper plate prevents plunger from sticking in the guide
- For use in wet areas with strongly adhering media

Connection options


- Thread for cable gland M16×1.5 (Scope of delivery: Seals and cover screws)
- Connector (note permissible operating voltage for the connectors, see page 132).

Single position switch with function indicator

- Function indication for dual voltage range option

Approach from two directions possible (parallel and diagonally)

Press plunger down and turn to desired direction; release plunger.

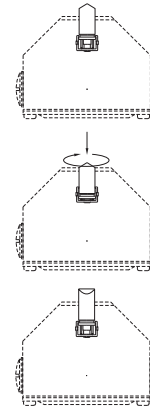

Ordering example:

BNS 819-FD-60-101-FE-S80R

BNS 819-F-60-101-

Plunger style

- D** Chisel
- K** Ball
- R** Roller
- L** Roller bearing
- E** Chisel with wiper plate

optional Function indication

- FD** 6...60 V AC/DC
- FE** 90...250 V AC/DC

optional Connector

- S80R** 5-pin, right
- S80L** 5-pin, left




Mechanical Single Position Switches

Series F 60
per DIN 43693

Type
Mounting and function dimensions

Single position switch
per DIN 43693

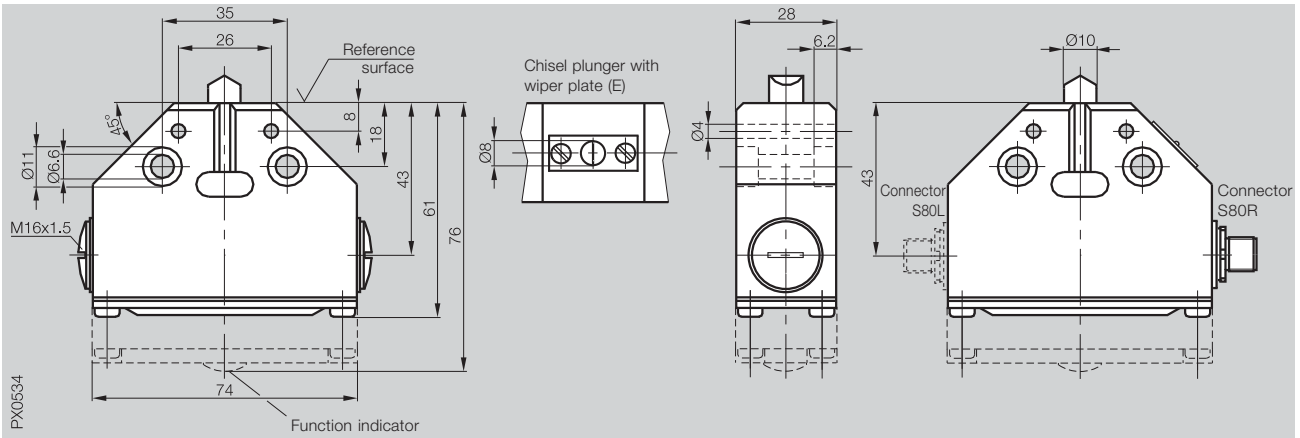

Plunger style	Chisel (D), Ball (K), Roller (R), Roller bearing (L) or Chisel with wiper plate (E)
Plunger material	Stainless steel, contact surfaces induction hardened
Housing material	Cast aluminum, corrosion-resistant, anodized finish
Connection type	M16x1.5 for cable gland or connector
Ambient temperature range	-5...+85 °C
Degree of protection per IEC 60529	IP 67
Function indicator	LED 6...60 V AC/DC (FD) or 90...250 V AC/DC (FE)


With switch element

BSE 30.0

Ordering code

BNS 819-F -60-**101**- - - - -

Wiring diagram, style



Switch element


Contact material	Silver, gold plated
Switching principle	Snap switch
Contact system	Dual changeover, one normally-open and one normally-closed, galvanically isolated
Electrical data	see page 116
Approval	UL, CSA, CCC

Mechanical data

Plunger point to reference surface	8 mm
Switchpoint to reference surface	6 mm
Maximum plunger travel D, K, R, L	7.5 mm
Maximum plunger travel E	4 mm
Switching actuating force on plunger	min. 20 N
Switching frequency	max. 300/min
Approach speed	Plunger D 40 m/min Plunger E 30 m/min Plunger K 10 m/min Plunger R 60 m/min Plunger L 120 m/min
Repeatability	Plunger D, E, K ± 0.002 mm Plunger R, L ± 0.01 mm



Installation

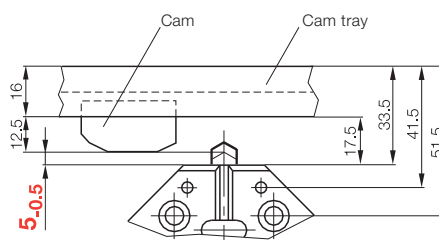

Note!
To ensure switching function, the dimension 5_{-0.5} is especially critical.

1.1

Multiple position switches series

100
62
61
72
46
40


Single position switches series

F 60
99
100

5.1

5.2

5.3



Single position switches for standard applications

- Dual-chamber system with IP 67 protection: wear-free membrane with hermetic sealing from plunger mechanism and switch chamber
- Maintenance-free, self-lubricating plunger guide with slide bearing
- Plunger can be rotated in two approach directions

Single position switch with wiper plate

- Increased function security under extreme conditions of use
- Wiper plate prevents plunger from sticking in the guide
- For use in wet areas with strongly adhering media

Switching elements for low-current applications


Snap switch elements BSE 73.1 or BSE 74.1 have specially formed gold contacts making them suitable for low currents ≥ 10 mA.

Connection variants

- Thread for cable gland M12×1.5 for series 99, Thread for cable gland M16×1.5 for series 100
- Connector (note permissible operating voltage for the connectors, see page 132).

Approach from two directions possible (parallel and diagonally)

Press plunger down and turn to desired direction; release plunger.




Ordering example:

BNS 819-100-E-12-FC-S80

BNS 819-

Series	Plunger style	Switch elements	optional Function indication	optional Connector
99 Series 99	D Chisel	0 BSE 69.1	FC 24...28 V DC	S80 5-pin
100 Series 100	K Ball	1 BSE 70.1		
	R Roller	2 BSE 73.1		
	E Chisel with wiper plate	3 BSE 74.1		Only with BSE 69.1 or BSE 73.1.



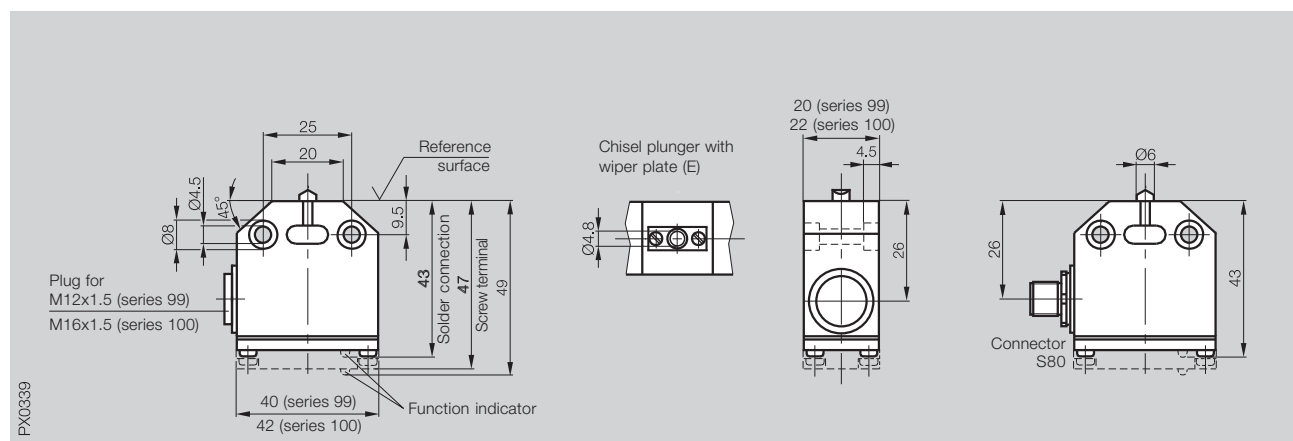

Plunger style	Chisel (D), Ball (K), Roller (R) or Chisel with wiper plate (E)
Plunger material	Stainless steel, contact surfaces induction hardened
Housing material	Cast aluminum, corrosion-resistant, anodized finish
Connection type	Cable gland (M12×1.5 series 99, M16×1.5 series 100) or connector
Ambient temperature range	-5...+85 °C
Degree of protection per IEC 60529	IP 67
Function indicator	LED 24...28 V DC (FC)


With switch element	BSE 69.1	BSE 73.1	BSE 70.1	BSE 74.1
Ordering code	BNS 819-99/100_-10	BNS 819-99/100_-12	BNS 819-99/100_-11	BNS 819-99/100_-13
Wiring diagram, style				



Switch element	Silver	Gold	Silver	Gold
Contact material	Silver	Gold	Silver	Gold
Switching principle	Snap switch		Snap switch	
Contact system	Single-pole changeover		Single-pole changeover	
Connection type	Solder connection		Screw terminal	
Electrical data	see page 117		see page 117	
Approval	UL, CSA, CCC		UL, CSA, CCC	

Mechanical data			
Plunger point to reference surface		4 mm	4 mm
Switchpoint to reference surface		3.5 mm	3.5 mm
Maximum plunger travel		3.5 mm	3.5 mm
Switching actuating force on plunger		min. 8 N	min. 8 N
Switching frequency		max. 200/min	max. 200/min
Approach speed	Plunger D	20 m/min	20 m/min
	Plunger E	10 m/min	10 m/min
	Plunger K	9 m/min	9 m/min
	Plunger R	60 m/min	60 m/min
Repeatability	Plunger D, E	± 0.02 mm	± 0.02 mm
	Plunger K	±0.03 mm	±0.03 mm
	Plunger R	±0.05 mm	±0.05 mm


Installation

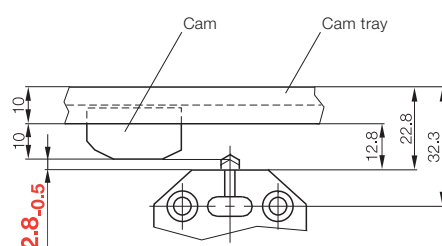

Note!

To ensure switching function, the dimension 2.8-0.5 is especially critical.



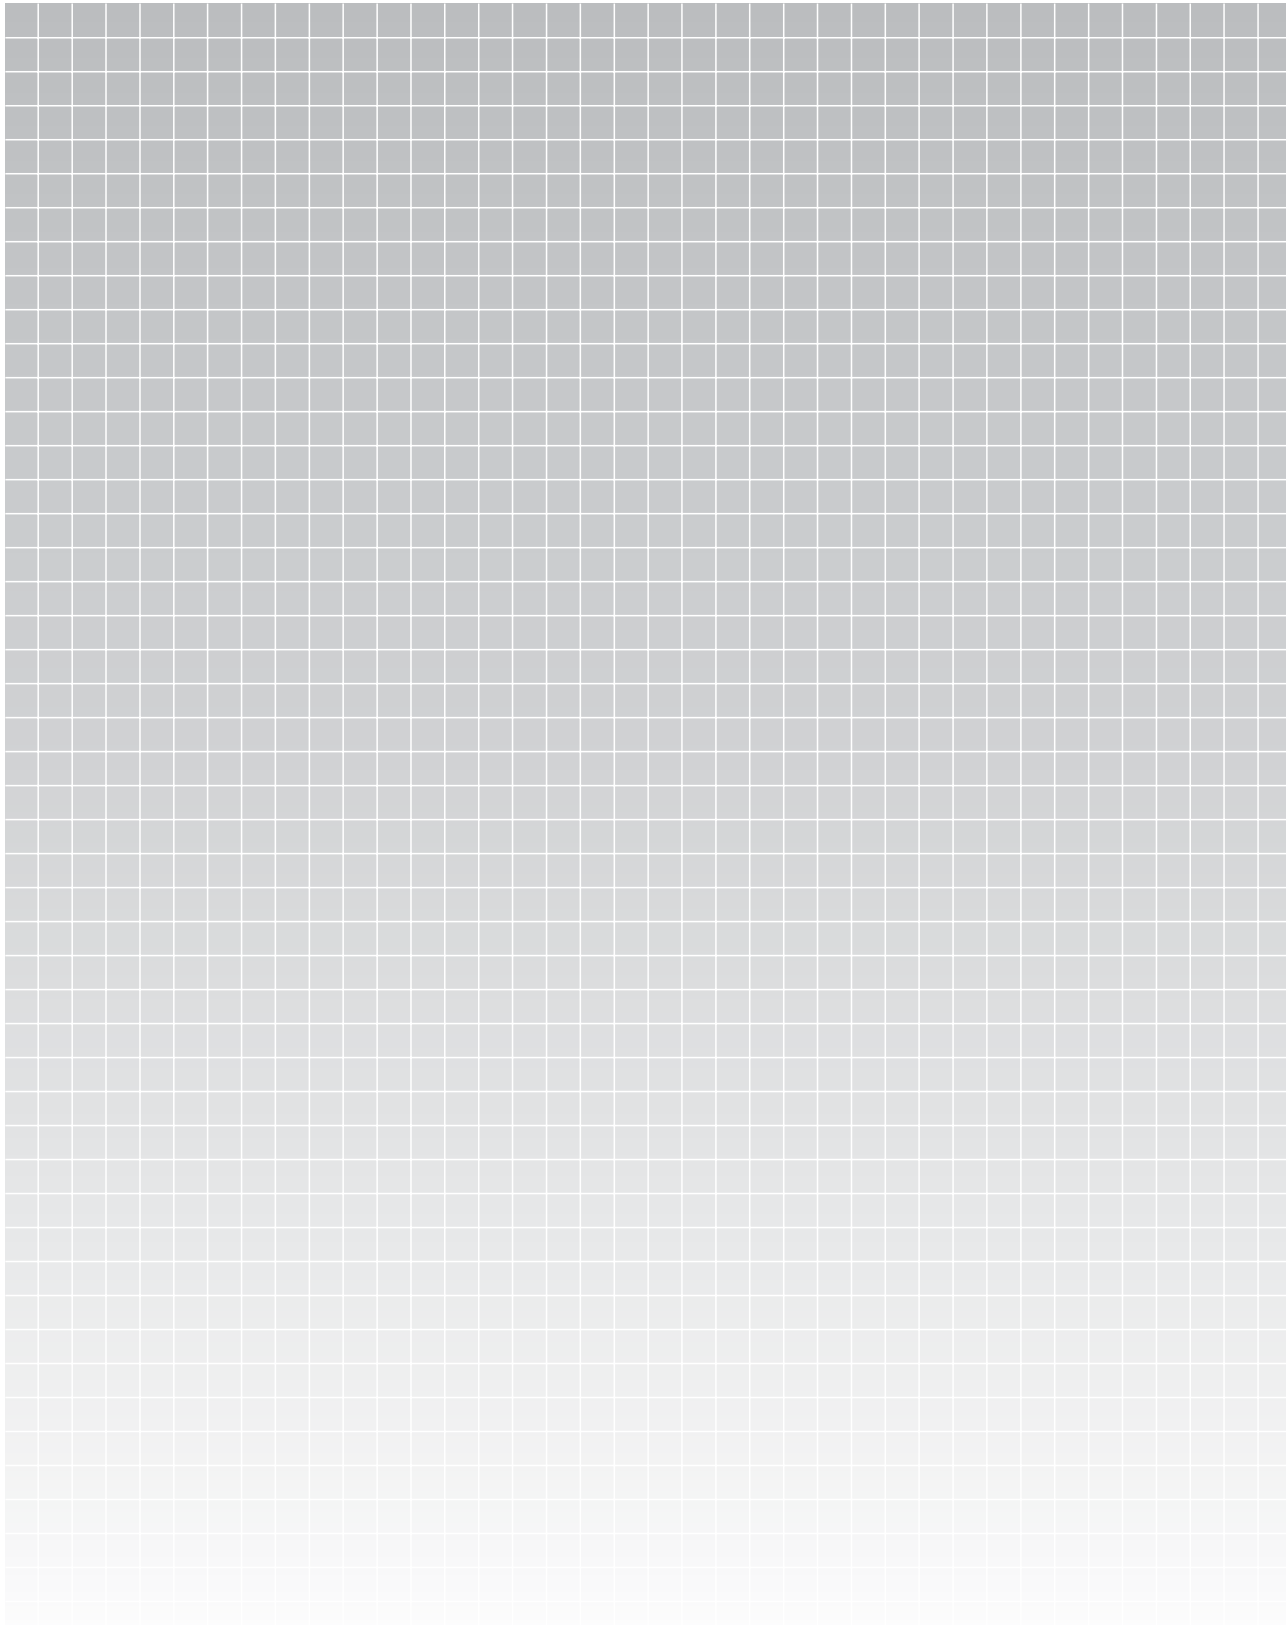


DIN EN 60204-1 VDE 0113



more added value

- Long service life
- Positive-opening contacts for increased security

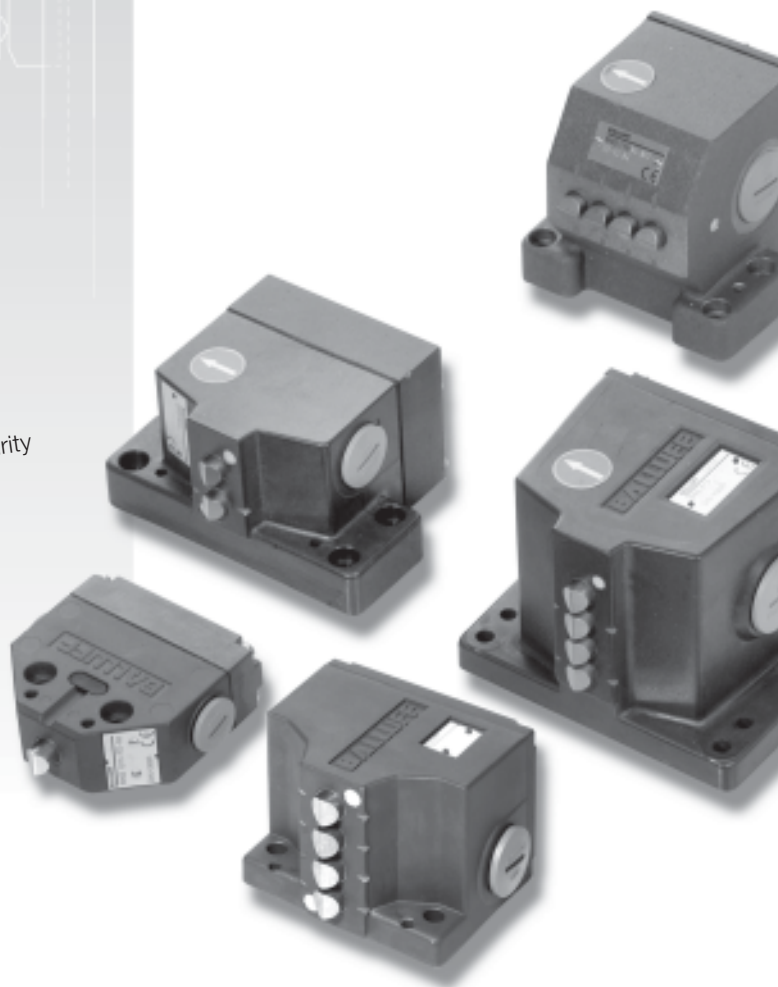

Mechanical multiple position switches with safety switch positions

48	Series 100 per DIN 43697
50	Series 62
52	Series 61
54	Series 72

Mechanical single position switches with safety switch position

56	Series F 60 per DIN 43693
----	------------------------------

1.2

Multiple
position
switches
series
100
62
61
72

Single
position
switches
series
F 60

5.1

5.2

5.3



Multiple position switches per DIN 43697 with safety switch positions per DIN EN 60204-1/ VDE 0113

- Positive-opening contacts and rigid plungers for additional security per DIN EN 60204-1/VDE 0113
- Dual-chamber system with IP 67 protection: wear-free membrane with hermetic sealing from plunger mechanism and switch chamber

- Maintenance-free, self-lubricating plunger guide with slide bearing

Multiple position switches with function indicator

- Function indication for selectable three voltage ranges


Multiple position switches with wiper plate

- Increased function security under extreme conditions of use
- Wiper plate prevents plunger from sticking in the guide
- For use in wet areas with strongly adhering media

Connection options

- Thread for cable gland M25×1.5 on side and in flange (Gaskets and plugs included)
- Connector (note permissible operating voltage for the connectors, see page 132).

Available sizes



Number of plungers		2	3	4	5	6	8	10	12
Dimension l ₁ = 12 mm	Dimension l ₃	70	80	90	105	120	140	170	200
l ₂ when	Dimension l ₃	88	88	88	88	88	80	80	80
	Dimension l ₄	14	14	14	14	14	20	20	20
Dimension l ₁ = 16 mm	Dimension l ₃	70	90	105	120	140	170	200	240
	Dimension l ₃	88	88	88	88	80	80	80	80
	Dimension l ₄	14	14	14	14	20	20	20	20
Number of connectors*	S80 without FD/FE	1	1	2	2	2			
	S80 with FD/FE	1	2	2	3	3			
	S90 without FD/FE	1	1	1	1	1	1	1	2
	S90 with FD/FE	1	1	1	1	1	1	2	2

Dimensions in mm

*Number of connectors BSE 85 on request.

Ordering example:

BNS 813-D04-D12-100-20-03-FE-S80R


BNS 813-D - - -100- - - -

No. of plungers	Plunger style	Plunger spacing	Switch elements	Safety switch elements	optional Function indication	optional Connector
02 2×	D Chisel	12 12 mm	10 BSE 61	No. from flange	FD 6...60 V AC/DC (for BSE 30.0 and BSE 61)	S80R 5-pin, right
03 3×	K Ball	16 16 mm	positions BSE 30.0			S80L 5-pin, left
04 4×	R Roller		12 only BSE 61		FE 90...250 V AC/DC (for BSE 30.0 and BSE 61)	S80S 5-pin, right and left
...	L Roller bearing		20 BSE 85	positions BSE 30.0	FC 24...28 V DC (only for BSE 85)	S90R 12-pin, right
	E Chisel with wiper plate		22 only BSE 85			S90L 12-pin, left
						S90S 12-pin, right and left

Mechanical Multiple Position Switches with Safety Switch Positions

Series 100
per DIN 43697

Type	Multiple position switch with positive-opening contacts
Plunger spacing	12 mm or 16 mm
Mounting and function dimensions	per DIN 43697

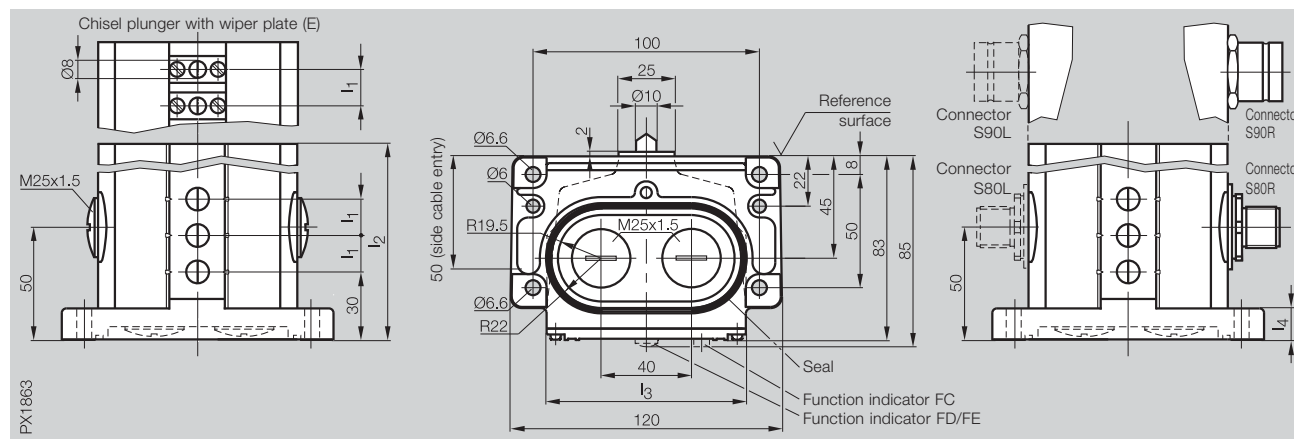

Plunger style	Chisel (D), Ball (K), Roller (R), Roller bearing (L) or Chisel with wiper plate (E)
Plunger material	Stainless steel, contact surfaces induction hardened
Housing material	Cast aluminum, corrosion-resistant, anodized finish
Connection type	M25x1.5 for connector or cable gland
Ambient temperature range	-5...+85 °C
Degree of protection per IEC 60529	IP 67
Function indicator	LED 6...60 V AC/DC (FD), 90...250 V AC/DC (FE) or 24...28 V DC (FC)

With switch element

	BSE 61 per DIN EN 60204-1/VDE 0113	BSE 85 per DIN EN 60204-1/VDE 0113	BSE 30.0
Ordering code	BNS 813-D - -100-1 - -	BNS 813-D - -100-2 - -	BNS 813-D - -100-0 - -
Wiring diagram, style			


Switch element

Contact material	Silver	Silver	Silver, gold plated
Switching principle	Creep switch, Positive-opening	Snap switch, positive opening (normally-closed)	Snap switch
Contact system	Normally-closed, double interruption	Dual-changeover: 1. NO (snap function), 2. Positive-opening (double-interruption), all galvanically isolated	dual changeover, one normally-open and one normally-closed, galvanically isolated
Electrical data	see page 116	see page 116	see page 116
Approval	CSA, CCC	cULus, CSA, CCC	UL, CSA, CCC

Mechanical data

Plunger point to reference surface	8 mm	8 mm	8 mm
Switchpoint to reference surface	7 mm	6.5 mm	6 mm
Maximum plunger travel	4 mm	4 mm	5.5 mm
Assured opening after plunger travel	2.5 mm	2.5 mm	min. 20 N
Switching actuating force on plunger	min. 15 N	min. 30 N	max. 300/min
Switching frequency	max. 300/min	max. 160/min	max. 300/min
Approach speed	Plunger D 40 m/min Plunger E 30 m/min Plunger K 10 m/min Plunger R 60 m/min Plunger L 120 m/min	Plunger D 40 m/min Plunger E 30 m/min Plunger K 10 m/min Plunger R 60 m/min Plunger L 80 m/min	Plunger D 40 m/min Plunger E 30 m/min Plunger K 10 m/min Plunger R 60 m/min Plunger L 120 m/min
Repeatability	Plunger D, E, K ± 0.002 mm Plunger R, L ± 0.01 mm	Plunger D, E, K ± 0.02 mm Plunger R, L ± 0.02 mm	Plunger D, E, K ± 0.002 mm Plunger R, L ± 0.01 mm

Installation

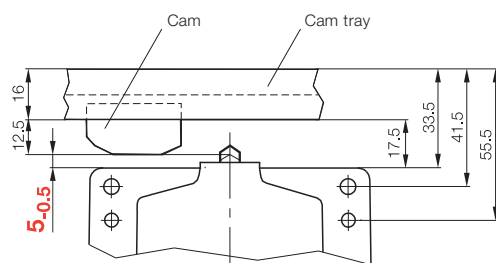

Note!
To ensure switching
function, the dimension
5-0.5 is especially critical.

1.2

Multiple
position
switches
series

100

62

61

72

Single
position
switches
series

F 60

5.1

5.2

5.3



Multiple position switches with safety switch positions per DIN EN 60204-1/VDE 0113

- Positive-opening contacts and rigid plungers for additional security per DIN EN 60204-1/VDE 0113
- Dual-chamber system with IP 67 protection: wear-free membrane with hermetic sealing from plunger mechanism and switch chamber

- Maintenance-free, self-lubricating plunger guide with slide bearing

Multiple position switches with function indicator

- Function indication for selectable three voltage ranges


Multiple position switches with wiper plate

- Increased function security under extreme conditions of use
- Wiper plate prevents plunger from sticking in the guide
- For use in wet areas with strongly adhering media

Connection options

- Thread for cable gland M20×1.5 on side and in flange (seals and plugs included)
- Connector (note permissible operating voltage for the connectors, see page 132).

Available sizes



Number of plungers	2	3	4	5	6	8	10
Dimension $l_1 = 12$ mm	64	72	84	96	112	130	160
l_2 when $l_1 = 16$ mm	64	84	96	112	130	160	192
Number of S80 without FD/FE	1	1	2	2	2		
Connector* S80 with FD/FE	1	2	2	3	3		
S90 without FD/FE	1	1	1	1	1	1	2
S90 with FD/FE	1	1	1	1	1	2	2

Dimensions in mm

*Number of connectors BSE 85 on request.

Ordering example:


BNS 813-D04-R12-62-10-02-FD-S80R

BNS 813-D - - -62- - - - -

No. of plungers	Plunger style	Plunger spacing	Switch elements	Safety switch elements	optional Function indication	optional Connector
02 2×	D Chisel	12 12 mm	10 BSE 61	No. from flange	FD 6...60 V AC/DC (for BSE 30.0 and BSE 61)	S80R 5-pin, right
03 3×	K Ball	16 16 mm	Remaining switch positions BSE 30.0			S80L 5-pin, left
04 4×	R Roller		12 only BSE 61		FE 90...250 V AC/DC (for BSE 30.0 and BSE 61)	S80S 5-pin, right and left
...	L Roller bearing		20 BSE 85	Remaining switch positions BSE 30.0	FC 24...28 V DC (only for BSE 85)	S90R 12-pin, right
	E Chisel with wiper plate		22 only BSE 85			S90L 12-pin, left
						S90S 12-pin, right and left








Type	Multiple position switch with positive-opening contacts
Plunger spacing	12 mm or 16 mm

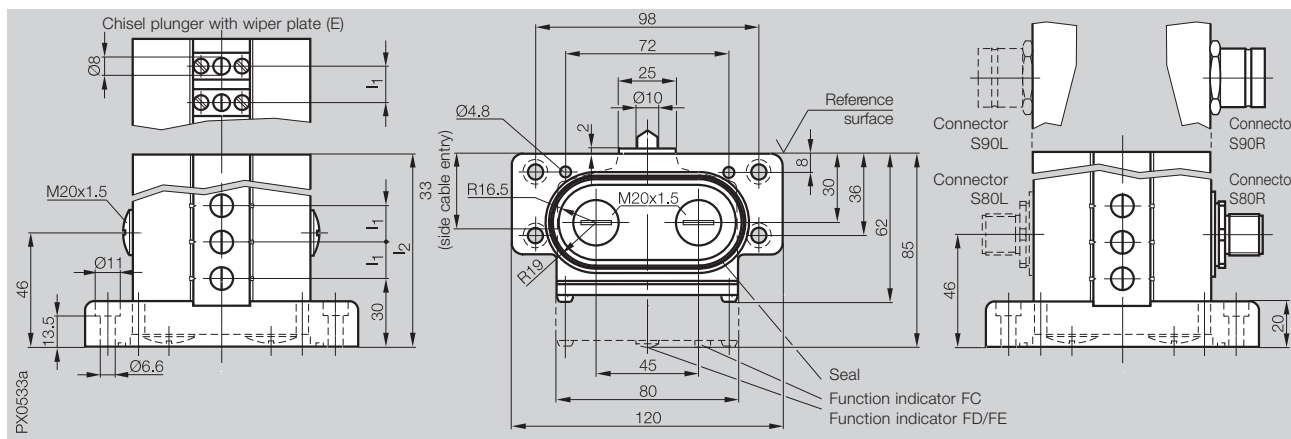

Plunger style	Chisel (D) , Ball (K) , Roller (R) , Roller bearing (L) or Chisel with wiper plate (E)
Plunger material	Stainless steel, contact surfaces induction hardened
Housing material	Cast aluminum, corrosion-resistant, anodized finish
Connection type	M20×1.5 for connector or cable gland
Ambient temperature range	–5...+85 °C
Degree of protection per IEC 60529	IP 67
Function indicator	LED 6...60 V AC/DC (FD) , 90...250 V AC/DC (FE) or 24...28 V DC (FC)

With switch element	BSE 61 per DIN EN 60204-1/VDE 0113	BSE 85 per DIN EN 60204-1/VDE 0113	BSE 30.0
Ordering code	BNS 813-D - -62- 1 - -	BNS 813-D - -62- 2 - -	BNS 813-D - -62- 0 - -
Wiring diagram, style			




Switch element			
Contact material	Silver	Silver	Silver, gold plated
Switching principle	Creep switch, positive-opening	Snap switch, positive opening (normally-closed)	Snap switch
Contact system	Normally-closed, double interruption	Dual-changeover: 1. NO (snap function), 2. Positive-opening (double-interruption), all galvanically isolated	dual changeover, one normally-open and one normally-closed, galvanically isolated
Electrical data	see page 116	see page 116	see page 116
Approval	CSA, CCC	cULus, CSA, CCC	UL, CSA, CCC

Mechanical data

Mechanical data		Model 100	Model 100	Model 100
Plunger point to reference surface		8 mm	8 mm	8 mm
Switchpoint to reference surface		7 mm	6.5 mm	6 mm
Maximum plunger travel		4 mm	4 mm	5.5 mm
Assured opening after plunger travel		2.5 mm	2.5 mm	
Switching actuating force on plunger		min. 15 N	min. 30 N	min. 20 N
Switching frequency		max. 300/min	max. 160/min	max. 300/min
Approach speed	Plunger D	40 m/min	40 m/min	40 m/min
	Plunger E	30 m/min	30 m/min	30 m/min
	Plunger K	10 m/min	10 m/min	10 m/min
	Plunger R	60 m/min	60 m/min	60 m/min
	Plunger L	120 m/min	80 m/min	120 m/min
Repeatability	Plunger D, E, K	± 0.002 mm	± 0.02 mm	± 0.002 mm
	Plunger R, L	± 0.01 mm	± 0.02 mm	± 0.01 mm

Installation

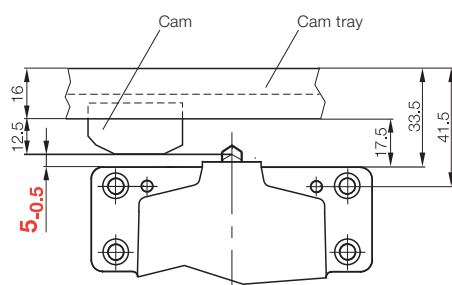

Note!

To ensure switching function, the dimension 5-0.5 is especially critical.

1.2

Multiple position switches series

100

62

61

72

Single
position
switches
series

F 60

5.1

5.2

5.3



Multiple position switches with safety switch positions per DIN EN 60204-1/VDE 0113

- Positive-opening contacts and rigid plungers for additional security per DIN EN 60204-1/VDE 0113
- Dual-chamber system with IP 67 protection: wear-free membrane with hermetic sealing from plunger mechanism and switch chamber

- Maintenance-free, self-lubricating plunger guide with slide bearing

Multiple position switches with function indicator

- Function indication for selectable three voltage ranges

Multiple position switches with wiper plate

- Increased function security under extreme conditions of use
- Wiper plate prevents plunger from sticking in the guide
- For use in wet areas with strongly adhering media

Connection options


- Thread for cable gland M20×1.5 on side and in flange (seals and plugs included)
- Connector (note permissible operating voltage for the connectors, see page 132).

Available sizes

No. of plungers	Plunger spacing Dimension	Housing B Standard		Housing B		Housing C		Number of connectors* S80 without FD/FE	Number of connectors* S80 with FD/FE	Number of connectors* S90 without FD/FE	Number of connectors* S90 with FD/FE
		l_1	l_2	b_1	b_2	l_2	b_2				
2	12	36	12	60	30	48	24	1	1	1	1
3	12	48	12	60	24	60	24	1	2	1	1
4	12	60	12					2	2	1	1
5	12	72	12					2	3	1	1
6	12	84	12					2	3	1	1
2	16	48	16	60	30	60	30	1	1	1	1
3	16	72	16					1	2	1	1
4	16	84	16					2	2	1	1

Dimensions in mm

*Number of connectors BSE 85 on request.



Ordering example:


BNS 813-B06-K12-61-A-12-02-FE-S80R

BNS 813- - - - -61- - - - -

Housing style	No. of plungers	Plunger style	Plunger spacing	Distance l_3	Switching elements	Safety switch elements	optional Function indication	optional Connector
B Standard	02 2×	D Chisel	12 12 mm	A 12 mm	10 BSE 61	No. from flange	FD 6...60 V AC/DC (for BSE 30.0 and BSE 61)	S80R 5-pin, right
2× M20×1.5 on side	03 3×	K Ball	16 16 mm	B 16 mm	Remaining switch positions BSE 30.0		FE 90...250 V AC/DC (for BSE 30.0 and BSE 61)	S80L 5-pin, link
B 3× M20×1.5 on side and in flange	04 4×	R Roller		C 24 mm	only BSE 61			S80S 5-pin, right and left
	...	L Roller bearing		D 30 mm	12 BSE 85		FC 24...28 V DC (only for BSE 85)	S90R 12-pin, right
C 2× M20×1.5 on side and cable entry in flange		E Chisel with wiper plate			20 Remaining switch positions BSE 30.0			S90L 12-pin, left
					22 only BSE 85			S90S 12-pin, right and left









Type	Multiple position switch with positive-opening contacts
Plunger spacing	12 mm or 16 mm

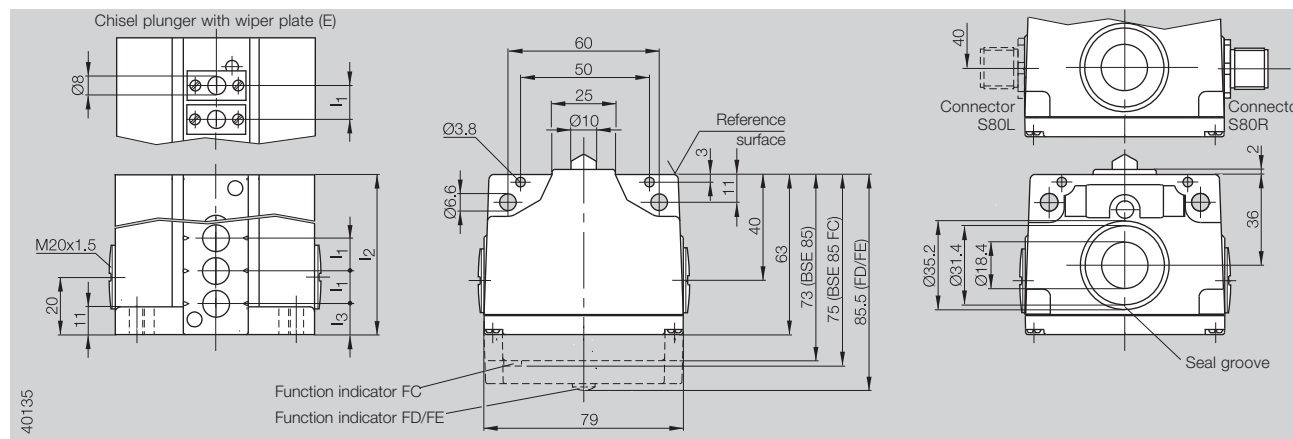

Plunger style	Chisel (D) , Ball (K) , Roller (R) , Roller bearing (L) or Chisel with wiper plate (E)
Plunger material	Stainless steel, contact surfaces induction hardened
Housing material	Cast aluminum, corrosion-resistant, anodized finish
Connection type	M20×1.5 for connector or cable gland
Ambient temperature range	–5...+85 °C
Degree of protection per IEC 60529	IP 67
Function indicator	LED 6...60 V AC/DC (FD) , 90...250 V AC/DC (FE) or 24...28 V DC (FC)


With switch element	BSE 61 per DIN EN 60204-1/VDE 0113	BSE 85 per DIN EN 60204-1/VDE 0113	BSE 30.0
Ordering code	BNS 813- - -61- 1 - -	BNS 813- - -61- 2 - -	BNS 813- - -61- 0 - -
Wiring diagram, style			



Switch element			
Contact material	Silver	Silver	Silver, gold plated
Switching principle	Creep switch, positive-opening	snap switch, positive opening (normally-closed)	Snap switch
Contact system	Normally-closed, double interruption	Dual-changeover: 1. NO (snap function), 2. Positive-opening (double-interruption), all galvanically isolated	dual changeover, one normally-open and one normally-closed, galvanically isolated
Electrical data	see page 116	see page 116	see page 116
Approval	CSA, CCC	cULus, CSA, CCC	UL, CSA, CCC

Mechanical data				
Plunger point to reference surface		8 mm	8 mm	8 mm
Switchpoint to reference surface		7 mm	6.5 mm	6 mm
Maximum plunger travel		4 mm	4 mm	5.5 mm
Assured opening after plunger travel		2.5 mm	2.5 mm	
Switching actuating force on plunger		min. 15 N	min. 30 N	min. 20 N
Switching frequency		max. 300/min	max. 160/min	max. 300/min
Approach speed	Plunger D	40 m/min	40 m/min	40 m/min
	Plunger E	30 m/min	30 m/min	30 m/min
	Plunger K	10 m/min	10 m/min	10 m/min
	Plunger R	60 m/min	60 m/min	60 m/min
	Plunger L	120 m/min	80 m/min	120 m/min
Repeatability	Plunger D, E, K	± 0.002 mm	± 0.02 mm	± 0.002 mm
	Plunger R, L	± 0.01 mm	± 0.02 mm	± 0.01 mm

Installation

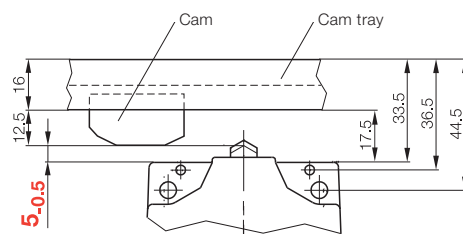

Note!
To ensure switching function, the dimension 5.05 is especially critical.



Multiple position switches with safety switch positions per DIN EN 60204-1/VDE 0113

- Positive-opening contacts and rigid plungers for additional security per DIN EN 60204-1/VDE 0113
- Dual-chamber system with IP 67 protection: wear-free membrane with hermetic sealing from plunger mechanism and switch chamber

- Maintenance-free, self-lubricating plunger guide with slide bearing

Multiple position switches with function indicator

- Function indication for selectable three voltage ranges


Multiple position switches with wiper plate

- Increased function security under extreme conditions of use
- Wiper plate prevents plunger from sticking in the guide
- For use in wet areas with strongly adhering media

Connection options

- Thread for cable gland M25×1.5 on side and in flange (Gaskets and plugs included)
- Connector (note permissible operating voltage for the connectors, see page 132).

Available sizes



Number of plungers	2	3	4	5	6	8	10
Dimension l ₂ when l ₁ = 12 mm	84	84	100	116	132	164	180
Dimension l ₃ when l ₁ = 12 mm	66	66	82	98	114	146	162
Dimension l ₄ when l ₁ = 12 mm	54	54	68	84	100	132	148
Dimension l ₂ when l ₁ = 16 mm	84	100	116	132	148	180	212
Dimension l ₃ when l ₁ = 16 mm	66	82	98	114	130	162	194
Dimension l ₄ when l ₁ = 16 mm	54	68	84	100	116	148	180
Number of Connector*	S80 without FD/FE	1	1	2	2		
	S80 with FD/FE	1	2	2	3	3	
	S90 without FD/FE	1	1	1	1	1	1
	S90 with FD/FE	1	1	1	1	1	2

Dimensions in mm

*Number of connectors BSE 85 on request.

Ordering example:

BNS 813-B04-R12-72-10-01-FD-S80R

BNS 813-B - - -72- - - -


No. of plungers	Plunger style	Plunger spacing	Switch elements	Safety switch elements	optional Function indication	optional Connector
02 2×	D Chisel	12 12 mm	10 BSE 61	No. from flange	FD 6...60 V AC/DC (for BSE 30.0 and BSE 61)	S80R 5-pin, right
03 3×	K Ball	16 16 mm	Remaining switch positions BSE 30.0			S80L 5-pin, left
04 4×	R Roller bearing		12 only BSE 61		FE 90...250 V AC/DC (for BSE 30.0 and BSE 61)	S80S 5-pin, right and left
...	L Roller bearing		20 BSE 85		FC 24...28 V DC (only for BSE 85)	S90R 12-pin, right
	E Chisel with wiper plate		Remaining switch positions BSE 30.0			S90L 12-pin, left
			22 only BSE 85			S90S 12-pin, right and left

**Not for new applications.
Still available for replacements.**

Mechanical Multiple Position Switches with Safety Switch Positions

Series 72

Type	Multiple position switch with positive-opening contacts
Plunger spacing	12 mm or 16 mm

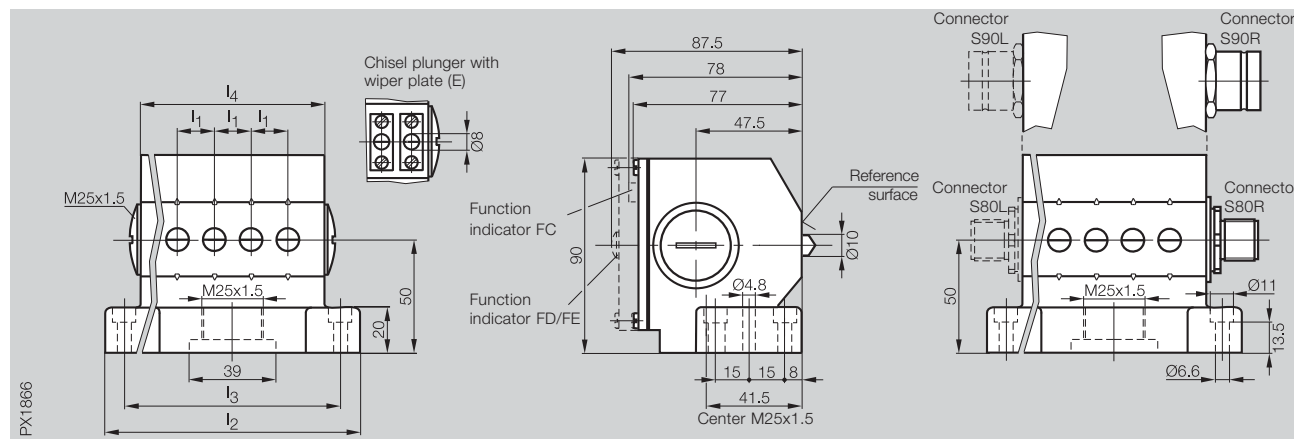

Plunger style	Chisel (D), Ball (K), Roller (R), Roller bearing (L) or Chisel with wiper plate (E)
Plunger material	Stainless steel, contact surfaces induction hardened
Housing material	Cast aluminum, corrosion-resistant, anodized finish
Connection type	M25x1.5 for connector or cable gland
Ambient temperature range	-5...+85 °C
Degree of protection per IEC 60529	IP 67
Function indicator	LED 6...60 V AC/DC (FD), 90...250 V AC/DC (FE) or 24...28 V DC (FC)

With switch element

	BSE 61 per DIN EN 60204-1/VDE 0113	BSE 85 per DIN EN 60204-1/VDE 0113	BSE 30.0
Ordering code	BNS 813-B - -72-1 - -	BNS 813-B - -72-2 - -	BNS 813-B - -72-0 - -
Wiring diagram, style			


Switch element

Contact material	Silver	Silver	Silver, gold plated
Switching principle	Creep switch, positive-opening	snap switch, positive opening (normally-closed)	Snap switch
Contact system	Normally-closed, double interruption	Dual-changeover: 1. NO (snap function), 2. Positive-opening (double-interruption), all galvanically isolated	dual changeover, one normally-open and one normally-closed, galvanically isolated
Electrical data	see page 116	see page 116	see page 116
Approval	CSA, CCC	cULus, CSA, CCC	UL, CSA, CCC

Mechanical data

Plunger point to reference surface	6 mm	6 mm	6 mm
Switchpoint to reference surface	5 mm	4.5 mm	4 mm
Maximum plunger travel	4 mm	4 mm	5.5 mm
Assured opening after plunger travel	2.5 mm	2.5 mm	
Switching actuating force on plunger	min. 15 N	min. 30 N	min. 20 N
Switching frequency	max. 300/min	max. 160/min	max. 300/min
Approach speed	Plunger D: 40 m/min Plunger E: 30 m/min Plunger K: 10 m/min Plunger R: 60 m/min Plunger L: 120 m/min	40 m/min 30 m/min 10 m/min 60 m/min 80 m/min	40 m/min 30 m/min 10 m/min 60 m/min 120 m/min
Repeatability	Plunger D, E, K: ± 0.002 mm Plunger R, L: ± 0.01 mm	± 0.02 mm ± 0.02 mm	± 0.002 mm ± 0.01 mm

Installation

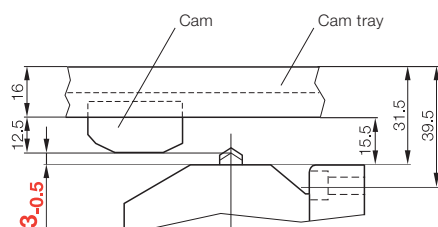

Note!

To ensure switching function, the dimension 3.0.5 is especially critical.

1.2

Multiple position switches series

100

62

61

72

Single position switches series

F 60

5.1

5.2

5.3



**Single position switches
per DIN 43693 with
safety switch positions
per DIN EN 60204-1/
VDE 0113**

- Positive-opening contacts and rigid plungers for additional security per DIN EN 60204-1/VDE 0113
- Dual-chamber system with IP 67 protection: wear-free membrane with hermetic sealing from plunger mechanism and switch chamber

- Maintenance-free, self-lubricating plunger guide with slide bearing
- Plunger not rotatable, approach direction cannot be changed (see ordering code)

**Single position switch
with function indicator**

- Function indication for selectable three voltage ranges

**Single position switch
with wiper plate**

- Increased function security under extreme conditions of use
- Wiper plate prevents plunger from sticking in the guide
- For use in wet areas with strongly adhering media

Connection options

- Thread for cable gland M16×1.5 (Scope of delivery: Seals and cover screws)
- Connector (note permissible operating voltage for the connectors, see page 132).

Ordering example:


BNS 813-FD-60-183-FD-S80R

BNS 813-F -60-18 - - -

Plunger style	Switch elements	optional Function indication	optional Connector
D Chisel	3 BSE 61 Approach direction longitudinal, parallel to mounting surface	FD 6...60 V AC/DC (for BSE 61)	S80R 5-pin, right
K Ball			S80L 5-pin, left
R Roller	5 BSE 61 Approach direction lateral, 90° to mounting surface	FE 90...250 V AC/DC (for BSE 61)	
L Roller bearing	6 BSE 85 Approach direction longitudinal, parallel to mounting surface	FC 24...28 V DC (for BSE 85)	
E Chisel with wiper plate	7 BSE 85 Approach direction lateral, 90° to mounting surface		




Type	Single position switch with positive-opening contacts
Mounting and function dimensions	per DIN 43693

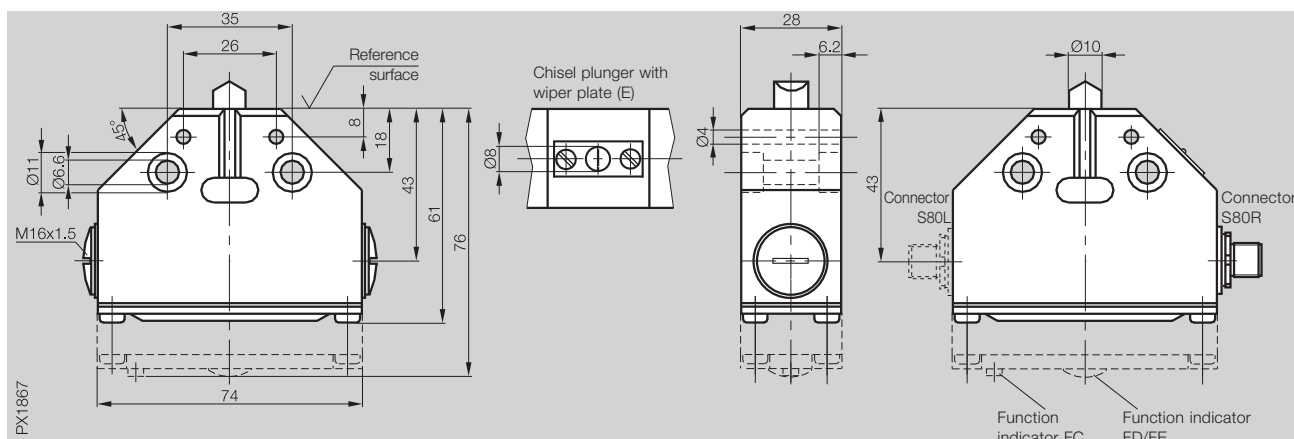

Plunger style	Chisel (D) , Ball (K) , Roller (R) , Roller bearing (L) or Chisel with wiper plate (E)
Plunger material	Stainless steel, contact surfaces induction hardened
Housing material	Cast aluminum, corrosion-resistant, anodized finish
Connection type	M16×1.5 for cable gland or connector
Ambient temperature range	–5...+85 °C
Degree of protection per IEC 60529	IP 67
Function indicator	LED 6...60 V AC/DC (FD) , 90...250 V AC/DC (FE) or 24...28 V DC (FC)


With switch element	BSE 61 per DIN EN 60204-1/VDE 0113	BSE 85 to DIN EN 60204-1/VDE 0113
Ordering code	BNS 813-F -60- 183/185 - -	BNS 813-F -60- 186/187 - -
Wiring diagram, style		



Switch element		
Contact material	Silver	Silver
Switching principle	Creep switch, positive-opening	Snap switch, positive opening (normally-closed)
Contact system	Normally-closed, double interruption	Dual-changeover: 1. NO (snap function), 2. Positive-opening (double-interruption), all galvanically isolated
Electrical data	see page 116	see page 116
Approval	CSA, CCC	cULus, CSA, CCC

Mechanical data			
Plunger point to reference surface		8 mm	8 mm
Switchpoint to reference surface		7 mm	4.5 mm
Maximum plunger travel		4 mm	6.5 mm
Assured opening after plunger travel		2.5 mm	2.5 mm
Switching actuating force on plunger		min. 15 N	min. 30 N
Switching frequency		max. 300/min	max. 160/min
Approach speed	Plunger D	40 m/min	40 m/min
	Plunger E	30 m/min	30 m/min
	Plunger K	10 m/min	10 m/min
	Plunger R	60 m/min	60 m/min
	Plunger L	120 m/min	80 m/min
Repeatability	Plunger D, E, K	± 0.002 mm	± 0.02 mm
	Plunger R, L	± 0.01 mm	± 0.02 mm

Installation

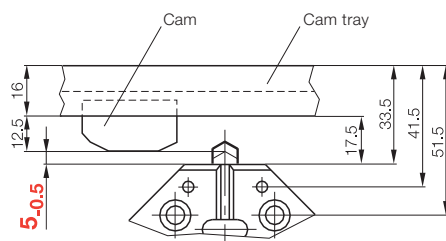

Note!
To ensure switching function, the dimension 5-0.5 is especially critical.

1.2

Multiple position switches series

100
62
61
72


**Single
position
switches
series
F 60**

5.1

5.2

5.3



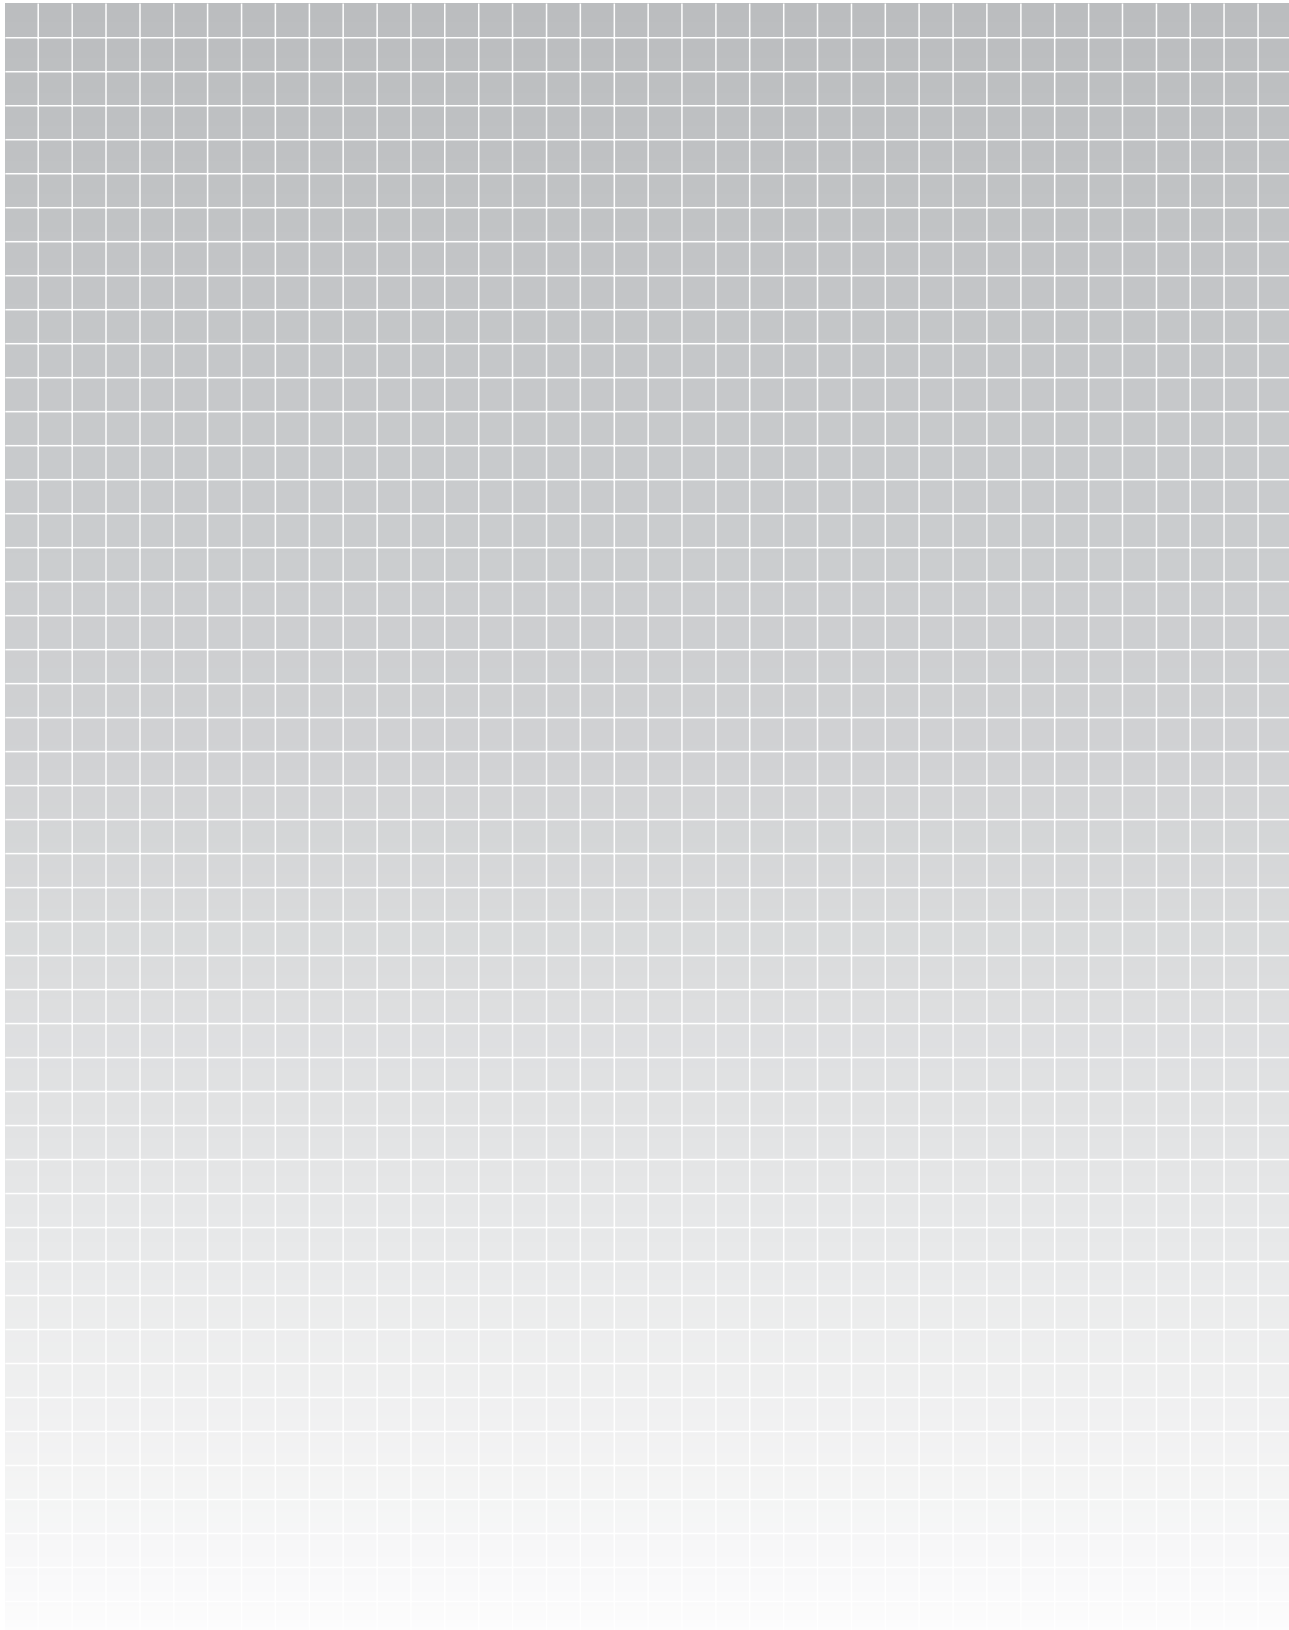

Mechanical single and multiple position switches with forced opening

60 Series 46
62 Series 40

Mechanical single position switches with forced opening

64 Series 99 and 100

1.3

Multiple position switches series

46

40

Single position switches series

99

100

5.1

5.2

5.3



more added value

- Long service life
- Compact form factor for ease of installation



Multiple position switches with forced opening

- Smallest plunger spacing for mechanical multiple position switches (8 mm)
- Switch element with forced opening
- Dual-chamber system with IP 67 protection: wear-free membrane with hermetic sealing from plunger mechanism and switch chamber


- Maintenance-free, self-lubricating plunger guide with slide bearing
- All switch positions with forced opening: Rigid plungers

Multiple position switches with wiper plate

- Increased function security under extreme conditions of use
- Wiper plate prevents plunger from sticking in the guide
- For use in wet areas with strongly adhering media

Connection options

- Thread for cable gland M16×1.5 on side and in flange (seals and plugs included)
- Connector (note permissible operating voltage for the connectors, see page 132).



Available sizes

Number of plungers		2	3	4	5	6	8	10
Dimension l ₂ when	l ₁ = 8 mm	49	59	64	72	80	96	112
	l ₁ = 10 mm	49	59	72	80	89	112	129
Number of connectors	S80 without FC	1	1	2	2	2	3	3
	S80 with FC	1	2	2	3	3		

Dimensions in mm

Size 12x with 8 mm spacing on request.

Ordering example:

BNS 813-B02-D08-46-49-01-FC-S80R


BNS 813-B - - -46- - - - -

No. of plungers	Plunger style	Plunger spacing	Switch elements	Switch elements with forced opening	optional Function indication	optional Connector
02 2x	D Chisel	08 8 mm	30 BSE 63, remaining switch positions BSE 69.1	No. from flange	FC 24...28 V DC	S80R 5-pin, right
03 3x	K Ball	10 10 mm	32 BSE 63, remaining switch positions BSE 73.1			S80L 5-pin, left
04 4x	R Roller		39 all BSE 63			S80S 5-pin, right and left
...	E Chisel with wiper plate		41 BSE 64, remaining switch positions BSE 70.1			Only with BSE 69.1, BSE 73.1 or BSE 63.
			43 BSE 64, remaining switch positions BSE 74.1			
			49 all BSE 64			

Mechanical Multiple Position Switches with Forced Opening

Series 46

Type	Multiple position switch with forced opening contacts
Plunger spacing	8 mm or 10 mm

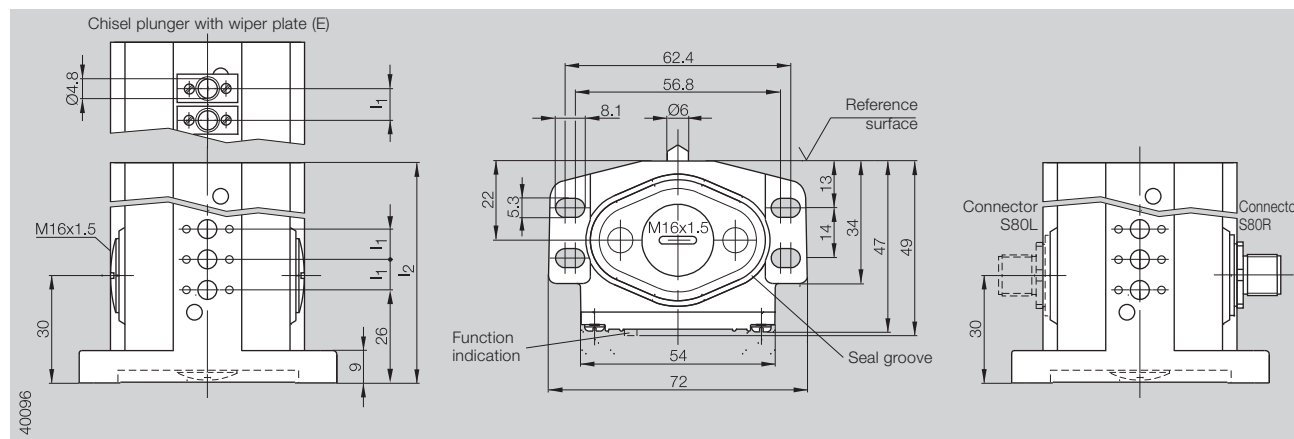

Plunger style	Chisel (D), Ball (K), Roller (R), Roller bearing (L) or Chisel with wiper plate (E)
Plunger material	Stainless steel, contact surfaces induction hardened
Housing material	Cast aluminum, corrosion-resistant, anodized finish
Connection type	M16x1.5 for cable gland or connector
Ambient temperature range	-5...+85 °C
Degree of protection per IEC 60529	IP 67
Function indicator	LED 24...28 V DC (FC)


With switch element

Ordering code

Wiring diagram, style


BSE 63

BNS 813-...-46-3_



BSE 64

BNS 813-...-46-4_




Switch element

Contact material	Silver	Silver
Switching principle	Snap switch	Snap switch
Contact system	Single-pole change-over, NO with snap function, NC with forced opening	Single-pole change-over, NO with snap function, NC with forced opening
Connection type	Solder connection	Screw terminal
Electrical data	see page 117	see page 117
Approvals	UL, CSA, CCC	UL, CSA, CCC

Mechanical data

Plunger point to reference surface	4 mm	4 mm
Switchpoint to reference surface	3.5 mm	3.5 mm
Maximum plunger travel	2.1 mm	2.1 mm
Assured separation after plunger travel	1 mm	1 mm
Switching actuating force on plunger	min. 8 N	min. 8 N
Switching frequency	max. 200/min	max. 200/min
Approach speed	Plunger D: 20 m/min Plunger E: 10 m/min Plunger K: 9 m/min Plunger R: 60 m/min	Plunger D: 20 m/min Plunger E: 10 m/min Plunger K: 9 m/min Plunger R: 60 m/min
Repeatability	Plunger D, E: ±0.02 mm Plunger K: ±0.03 mm Plunger R: ±0.05 mm	Plunger D, E: ±0.02 mm Plunger K: ±0.03 mm Plunger R: ±0.05 mm

Installation

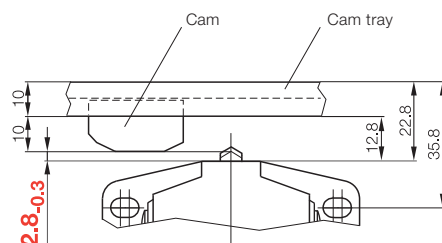

Note!

To ensure switching function, the dimension 2.8_{-0.3} is especially critical.

1.3

Multiple
position
switches
series

46

40

Single
position
switches
series

99

100

5.1

5.2

5.3



Multiple position switches with forced opening

- Smallest plunger spacing for mechanical multiple position switches (8 mm)
- Switch element with forced opening
- Dual-chamber system with IP 67 protection: wear-free membrane with hermetic sealing from plunger mechanism and switch chamber


- Maintenance-free, self-lubricating plunger guide with slide bearing
- All switch positions with forced opening: Rigid plungers

Multiple position switches with wiper plate

- Increased function security under extreme conditions of use
- Wiper plate prevents plunger from sticking in the guide
- For use in wet areas with strongly adhering media

Connection options

- Thread for cable gland M16×1.5 on side (Scope of delivery: Seals and cover screws)
- Connector (note permissible operating voltage for the connectors, see page 132).



Available sizes

No. of plungers	2	3	4	5	6
Dimension L ₁	34	42	50	58	66
S80 without FC	1	1	2	2	2
S80 with FC	1	2	2		

Dimensions in mm

Ordering example:

BNS 813-B04-D08-40-49-01-FC-S80R

BNS 813-B - - -40- - - - -

No. of plungers	Plunger style	Plunger spacing	Switch elements	Switch elements with forced opening	optional Function indication	optional Connector
02 2×	D Chisel	08 8 mm	30 BSE 63, remaining switch positions BSE 69.1	No. from flange	FC 24...28 V DC	S80R 5-pin, right
03 3×	K Ball		32 BSE 63, remaining switch positions BSE 73.1			S80L 5-pin, left
04 4×	R Roller		39 all BSE 63			S80S 5-pin, right and left
...	E Chisel with wiper plate		41 BSE 64, remaining switch positions BSE 70.1			Only with BSE 69.1, BSE 73.1 or BSE 63.
			43 BSE 64, remaining switch positions BSE 74.1			
			49 all BSE 64			




Mechanical Multiple Position Switches with Forced Opening

Series 40

Type	Multiple position switch with forced opening contacts
Plunger spacing	8 mm

CE

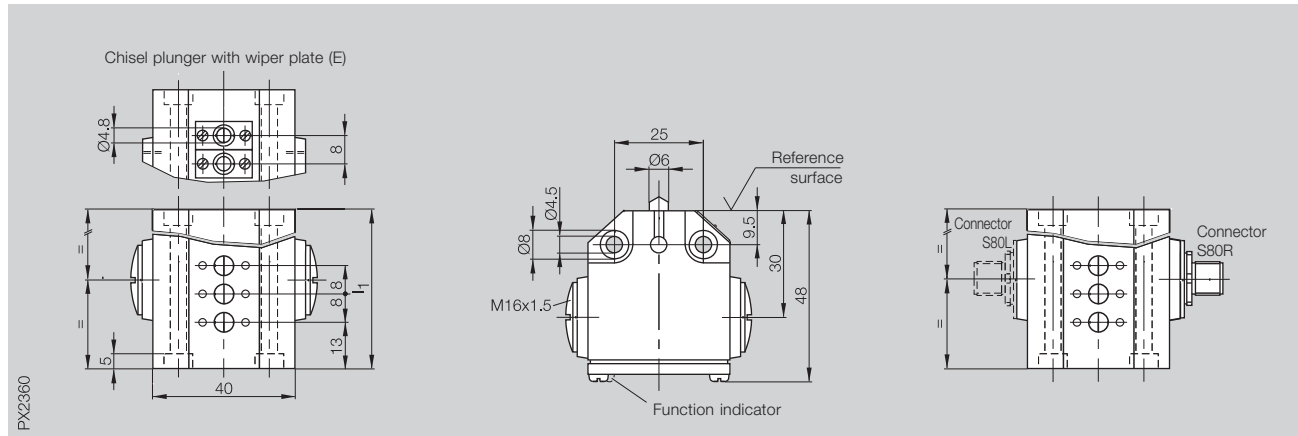

Plunger style	Chisel (D), Ball (K), Roller (R), Roller bearing (L) or Chisel with wiper plate (E)
Plunger material	Stainless steel, contact surfaces induction hardened
Housing material	Cast aluminum, corrosion-resistant, anodized finish
Connection type	M16x1.5 for cable gland or connector
Ambient temperature range	-5...+85 °C
Degree of protection per IEC 60529	IP 67
Function indicator	LED 24...28 V DC (FC)


With switch element

Ordering code

Wiring diagram, style


BSE 63

BNS 813-...-40-3_



BSE 64

BNS 813-...-40-4_




Switch element

Contact material	Silver	Silver
Switching principle	Snap switch	Snap switch
Contact system	Single-pole change-over, NO with snap function, NC with forced opening	Single-pole change-over, NO with snap function, NC with forced opening
Connection type	Solder connection	Screw terminal
Electrical data	see page 117	see page 117
Approval	UL, CSA, CCC	UL, CSA, CCC

Mechanical data

Plunger point to reference surface	4 mm	4 mm
Switchpoint to reference surface	3.5 mm	3.5 mm
Maximum plunger travel	2.1 mm	2.1 mm
Assured separation after plunger travel	1 mm	1 mm
Switching actuating force on plunger	min. 8 N	min. 8 N
Switching frequency	max. 200/min	max. 200/min
Approach speed	Plunger D: 20 m/min Plunger E: 10 m/min Plunger K: 9 m/min plunger R: 60 m/min	Plunger D: 20 m/min Plunger E: 10 m/min Plunger K: 9 m/min plunger R: 60 m/min
Repeatability	Plunger D, E: ±0.02 mm Plunger K: ±0.03 mm Plunger R: ±0.05 mm	Plunger D, E: ±0.02 mm Plunger K: ±0.03 mm Plunger R: ±0.05 mm

Installation

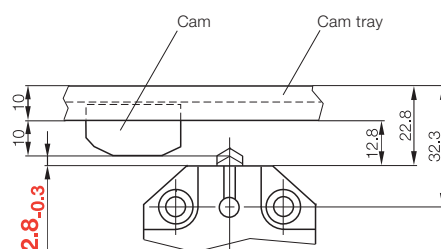

Note!

To ensure switching function, the dimension 2.8_{-0.3} is especially critical.

1.3

Multiple position switches series

46

40

Single position switches series

99

100

5.1

5.2

5.3



Single position switches with forced opening

- Switch element with forced opening
- Dual-chamber system with IP 67 protection: wear-free membrane with hermetic sealing from plunger mechanism and switch chamber
- Maintenance-free, self-lubricating plunger guide with slide bearing
- Switch position with forced opening: Rigid plunger
- Plunger not rotatable, approach direction cannot be changed (see ordering code)

Single position switch with wiper plate

- Increased function security under extreme conditions of use
- Wiper plate prevents plunger from sticking in the guide
- For use in wet areas with strongly adhering media

Connection options

- Thread for cable gland M12×1.5 for Series 99, Thread for cable gland M16×1.5 for Series 100
- Connector (note permissible operating voltage for the connectors, see page 132).

Ordering example:

BNS 813-100-E-49-FC-S80

BNL 813

Series	Plunger style	Switch elements	optional Function indicator	optional Connector
99 Series 99	D Chisel	38 BSE 63 Approach direction lateral, 90° to mounting surface	FC 24...28 V DC	S80 5-pin
100 Series 100	K Ball	39 BSE 63 Approach direction longitudinal, parallel to mounting surface		Only with BSE 63.
	R Roller	48 BSE 64 Approach direction lateral, 90° to mounting surface		
	E Chisel with wiper plate	49 BSE 64 Approach direction longitudinal, parallel to mounting surface		




Mechanical Single Position Switches with Forced Opening

Series 99 and 100

Type	Single position switch with forced opening contacts

CE

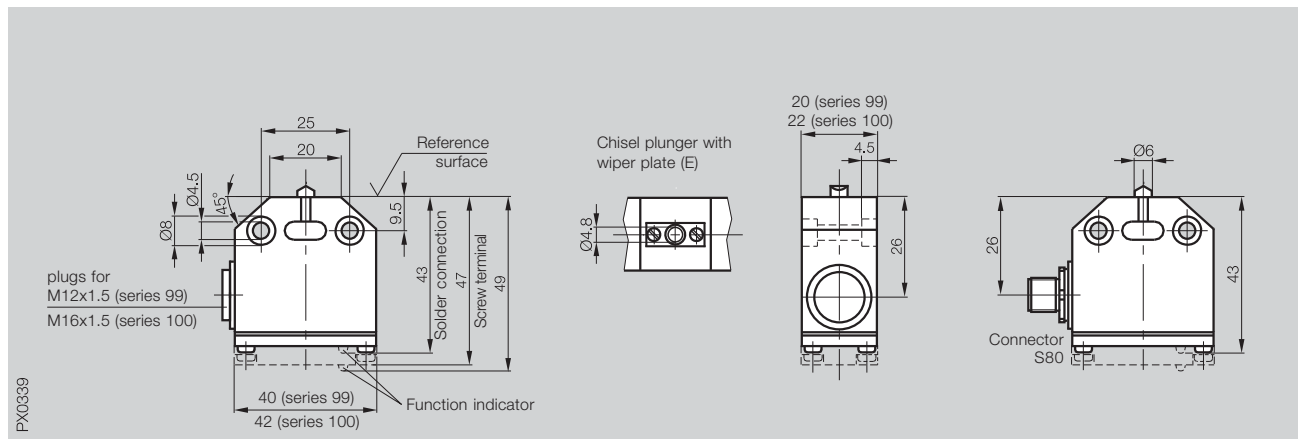

Plunger style	Chisel (D), Ball (K), Roller (R), Roller bearing (L) or Chisel with wiper plate (E)
Plunger material	Stainless steel, contact surfaces induction hardened
Housing material	Cast aluminum, corrosion-resistant, anodized finish
Connection type	Cable gland (M12x1.5 series 99, M16x1.5 series 100) or connector
Ambient temperature range	-5...+85 °C
Degree of protection per IEC 60529	IP 67
Function indicator	LED 24...28 V DC (FC)


With switch element

Ordering code

Wiring diagram, style


BSE 63

BNS 813-99/100- -3 - - -



BSE 64

BNS 813-99/100- -4 - - -




Switch element

Contact material	Silver	Silver
Switching principle	Snap switch	Snap switch
Contact system	Single-pole change-over, NO with snap function, NC with forced opening	Single-pole change-over, NO with snap function, NC with forced opening
Connection type	Solder connection	Screw terminal
Electrical data	see page 117	see page 117
Approval	UL, CSA, CCC	UL, CSA, CCC

Mechanical data

Plunger point to reference surface	4 mm	4 mm
Switchpoint to reference surface	3.5 mm	3.5 mm
Maximum plunger travel	2.1 mm	2.1 mm
Assured separation after plunger travel	1 mm	1 mm
Switching actuating force on plunger	min. 8 N	min. 8 N
Switching frequency	max. 200/min	max. 200/min
Approach speed	Plunger D 20 m/min Plunger E 10 m/min Plunger K 9 m/min Plunger R 60 m/min	Plunger D 20 m/min Plunger E 10 m/min Plunger K 9 m/min Plunger R 60 m/min
Repeatability	Plunger D, E ±0.02 mm Plunger K ±0.03 mm Plunger R ±0.05 mm	Plunger D, E ±0.02 mm Plunger K ±0.03 mm Plunger R ±0.05 mm

Installation

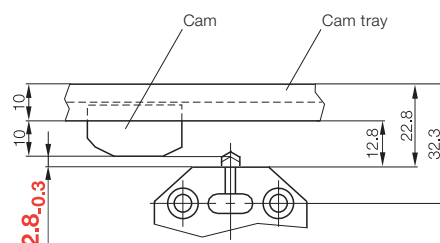

Note!

To ensure switching function, the dimension 2.8-0.3 is especially critical.

1.3

Multiple position switches series

46

40

Single position switches series

99


100

5.1

5.2

5.3



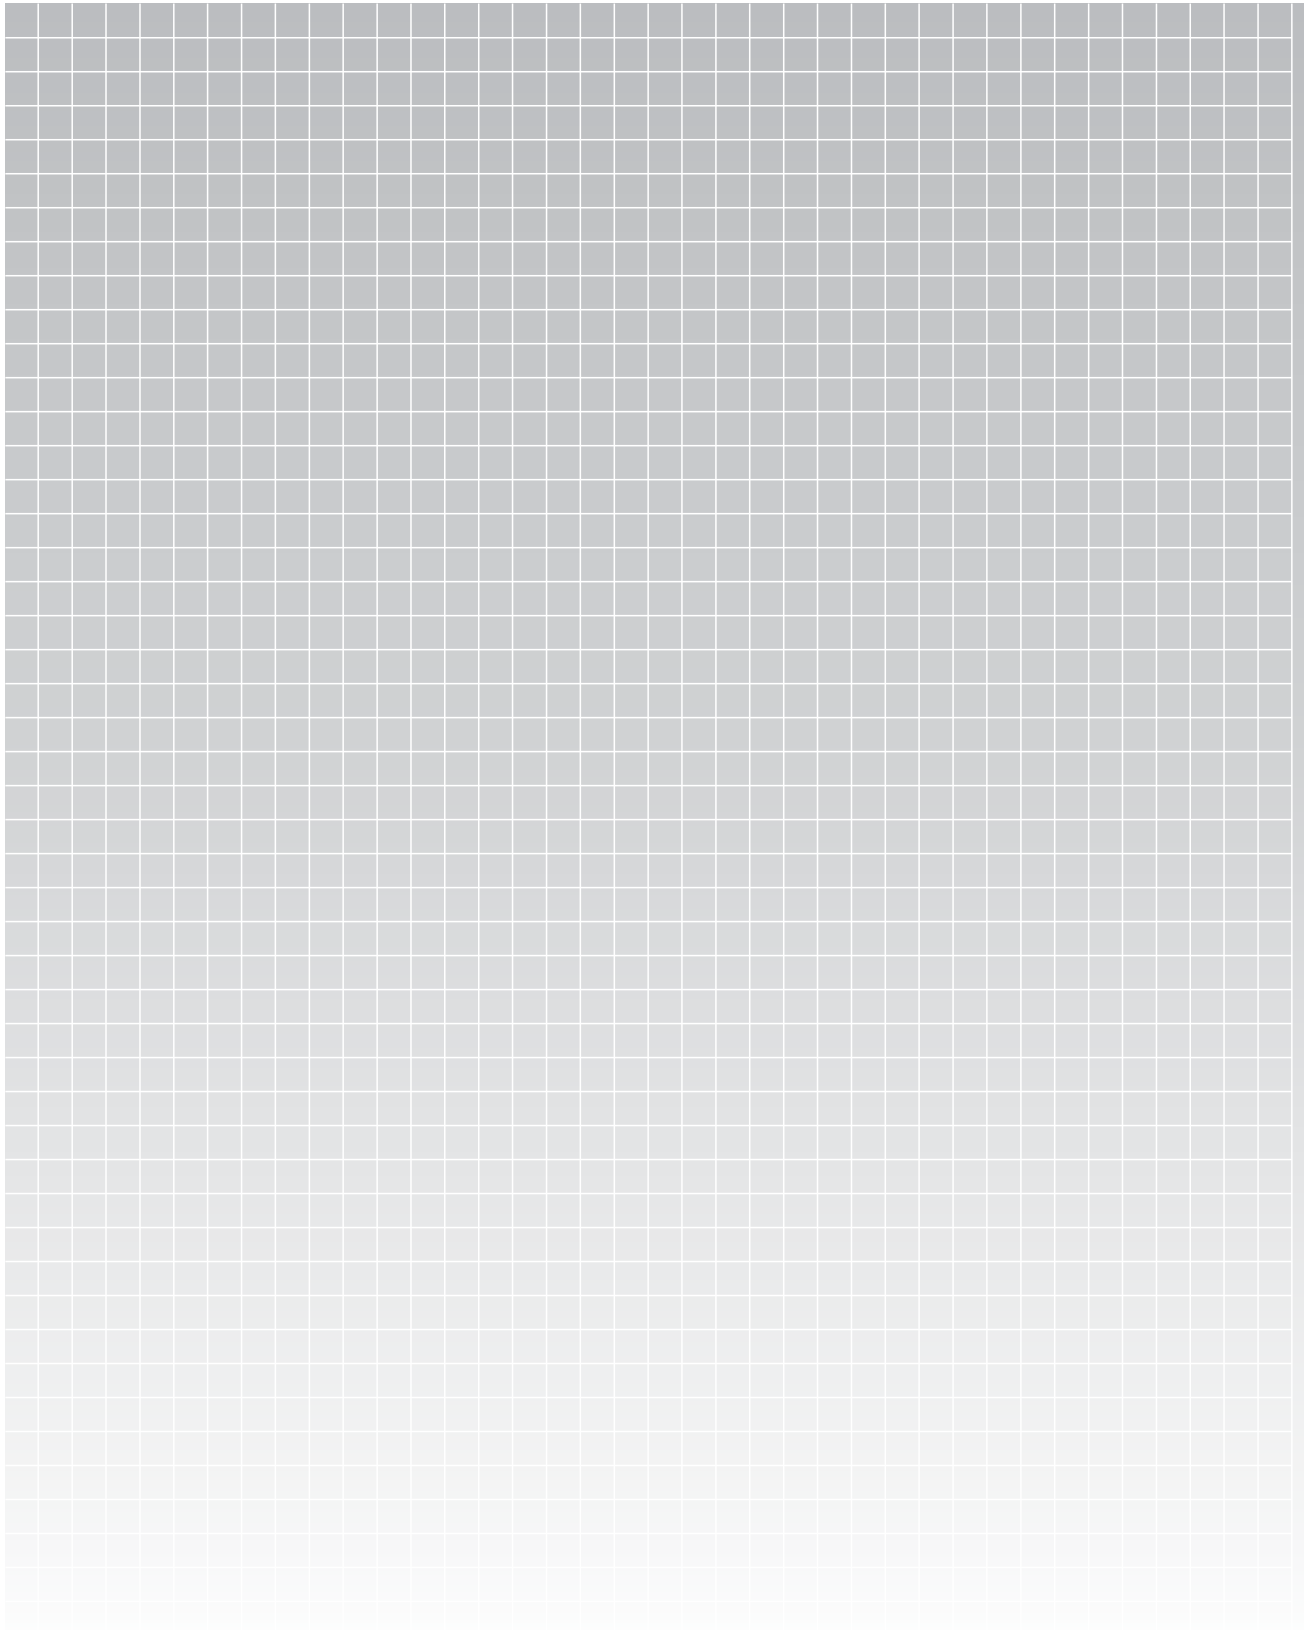

Mechanical multiple position switches with quick-change plunger unit

68	Series 100 per DIN 43697
70	Series 100 per DIN EN 60204-1/ VDE 0113
72	Series 61
74	Series 61 per DIN EN 60204-1/ VDE 0113
76	Quick-change block for series 100
77	Quick-change block for series 61

1.4

Multiple
position
switches
series

100

61


Quick-
change block
for series

100

61

more added value

- For the most extreme applications
- Long service life
- Quick-change plunger unit for short service time

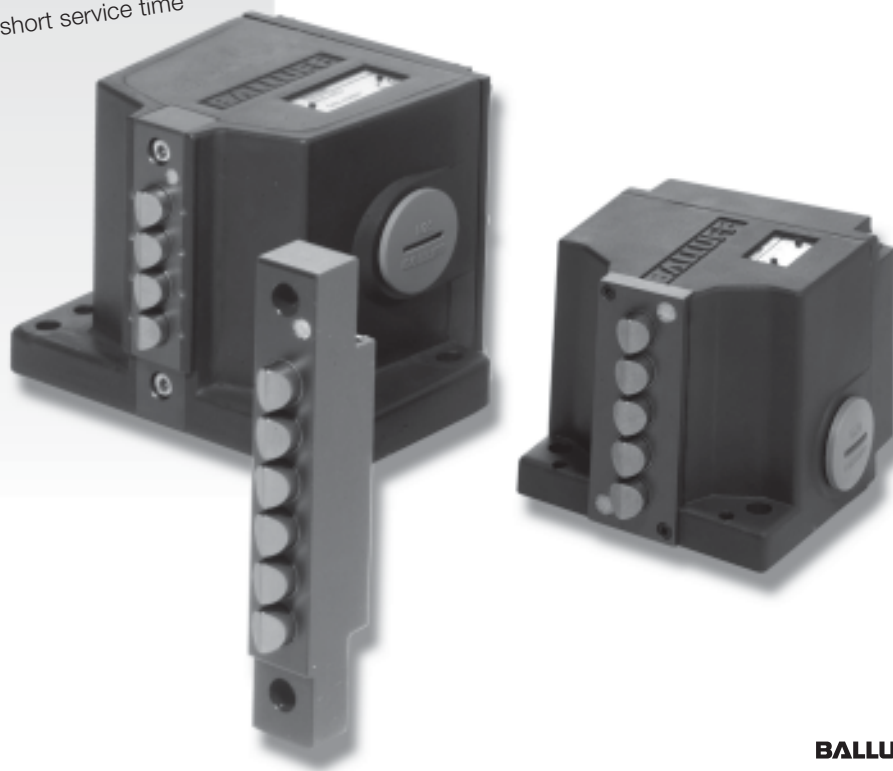

5.1

5.2

5.3



Multiple position switches per DIN 43697 for standard applications with quick-change plunger unit


- Dual-chamber system with IP 67 protection: wear-free membrane with hermetic sealing from plunger mechanism and switch chamber
- Maintenance-free, self-lubricating plunger guide with slide bearing

Connection options

- Thread for cable gland M25×1.5 on side and in flange (Gaskets and plugs included)
- Connector (note permissible operating voltage for the connectors, see page 132).

Multiple position switches with function indication

- Function indication for dual voltage range option



Available sizes

No. of plungers	2	3	4	5	6
Dimension $l_1 = 12$ mm	70	80	90	105	120
l_2 when $l_1 = 16$ mm	70	90	105	120	
Number of S80 without FD/FE	1	1	2	2	2
Connector S80 with FD/FE	1	2	2	3	3
S90 without FD/FE	1	1	1	1	1
S90 with FD/FE	1	1	1	1	1
S4 without FD (IO-Link)	1	1	1	1	1
S4 with FD (IO-Link)	1	1	1	1	1

Dimensions in mm

Ordering example:

BNS 829-D02-D16-100-10-FE-S80R

BNS 829-D - -100-10- - - -

**No. of
plungers**

02 2×

...

06 6×

**Plunger
style**

D Chisel

K Ball

R Roller

L Roller bearing

**Plunger
spacing**

12 12 mm

16 16 mm

**optional
Function
indicator**

FD 6...60

V AC/DC

FE 90...250

V AC/DC

**optional
Connector**

S80R 5-pin, right

S80L 5-pin, left

S80S 5-pin, right and left

S90R 12-pin, right

S90L 12-pin, left

S90S 12-pin, right and left

S4R-I 4-pin, right

only for IO-Link

S4L-I 4-pin, left

only for IO-Link




Mechanical Multiple Position Switches with Quick-Change Plunger Unit

Series 100
per DIN 43697

Type	Multiple position switch
Plunger spacing	12 mm or 16 mm
Mounting and function dimensions	per DIN 43697

CE

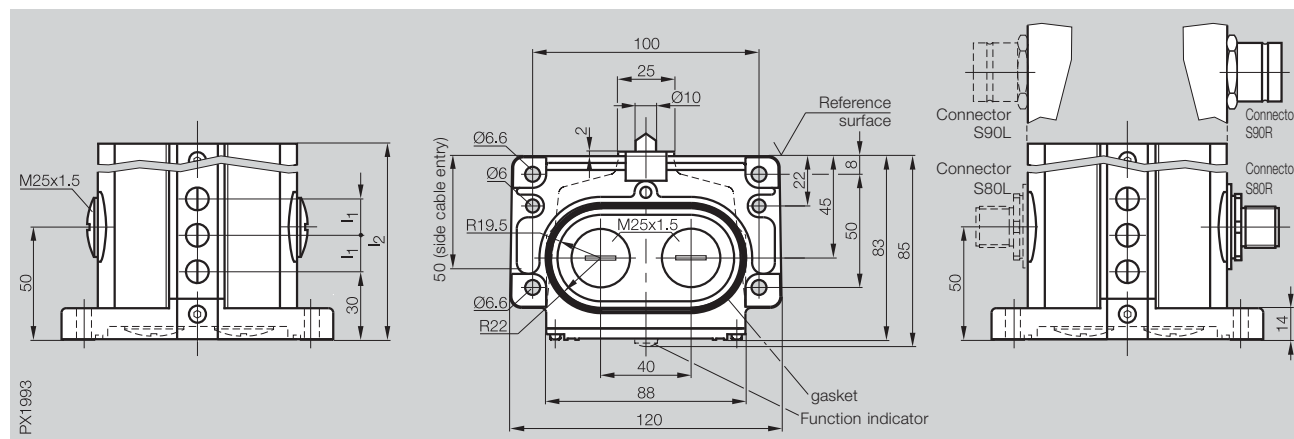

Plunger style	Chisel (D), Ball (K), Roller (R) or Roller Bearing (L)
Plunger material	Stainless steel, contact surfaces induction hardened
Housing material	Cast aluminum, corrosion-resistant, anodized finish
Connection type	M25x1.5 for connector or cable gland
Ambient temperature range	-5...+85 °C
Degree of protection per IEC 60529	IP 67
Function indicator	LED 6...60 V AC/DC (FD) or 90...250 V AC/DC (FE)



IO-Link

For additional information
see IO-Link brochure!


With switch element

Ordering code

Wiring diagram, style

BSE 30.0

BNS 829-D - -100-10- - -



Switch element

Contact material

Switching principle

Contact system

Silver, gold plated

Snap switch

Dual changeover, one normally-open and one normally-closed, galvanically isolated

Electrical data

Approval

see page 116

UL, CSA, CCC

Mechanical data

Plunger point to reference surface

Switchpoint to reference surface

Maximum plunger travel

Switching actuating force on plunger

Switching frequency

Approach

speed

Plunger D

Plunger K

Plunger R

Plunger L

Repeatability

Plunger D, K

Plunger R, L

8 mm

6 mm

5.5 mm

min. 20 N

max. 300/min

40 m/min

10 m/min


60 m/min

120 m/min

± 0.002 mm

± 0.01 mm

Installation

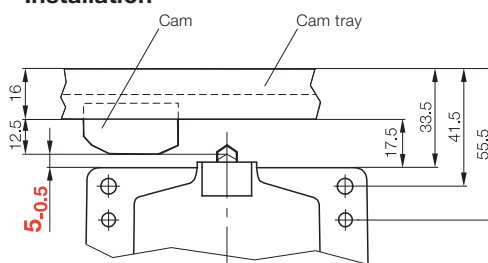

Note!

To ensure switching function, the dimension 5.0 is especially critical.

1.4

Multiple position switches series

100

61

Quick-change block for series

100

61

5.1

5.2

5.3



Multiple position switches per DIN 43697 with safety switch positions per DIN EN 60240-1/ VDE 0113 and quick-change plunger unit

- Forced-opening contacts and rigid plungers for additional security per DIN EN 60204-1/VDE 0113

- Dual-chamber system with IP 67 protection: wear-free membrane with hermetic sealing from plunger mechanism and switch chamber
- Maintenance-free, self-lubricating plunger guide with slide bearing


Connection options

- Thread for cable gland M25×1.5 on side and in flange (Gaskets and plugs included)
- Connector (note permissible operating voltage for the connectors, see page 132).

Multiple position switches with function indication

- Function indication for selectable three voltage ranges

Available sizes



No. of plungers	2	3	4	5	6
Dimension $l_1 = 12$ mm	70	80	90	105	120
l_2 when $l_1 = 16$ mm	70	90	105	120	
Number of S80 without FD/FE	1	1	2	2	2
Connector* S80 with FD/FE	1	2	2	3	3
S90 without FD/FE	1	1	1	1	1
S90 with FD/FE	1	1	1	1	1

Dimensions in mm

*Number of connectors with BSE 85 on request.

Ordering example:

BNS 823-D02-D12-100-20-03-FE-S80R

BNS 823-D - - -100- - - - -

No. of plungers	Plunger style	Plunger spacing	Switch elements	Safety switch elements	optional Function indication	optional Connector
02 2×	D Chisel	12 12 mm	10 BSE 61	No. from flange	FD 6...60 V AC/DC (for BSE 30.0 and BSE 61)	S80R 5-pin, right
...	K Ball	16 16 mm	Remaining switch positions BSE 30.0 only BSE 61		FE 90...250 V AC/DC (for BSE 30.0 and BSE 61)	S80L 5-pin, left
06 6×	R Roller		12 only BSE 61			S80S 5-pin, right and left
	L Roller bearing		20 BSE 85		FC 24...28 V DC (only for BSE 85)	S90R 12-pin, right
			Remaining switch positions BSE 30.0 only BSE 85			S90L 12-pin, left
						S90S 12-pin, right and left




Mechanical Multiple Position Switches with Quick-Change Plunger Unit

Series 100
per DIN 43697

Type	Multiple position switch with forced-opening contacts
Plunger spacing	12 mm or 16 mm
Mounting and function dimensions	per DIN 43697

CE

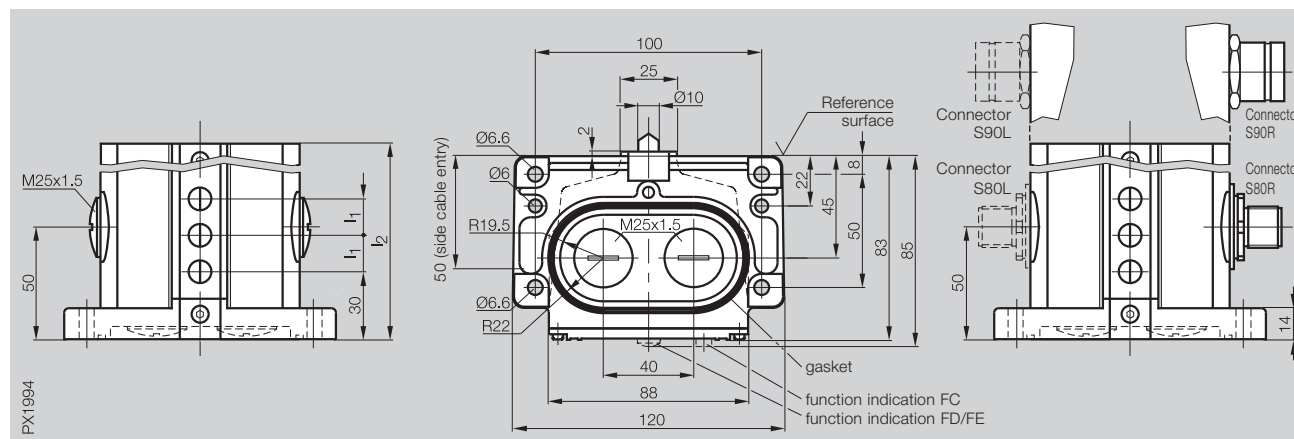

Plunger style	Chisel (D), Ball (K), Roller (R) or Roller Bearing (L)
Plunger material	Stainless steel, contact surfaces induction hardened
Housing material	Cast aluminum, corrosion-resistant, anodized finish
Connection type	M25x1.5 for connector or cable gland
Ambient temperature range	-5...+85 °C
Degree of protection per IEC 60529	IP 67
Function indicator	LED 6...60 V AC/DC (FD), 90...250 V AC/DC (FE) or 24...28 V DC (FC)

With switch element

	BSE 61 per DIN EN 60204-1/VDE 0113	BSE 85 per DIN EN 60204-1/VDE 0113	BSE 30.0
Ordering code	BNS 823-D - - -100-1 - - -	BNS 823-D - - -100-2 - - -	BNS 823-D - - -100-0 - - -
Wiring diagram, style			


Switch element

Contact material	Silver	Silver	Silver, gold plated
Switching principle	creep switch, forced-opening	snap switch, forced-opening (normally-closed)	Snap switch
Contact system	Normally-closed, double interruption	Dual-changeover: 1. NO (snap function), 2. Positive-opening (double-interruption), all galvanically isolated	dual changeover, one normally-open and one normally-closed, galvanically isolated
Electrical data	see page 116	see page 116	see page 116
Approval	CSA, CCC	cULus, CSA, CCC	UL, CSA, CCC

Mechanical data

Plunger point to reference surface	8 mm	8 mm	8 mm
Switchpoint to reference surface	7 mm	6.5 mm	6 mm
Maximum plunger travel	4 mm	4 mm	5.5 mm
Assured opening after plunger travel	2.5 mm	2.5 mm	
Switching actuating force on plunger	min. 15 N	min. 30 N	min. 20 N
Switching frequency	max. 300/min	max. 160/min	max. 300/min
Approach speed	Plunger D: 40 m/min Plunger K: 10 m/min Plunger R: 60 m/min Plunger L: 120 m/min	Plunger D: 40 m/min Plunger K: 10 m/min Plunger R: 60 m/min Plunger L: 80 m/min	Plunger D: 40 m/min Plunger K: 10 m/min Plunger R: 60 m/min Plunger L: 120 m/min
Repeatability	Plunger D, K: ± 0.002 mm Plunger R, L: ± 0.01 mm	Plunger D, K: ± 0.02 mm Plunger R, L: ± 0.02 mm	Plunger D, K: ± 0.002 mm Plunger R, L: ± 0.01 mm

Installation

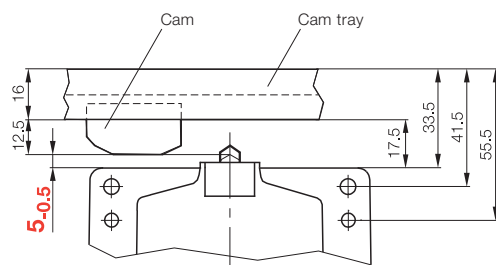

Note!
To ensure switching function, the dimension 5-0.5 is especially critical.

1.4

Multiple position switches series

100
61

Quick-change block for series

100
61

5.1

5.2

5.3



Multiple position switches for standard applications with quick-change plunger block

- Dual-chamber system with IP 67 protection: wear-free membrane with hermetic sealing from plunger mechanism and switch chamber
- Maintenance-free, self-lubricating plunger guide with slide bearing

Connection options

- Thread for cable gland M20×1.5 on side and in flange (seals and plugs included)
- Connector (note permissible operating voltage for the connectors, see page 132).

Multiple position switches with function indication

- Function indication for dual voltage range option

Available sizes

No. of plungers	Plunger spacing	Housing B Standard		Housing B		Housing C		Number of connectors S80 without	Number of connectors S80 with	Number of connectors S90 without	Number of connectors S90 with	Number of connectors S4 without	Number of connectors S4 with
	Dimension l ₁	Dimension l ₂	Dimension l ₃	Dimension l ₂	Dimension l ₃	Dimension l ₂	Dimension l ₃	FD/FE	FD/FE	FD/FE	FD/FE	FD (IO-Link)	FD (IO-Link)
2	12	36	12	60	30	48	24	1	1	1	1	1	1
						60	30						
3	12	48	12	60	24	60	24	1	2	1	1	1	1
4	12	60	12					2	2	1	1	1	1
5	12	72	12					2	3	1	1	1	1
6	12	84	12					2	3	1	1	1	1
2	16	48	16	60	30	60	30	1	1	1	1	1	1
3	16	72	16					1	2	1	1	1	1
4	16	84	16					2	2	1	1	1	1

Dimensions in mm

Ordering example:

BNS 829-B02-D12-61-12-10-FD-S80R

BNS 829- - - **-61-** - **-10-** - -

Housing style

- B** Standard
2× M20×1.5
on side
- B** 3× M20×1.5
on side and in
flange
- C** 2× M20×1.5
on side and
cable entry
in flange

No. of plungers

- 02** 2×
03 3×
04 4×
...

Plunger style

- D** Chisel
K Ball
R Roller
L Roller bearing

Plunger spacing

- 12** 12 mm
16 16 mm

Distance l₃


- 12** 12 mm
16 16 mm
24 24 mm
30 30 mm

optional Function indicator

- FD** 6...60
V AC/DC
FE 90...250
V AC/DC

optional Connector

- S80R** 5-pin, right
S80L 5-pin, left
S80S 5-pin,
right and left
S90R 12-pin, right
S90L 12-pin, left
S90S 12-pin,
right and left
S4R-I 4-pin, right
only for IO-Link
S4L-I 4-pin, left
only for IO-Link




Mechanical Multiple Position Switches with Quick-Change Plunger Unit

Series 61

Type	Multiple position switch
Plunger spacing	12 mm or 16 mm

CE

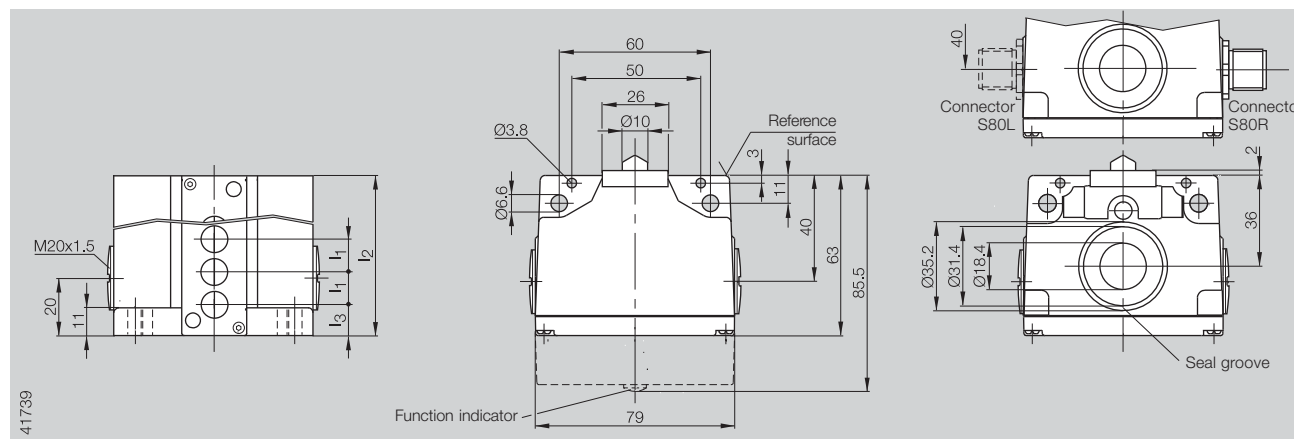

Plunger style	Chisel (D), Ball (K), Roller (R) Roller Bearing (L)
Plunger material	Stainless steel, contact surfaces induction hardened
Housing material	Cast aluminum, corrosion-resistant, anodized finish
Connection type	M20x1.5 for connector or cable gland
Ambient temperature range	-5...+85 °C
Degree of protection per IEC 60529	IP 67
Function indicator	LED 6...60 V AC/DC (FD) or 90...250 V AC/DC (FE)



IO-Link

For additional information
see IO-Link brochure!


With switch element

Ordering code

Wiring diagram, style

BSE 30.0

BNS 829- - -61- -10- -




Switch element

Contact material	Silver, gold plated
Switching principle	Snap switch
Contact system	Dual changeover, one normally-open and one normally-closed, galvanically isolated
Electrical data	see page 116
Approval	UL, CSA, CCC

Mechanical data

Plunger point to reference surface	8 mm
Switchpoint to reference surface	6 mm
Maximum plunger travel	5.5 mm
Switching actuating force on plunger	min. 20 N
Switching frequency	max. 300/min
Approach speed	Plunger D 40 m/min
	Plunger K 10 m/min
	Plunger R 60 m/min
	Plunger L 120 m/min
Repeatability	Plunger D, K ± 0.002 mm
	Plunger R, L ± 0.01 mm

Installation

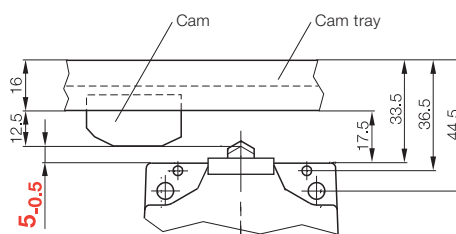

Note!

To ensure switching function, the dimension 5.0.5 is especially critical.

1.4

Multiple
position
switches
series

100

61

Quick-
change block
for series

100

61

5.1

5.2

5.3



Multiple position switches with safety switch positions per DIN EN 60204-1/VDE 0113 and quick-change plunger unit

- Positive-opening contacts and rigid plungers for additional security per DIN EN 60204-1/VDE 0113

- Dual-chamber system with IP 67 protection: wear-free membrane with hermetic sealing from plunger mechanism and switch chamber
- Maintenance-free, self-lubricating plunger guide with slide bearing

Connection options

- Thread for cable gland M20×1.5 on side and in flange (seals and plugs included)
- Connector (note permissible operating voltage for the connectors, see page 132).

Multiple position switches with function indication


- Function indication for selectable three voltage ranges

Available sizes

No. of plungers	Plunger spacing dimension	Housing B standard dimension		Housing B dimension		Housing C dimension		Number of connectors* S80 without FD/FE	Number of connectors* S80 with FD/FE	Number of connectors* S90 without FD/FE	Number of connectors* S90 with FD/FE
	l_1	l_2	l_3	l_2	l_3	l_2	l_3				
2	12	36	12	60	30	48	24	1	1	1	1
						60	30				
3	12	48	12	60	24	60	24	1	2	1	1
4	12	60	12					2	2	1	1
5	12	72	12					2	3	1	1
6	12	84	12					2	3	1	1
2	16	48	16	60	30	60	30	1	1	1	1
3	16	72	16					1	2	1	1
4	16	84	16					2	2	1	1

Dimensions in mm

*Number of connectors with BSE 85 on request.



Ordering example:

BNS 823-B02-K12-61-A-12-02-FE-S80R

BNS 823- - - - -61- - - - -


Housing style	No. of plungers	Plunger style	Plunger spacing	Distance l_3	Switch elements	Safety switch elements	optional Function indication	optional Connector
B Standard 2× M20×1.5 on side	02 2× 03 3× 04 4× ...	D Chisel K Ball R Roller L Roller bearing	12 12 mm 16 16 mm	A 12 mm B 16 mm C 24 mm D 30 mm	10 BSE 61 Remaining switch positions BSE 30.0 12 only BSE 61 20 BSE 85 Remaining switch positions BSE 30.0 22 only BSE 85	No. from flange	FD 6...60 V AC/DC (for BSE 30.0 and BSE 61) FE 90...250 V AC/DC (for BSE 30.0 and BSE 61) FC 24...28 V DC (only for BSE 85)	S80R 5-pin, right S80L 5-pin, left S80S 5-pin, right and left S90R 12-pin, right S90L 12-pin, left S90S 12-pin, right and left



Mechanical Multiple Position Switches with Quick-Change Plunger Unit

Series 61

Type	Multiple position switch with forced-opening contacts
Plunger spacing	12 mm or 16 mm

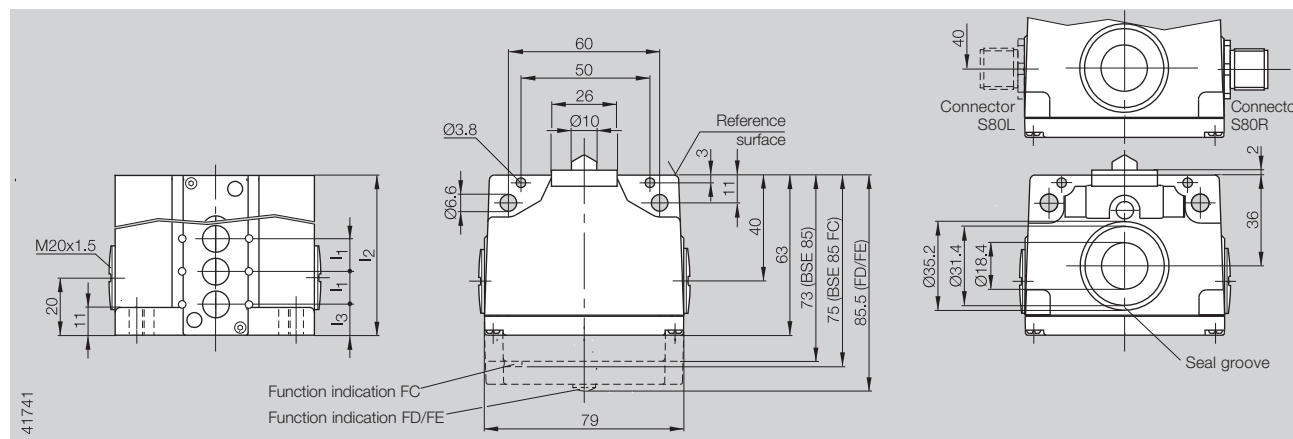

Plunger style	Chisel (D), Ball (K), Roller (R) Roller Bearing (L)
Plunger material	Stainless steel, contact surfaces induction hardened
Housing material	Cast aluminum, corrosion-resistant, anodized finish
Connection type	M20x1.5 for connector or cable gland
Ambient temperature range	-5...+85 °C
Degree of protection per IEC 60529	IP 67
Function indicator	LED 6...60 V AC/DC (FD), 90...250 V AC/DC (FE) or 24...28 V DC (FC)

With switch element

	BSE 61 per DIN EN 60204-1/VDE 0113	BSE 85 per DIN EN 60204-1/VDE 0113	BSE 30.0
Ordering code	BNS 823- - - -61-1- - -	BNS 823- - - -61-2- - -	BNS 823- - - -61-0- - -
Wiring diagram, style			


Switch element

Contact material	Silver	Silver	Silver, gold plated
Switching principle	Creep switch, positive-opening	Snap switch, forced-opening (normally-closed)	Snap switch
Contact system	Normally-closed, double interruption	Dual-changeover: 1. NO (snap function), 2. Forced-opening (double-interruption), all galvanically isolated	Dual changeover, one normally-open and one normally-closed, galvanically isolated
Electrical data	see page 116	see page 116	see page 116
Approval	CSA, CCC	cULus, CSA, CCC	UL, CSA, CCC

Mechanical data

Plunger point to reference surface	8 mm	8 mm	8 mm
Switchpoint to reference surface	7 mm	6.5 mm	6 mm
Maximum plunger travel	4 mm	4 mm	5.5 mm
Assured opening after plunger travel	2.5 mm	2.5 mm	
Switching actuating force on plunger	min. 15 N	min. 30 N	min. 20 N
Switching frequency	max. 300/min	max. 160/min	max. 300/min
Approach speed	Plunger D: 40 m/min Plunger K: 10 m/min Plunger R: 60 m/min Plunger L: 120 m/min	Plunger D: 40 m/min Plunger K: 10 m/min Plunger R: 60 m/min Plunger L: 80 m/min	Plunger D: 40 m/min Plunger K: 10 m/min Plunger R: 60 m/min Plunger L: 120 m/min
Repeatability	Plunger D, K: ± 0.002 mm Plunger R, L: ± 0.01 mm	Plunger D, K: ± 0.02 mm Plunger R, L: ± 0.02 mm	Plunger D, K: ± 0.002 mm Plunger R, L: ± 0.01 mm

Installation

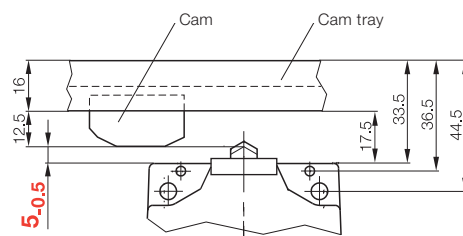

Note!

To ensure switching function, the dimension 5.0.5 is especially critical.

1.4

Multiple position switches series

100

61

Quick-change block for series

100

61

5.1

5.2


5.3



Mechanical
Multiple Position Switches with
Quick-Change Plunger Unit

Quick-change block
for Series 100

Type	BNP quick-change block/Plunger
Plunger spacing	12 mm or 16 mm

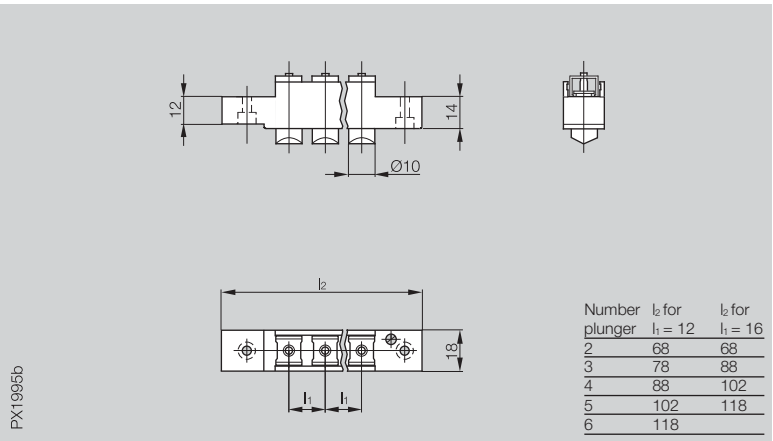

Ordering code	BNP 2 _ _ _ -100
Plunger style	Chisel (D), Ball (K), Roller (R) or Roller Bearing (L)
Plunger material	Stainless steel, contact surfaces induction hardened
Cam tray material	aluminum, barrel finished, blue anodized finish

Ordering example for standard application:
BNP 29-04-D12-100

BNP 29- - -100			
No. of plungers	Plunger style	Plunger spacing l ₁	
02 2×	D Chisel	12 12 mm	
...	K Ball	16 16 mm	
06 6×	R Roller		
	L Roller bearing		

Ordering example for safety application:
BNP 23-04-D12-100-01

BNP 23- - -100-				
No. of plungers	Plunger style	Plunger spacing l ₁	Safety switch elements	
02 2×	D Chisel	12 12 mm	No. from flange	
...	K Ball	16 16 mm		
06 6×	R Roller			
	L Roller bearing			

Note!

Safety switch positions
to DIN EN 60204-1/
VDE 0113 may only be
operated with a rigid
plunger.



Mechanical Multiple Position Switches with Quick-Change Plunger Unit

Quick-change block
for Series 61

Type	BNP quick-change block/Plunger
Plunger spacing	12 mm or 16 mm




Technical drawing of a quick-change block (PX2356a) showing dimensions l_3 , 6.5, and $\varnothing 10$.


Technical drawing of a plunger showing dimension l_3 .

Technical drawing of a quick-change block (PX2356a) showing dimensions l_2 , 26, and l_1 .

Number of plungers	Plungers spacing	Housing B standard	Housing B see p. 74	Housing C			
	l_1	l_2	l_3	l_2	l_3		
2	12	35	12	59	30	47	24
3	12	47	12	59	24		
4	12	59	12				
5	12	71	12				
6	12	83	12				
2	16	47	16	59	30		
3	16	71	16				
4	16	83	16				

PX2356a

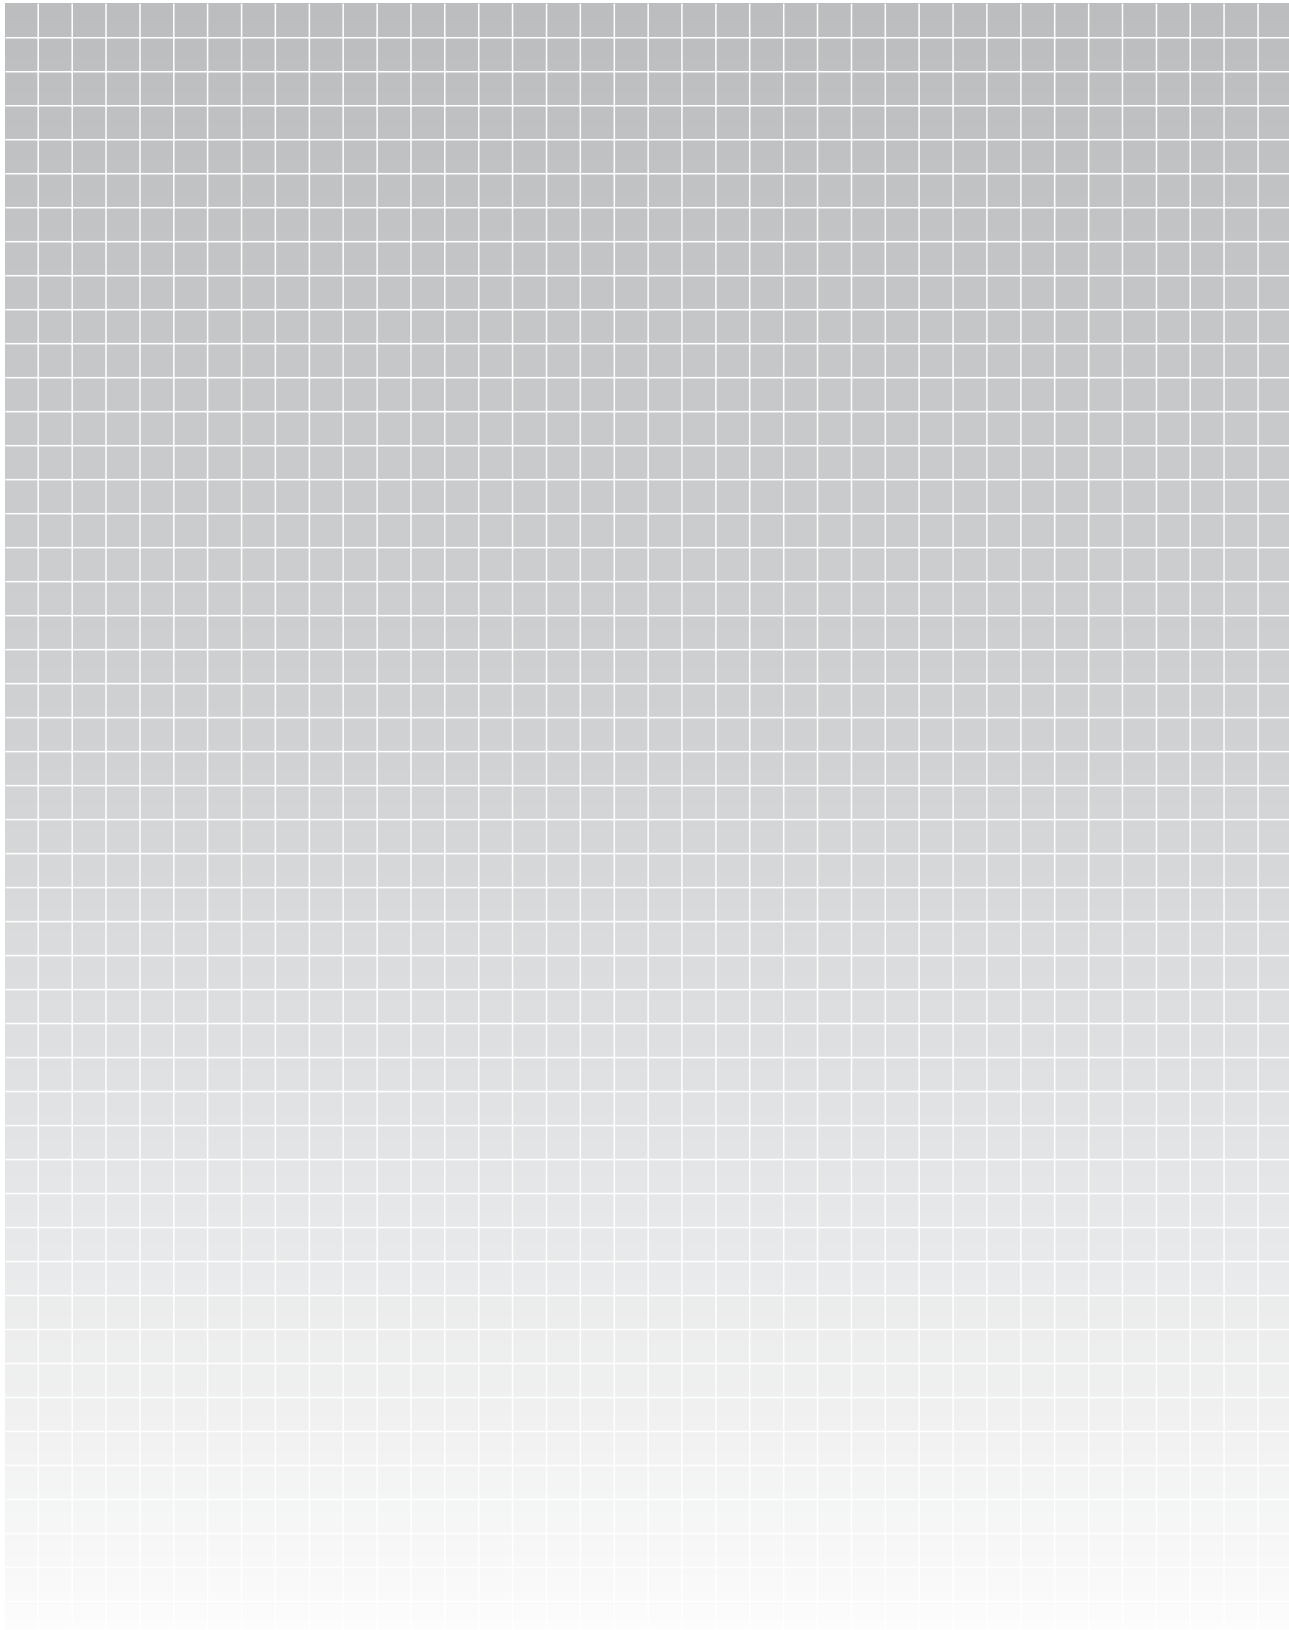

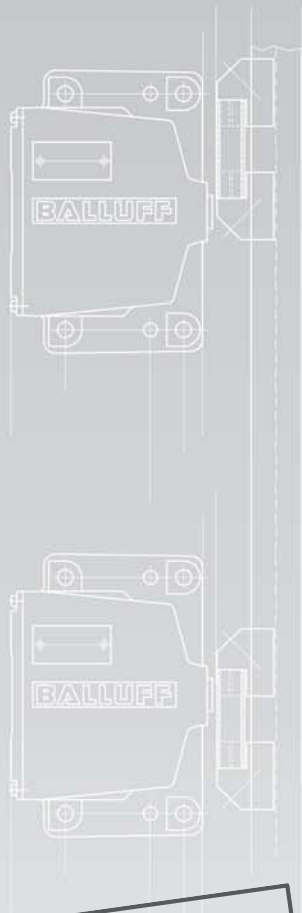

more added value

- Long service life
- Non-contacting, wear-free,
- Compatible with mechanical switches

Inductive multiple position switches

80	Series 602-11 per DIN 43697
82	Series 610-11 Series 611-11 Series 612-11 Series 613-11
84	Series 605-11
86	Series 603-11
88	Series 650-11

Inductive single position switches

90	Series H2 and H3
92	DC connectors M12 connection (S4) for Series H2
93	DC connectors M8 connection (S49) for Series H2

2.1

Multiple position switches series

602-11
610-11
611-11
612-11
613-11
605-11
603-11
650-11

Single position switches series
H2 and H3

5.1

5.2

5.3



Multiple position switches per DIN 43697 for standard applications

- Can be used under extreme conditions such as shock, temperature fluctuations and coolant flooding
- Reliability comparable with inductive sensors

Multiple position switches with function indication

- The inductive switch elements are equipped standard with an LED. The light is highly visible on the housing cover.

Connection options


- Thread for cable gland M25×1.5 on side and in flange (Gaskets and plugs included)
- Connector (note permissible operating voltage for the connectors, see page 132).

Available sizes

Number of switch positions	2	3	4	5	6	8	10	12
Dimension $l_1 = 12$ mm	70	80	90	105	120	140	170	200
Dimension l_4	88	88	88	88	88	80	80	80
Dimension l_5	14	14	14	14	14	20	20	20
Dimension $l_1 = 16$ mm	70	90	105	120	140	170	200	240
Dimension l_4	88	88	88	88	80	80	80	80
Dimension l_5	14	14	14	14	20	20	20	20

Number of connectors	S80	on request
	S90	on request
Dimension l_3	4 mm for inductive switch elements with sensing head $\varnothing$ 10 mm	
	2 mm for inductive switch elements with sensing head $\varnothing$ 15.5 mm	

Dimensions in mm



Ordering example:

BNS 816-B12-THA-16-602-11-S80R

BNS 816-B - - -602-11-

**No. of
switch
positions**

02 2x
03 3x
04 4x
...

**Code for
switch
elements**

(see table at right)

**Plunger
spacing**


12 12 mm
16 16 mm

**optional
Connector**

S80R 5-pin, right
S80L 5-pin, left
S80S 5-pin, right and left
S90R 12-pin, right
S90L 12-pin, left
S90S 12-pin, right and left



Type	Multiple position switch
Switch position spacing	12 mm or 16 mm
Mounting and function dimensions	per DIN 43697

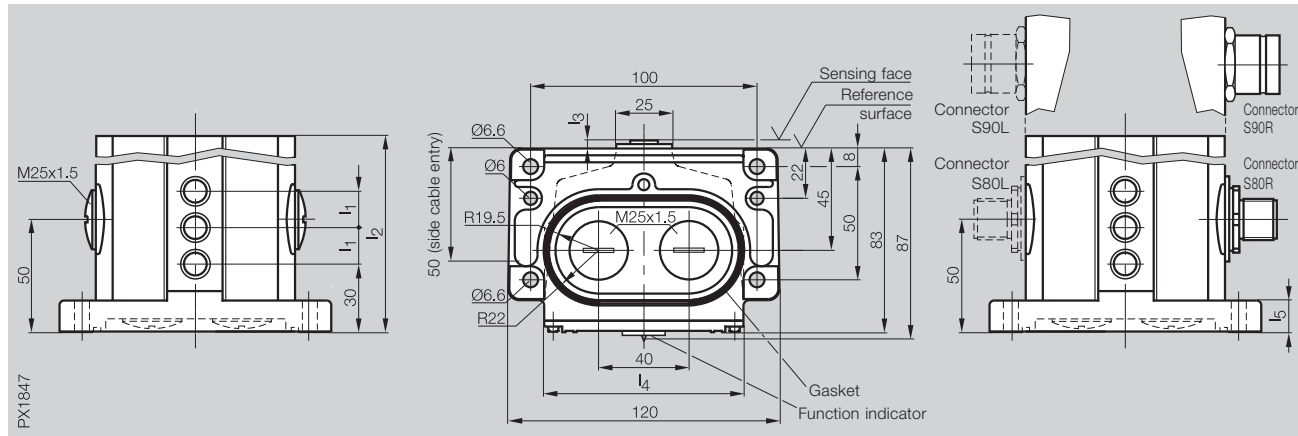

Ordering code	BNS 816-B _ _ _ _ -602-11- _ _ _
Housing material	Cast aluminum, corrosion-resistant, anodized finish
Connection type	M25x1.5 for connector or cable gland
Ambient temperature range	-25...+70 °C
Degree of protection per IEC 60529	IP 67
Function indicator	LED

Inductive switch elements with sensing head Ø 10 mm, for use with switch position spacing 12 and 16 mm

Code	Ordering code for replacement switch elements	Electrical version	Rated operating distance s_n	Assured operating distance s_a
PA	BES 517-110	PNP, complementary, 10...60 V DC, short circuit protected	2 mm	0...1.6 mm
NA	BES 517-108	NPN, complementary, 10...60 V DC, short circuit protected	2 mm	0...1.6 mm
WS	BES 517-410	NO, up to 250 V AC	2 mm	0...1.6 mm
WO	BES 517-421	NC, up to 250 V AC	2 mm	0...1.6 mm
KHG	BES 517-560-H	2-wire, NO, 10...55 V DC, short circuit protected	2 mm	0...1.6 mm
KHH	BES 517-561-H	2-wire, NC, 10...55 V DC, short circuit protected	2 mm	0...1.6 mm
NG	BES 516-314-N	2-wire, NAMUR, 7.7... 9 V DC	2 mm	0...1.6 mm

Inductive switch elements with sensing head Ø 15.5 mm, for use with switch position spacing 16 mm

Code	Ordering code for replacement switch elements	Electrical version	Rated operating distance s_n	Assured operating distance s_a
THA	BES 517-142-Y	PNP, complementary, 10...30 V DC, short circuit protected	5 mm	0...4 mm
EJA	BES 517-463	NO, up to 250 V AC	5 mm	0...4 mm
AAA	BES 517-464	NC, up to 250 V AC	5 mm	0...4 mm


Hybrid switch element with sensing head 15.5 mm, for use with switch position spacing 16 mm

Code	Ordering code for replacement switch elements	Electrical version	Additional information on request!
DH	BES 516-110-D	PNP, complementary, 10...30 V DC	



For additional electrical data see pages 118 to 121.



Installation

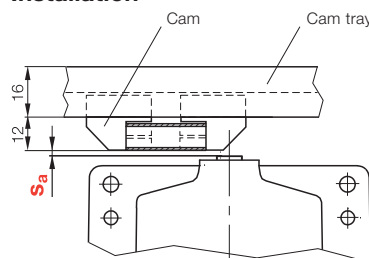

Note!
To ensure switching function s_a must be in a range of $0 < s_a \leq 0.81 s_n$.



Inductive Multiple Position Switches

Series
610-11, 611-11,
612-11, 613-11

Multiple position switches for standard applications

- Can be used under extreme conditions such as shock, temperature fluctuations and coolant flooding
- Reliability comparable with inductive sensors

Multiple position switches with function indication

- The inductive switch elements are equipped standard with an LED. The light is highly visible on the housing cover.

Connection options

- Thread for cable gland M20×1.5 on side and in flange (seals and plugs included)
- Connector (note permissible operating voltage for the connectors, see page 132).


Available sizes

No. of Switch positions	No. of connectors S80/S90	Switch position spacing Dimension	Series 610 Housing B Standard Dimension	Series 611 Housing B Standard Dimension	Series 612 Housing B Dimension	Series 612 housing C Dimension	Series 613 Housing B Dimension	Series 613 housing C Dimension
		l_1	l_2 l_3	l_2 l_3	l_2 l_3	l_2 l_3	l_2 l_3	l_2 l_3
2	on request	12	36 12			48 24	60 30	60 30
3		12	48 12		60 24	60 24		
4		12	60 12					
5		12	72 12					
6		12	84 12					
2		16		48 16			60 30	60 30
3		16		72 16				
4		16		84 16				

Dimensions in mm

Dimension l_4 = 4 mm for inductive switch elements with sensing head Ø 10 mm

Dimension l_4 = 2 mm for inductive switch elements with sensing head Ø 15.5 mm

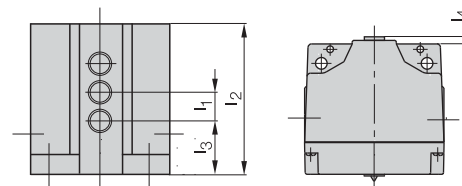

Ordering example:

BNS 816-B04-KHG-12-610-11-S80R

BNS 816- - - - - **-11-**

Housing style	No. of switch positions	Code for switch elements	Plunger spacing	Distance l_3	optional Connector
B Standard 2× M20×1.5 on side	02 2× 03 3× 04 4× ...	(see table at right)	12 12 mm 16 16 mm	610 12 mm 611 16 mm 612 24 mm 613 30 mm	S80R 5-pin, right S80L 5-pin, left S80S 5-pin, right and left S90R 12-pin, right S90L 12-pin, left S90S 12-pin, right and left
B 3× M20×1.5 on side and in flange					
C 2× M20×1.5 on side and cable entry in flange					



Series
610-11, 611-11,
612-11, 613-11

CE



2.1

602-11

602-11

610-11

011 11

611-11

612-11

613-11

605-11

005-11
000-11

603-11

650-11

Single position
switches
series

H2 and H3

5.1

5.2

5.3



Code	Ordering code for replacement switch elements	Electrical version	
DH	BES 516-110-D	PNP, complementary, 10...30 V DC	Additional information on request!

For additional electrical data see pages 118 to 121.



To ensure switching function s_a must be in a range of $0 < s_a \leq 0.81 s_n$.

Multiple position switches for standard applications

- Can be used under extreme conditions such as shock, temperature fluctuations and coolant flooding
- Reliability comparable with inductive sensors


Multiple position switches with function indication

- The inductive switch elements are equipped standard with an LED. The light is highly visible on the housing cover.

Connection options

- Thread for cable gland M25×1.5 on side and in flange (Gaskets and plugs included)
- Connector (note permissible operating voltage for the connectors, see page 132).

Available sizes



Number of switch positions	2	3	4	5	6	7	8	10	12
Dimension l ₂ for l ₁ = 12 mm	84	84	100	116	132	148	164	180	
Dimension l ₃ for l ₁ = 12 mm	66	66	82	98	114	130	146	162	
Dimension l ₄ for l ₁ = 12 mm	54	54	68	84	100	116	132	148	
Dimension l ₂ for l ₁ = 16 mm	84	100	116	132	148	164	180	212	244
Dimension l ₃ for l ₁ = 16 mm	66	82	98	114	130	146	162	194	226
Dimension l ₄ for l ₁ = 16 mm	54	68	84	100	116	132	148	180	212
Number of connectors	S80	on request							
	S90	on request							

Dimensions when using inductive switch elements with sensing head Ø 10 mm

Dimension l₅ 10 mm

Dimension l₆ 40 mm

Dimension l₇ 43.5 mm


Dimensions when using inductive switch elements with sensing head Ø 15.5 mm

Dimension l₅ 8 mm

Dimension l₆ 38 mm

Dimension l₇ 41.5 mm

Dimensions in mm



Ordering example:

BNS 816-B10-THA-12-605-11-S80R

BNS 816-B - - - - - **-605-11-** - - -

No. of switch positions

02 2×
03 3×
04 4×
...

Code for switch elements

(see table at right)

Plunger spacing

12 12 mm
16 16 mm


optional Connector

S80R 5-pin, right
S80L 5-pin, left
S80S 5-pin, right and left
S90R 12-pin, right
S90L 12-pin, left
S90S 12-pin, right and left



**Not for new applications.
Still available for replacements.**

Type	Multiple position switch
Switch position spacing	12 mm or 16 mm

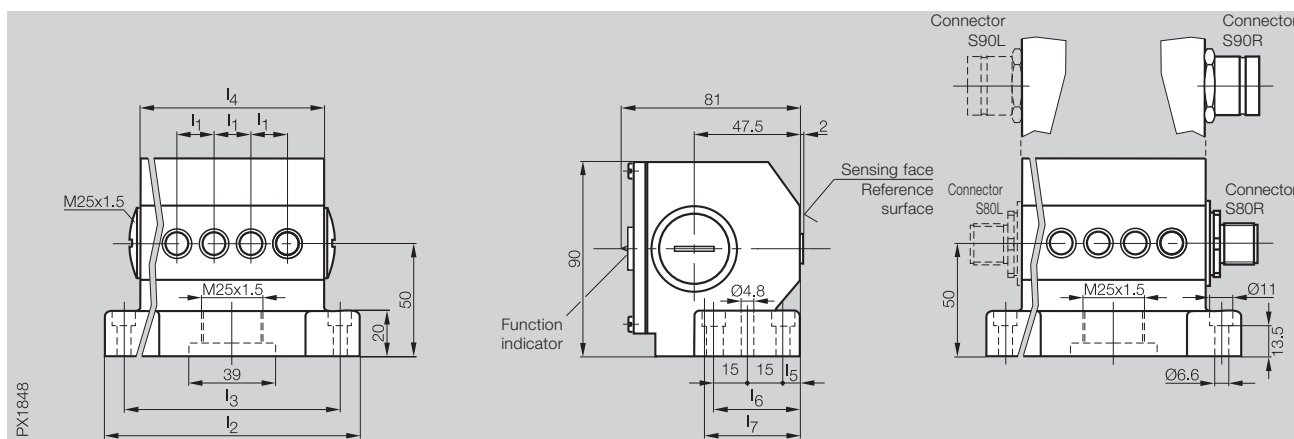

Ordering code	BNS 816-B_-_-_-_-_-605-11-_-_-
Housing material	Cast aluminum, corrosion-resistant, anodized finish
Connection type	M25×1.5 for connector or cable gland
Ambient temperature range	-25...+70 °C
Degree of protection per IEC 60529	IP 67
Function indicator	LED

Inductive switch elements with sensing head $\varnothing$ 10 mm, for use with switch position spacing 12 and 16 mm

Code	Ordering code for replacement switch elements	Electrical version	Rated operating distance s_n	Assured operating distance s_a
PA	BES 517-110	PNP, complementary, 10...60 V DC, short circuit protected	2 mm	0...1.6 mm
NA	BES 517-108	NPN, complementary, 10...60 V DC, short circuit protected	2 mm	0...1.6 mm
WS	BES 517-410	NO, up to 250 V AC	2 mm	0...1.6 mm
WO	BES 517-421	NC, up to 250 V AC	2 mm	0...1.6 mm
KHG	BES 517-560-H	2-wire, NO, 10...55 V DC, short circuit protected	2 mm	0...1.6 mm
KHH	BES 517-561-H	2-wire, NC, 10...55 V DC, short circuit protected	2 mm	0...1.6 mm
NG	BES 516-314-N	2-wire, NAMUR, 7.7... 9 V DC	2 mm	0...1.6 mm

Inductive switch elements with sensing head $\varnothing$ 15.5 mm, for use with switch position spacing 16 mm

Code	Ordering code for replacement switch elements	Electrical version	Rated operating distance s_n	Assured operating distance s_a
THA	BES 517-142-Y	PNP, complementary, 10...30 V DC, short circuit protected	5 mm	0...4 mm
EJA	BES 517-463	NO, up to 250 V AC	5 mm	0...4 mm
AAA	BES 517-464	NC, up to 250 V AC	5 mm	0...4 mm


Hybrid switch element with sensing head 15.5 mm, for use with switch position spacing 16 mm

Code	Ordering code for replacement switch elements	Electrical version	
DH	BES 516-110-D	PNP, complementary, 10...30 V DC	Additional information on request!

For additional electrical data see pages 118 to 121.



Installation

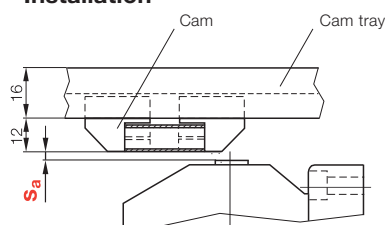

Note!

Note:
To ensure switching function s_a must be in a range of $0 < s_a \leq 0.81 s_n$.



Multiple position switches for standard applications


- Smallest plunger spacing for inductive multiple position switches (8 mm or 10 mm)
- Can be used under extreme conditions such as shock, temperature fluctuations and coolant flooding
- Reliability comparable with inductive sensors

Multiple position switches with function indication

- The inductive switch elements are equipped standard with an LED. The light is highly visible on the housing cover.

Connection options

- Thread for cable gland M16×1.5 on side and in flange (seals and plugs included)
- Connector (note permissible operating voltage for the connectors, see page 132).



Available sizes

Number of switch positions		2	3	4	5	6	8	10
Dimension l ₂ for	l ₁ = 8 mm	49	59	64	72	80	96	112
	l ₁ = 10 mm	49	59	72	80	89	112	129
Number of connectors	S80	on request						

Dimensions in mm

Size 12x with 8 mm spacing on request.

Ordering example:

BNS 816-B04-TOB-08-603-11-S80R

BNS 816-B - - -603-11-

**No. of
switch
positions**

02 2x
03 3x
04 4x
...

**Code for
switch
elements**

(see table at right)

**Plunger
spacing**


08 8 mm
10 10 mm

**optional
Connector**

S80R 5-pin, right
S80L 5-pin, left
S80S 5-pin, right and left



Type	Multiple position switch
Switch position spacing	8 mm or 10 mm

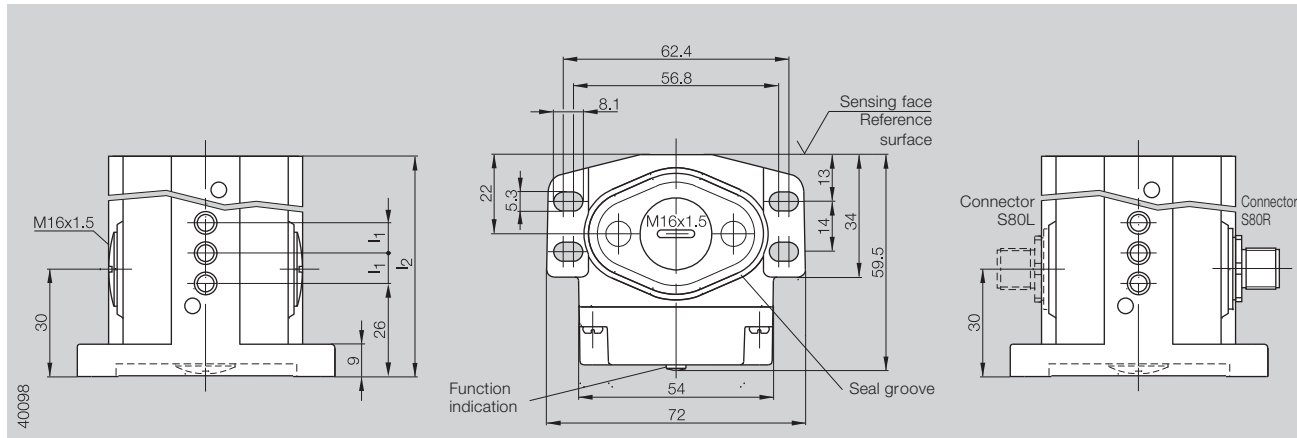

Ordering code	BNS 816-B _ _ _ _ -603-11- _ _
Housing material	Cast aluminum, corrosion-resistant, anodized finish
Connection type	M16x1.5 for cable gland or connector
Ambient temperature range	-25...+70 °C
Degree of protection per IEC 60529	IP 67
Function indicator	LED

Inductive switch elements

Code	Ordering code for replacement switch elements	Electrical version	Rated operating distance s_n	Assured operating distance s_a
TOB	BES 517-312-Y	PNP, NO, 10...30 V DC, short circuit protected	1.1 mm	0...0.9 mm
TNB	BES 517-311-Y	NPN, NO, 10...30 V DC, short circuit protected	1.1 mm	0...0.9 mm

For additional electrical data see page 118

2.1

Multiple
position
switches
series

602-11

610-11

611-11

612-11

613-11

605-11

603-11

650-11

Single position
switches
series

H2 and H3


5.1

5.2

5.3



Installation

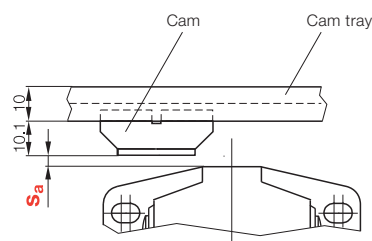

Note!

To ensure switching
function s_a must
be in a range of
 $0 < s_a \leq 0.81 s_n$.

Multiple position switches for standard applications


- Smallest plunger spacing for inductive multiple position switches (8 mm)
- Can be used under extreme conditions such as shock, temperature fluctuations and coolant flooding
- Reliability comparable with inductive sensors

Multiple position switches with function indicator

- The inductive switch elements are equipped standard with an LED. The light is highly visible on the housing cover.

Connection options

- Thread for cable gland M16×1.5 on side (Scope of delivery: Seals and cover screws)
- Connector (note permissible operating voltage for the connectors, see page 132).



Available sizes

Number of switch positions	2	3	4	5	6
Dimension l ₁	34	42	50	58	66
Number of connectors S80	on request				
Dimensions in mm					

Ordering example:

BNS 816-B04-TNB-08-650-11-S80R

BNS 816-B - - - -650-11- - - -

No. of switch positions

02 2×
03 3×
04 4×
...

Code for switch elements

(see table at right)

Plunger spacing


08 8 mm

optional Connector

S80R 5-pin, right
S80L 5-pin, left
S80S 5-pin, right and left



Type	Multiple position switch
Switch position spacing	8 mm

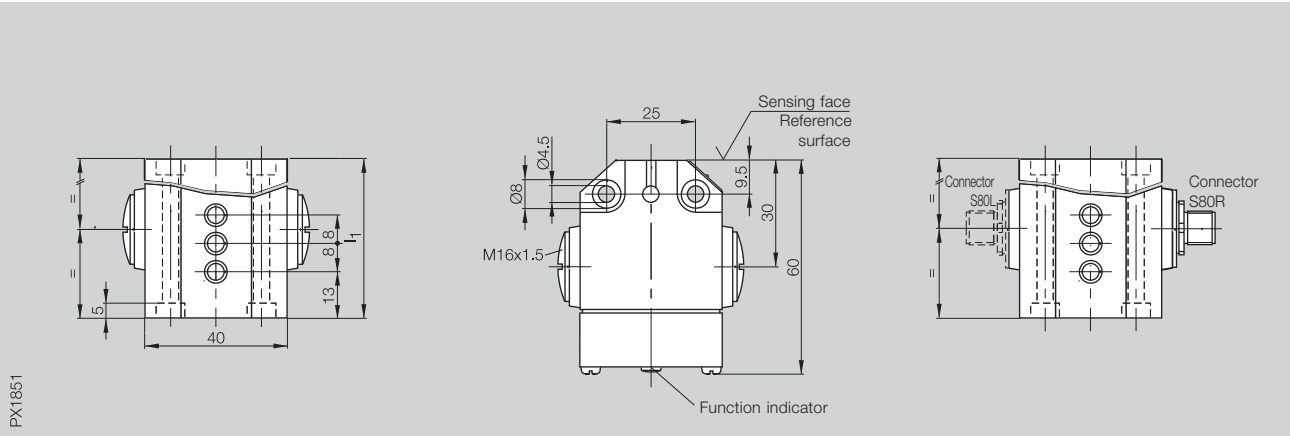

Ordering code	BNS 816-B _ _ _ _ -650-11- _ _
Housing material	Cast aluminum, corrosion-resistant, anodized finish
Connection type	M16x1.5 for cable gland or connector
Ambient temperature range	-25...+70 °C
Degree of protection per IEC 60529	IP 67
Function indicator	LED

Inductive switch elements

Code	Ordering code for replacement switch elements	Electrical version	Rated operating distance s_n	Assured operating distance s_a
TOB	BES 517-312-Y	PNP, NO, 10...30 V DC, short circuit protected	1.1 mm	0...0.9 mm
TNB	BES 517-311-Y	NPN, NO, 10...30 V DC, short circuit protected	1.1 mm	0...0.9 mm

For additional electrical data see page 118

2.1

Multiple position switches series

602-11
610-11
611-11
612-11
613-11
605-11
603-11


650-11

Single position switches series
H2 and H3


5.1

5.2

5.3



Installation

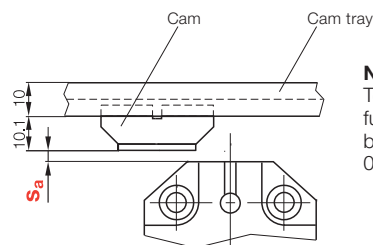

Note!

To ensure switching function s_a must be in a range of $0 < s_a \leq 0.81 s_n$.


These series offer the combined advantages of the inductive system with the benefits of our mechanical housing series for position switches.

The basis for all electrical versions is the wide variety of tubular sensors.

Features

- Reliable inductive operating principle
- All switches equipped with LEDs
- The mounting dimensions of standardized mechanical housing styles can be used
- Simple combination with bus-compatible systems using customer-specific connectors

Wiring diagrams

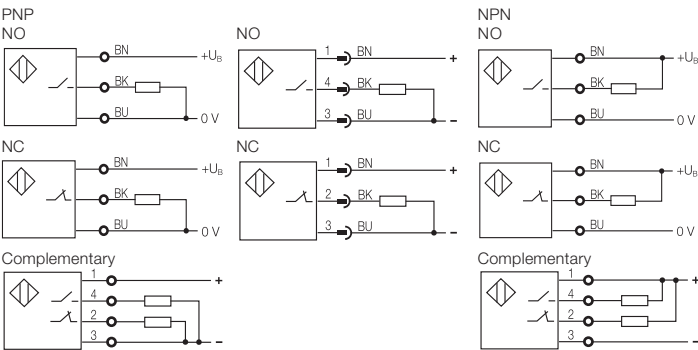

Housing size	
Mounting	
Rated operating distance s_n	
Assured operating distance s_a	



PNP	NO	
	NC	
	Complementary	

NPN	NO	
	NC	
	Complementary	


Supply voltage U_B	
Voltage drop U_d at I_e	
Rated insulation voltage U_i	
Rated operational current I_e	
No-load supply current I_o max.	
Polarity reversal protected	
Short circuit protected	

Repeat accuracy R	
Ambient temperature range T_a	
Switching frequency f	
Utilization category	
Function indicator	

Degree of protection per IEC 60529	
------------------------------------	--





Housing material	
Material of sensing face	
Connection type	
max. conductor cross-section	

Recommended connector	
See next page for connectors	

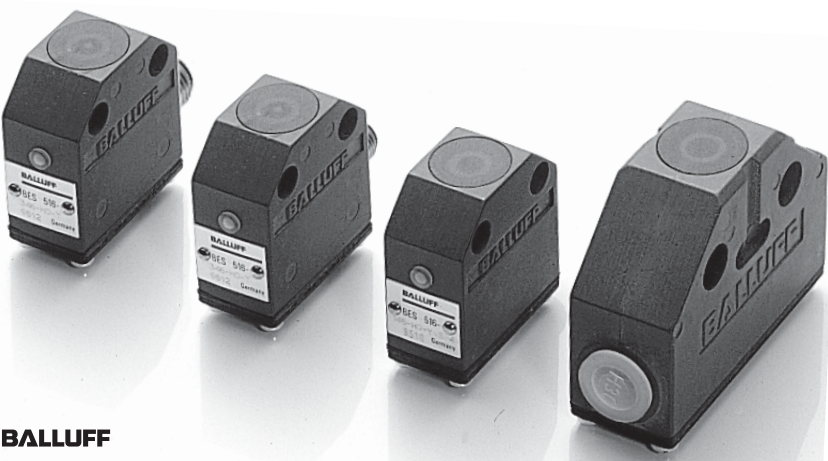

Inductive Single Position Switches

Series H2 and H3

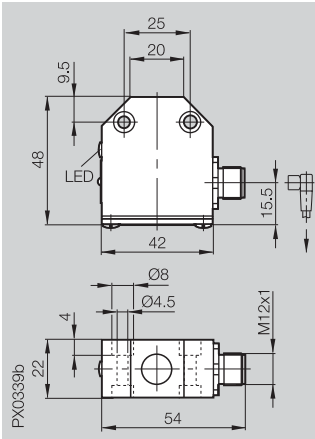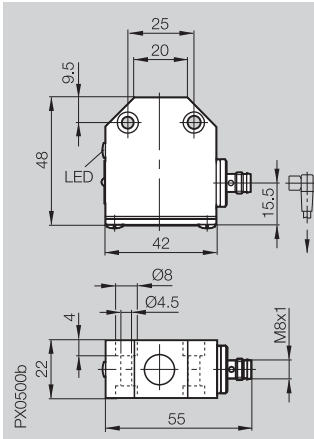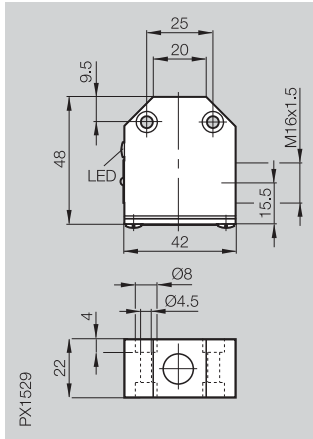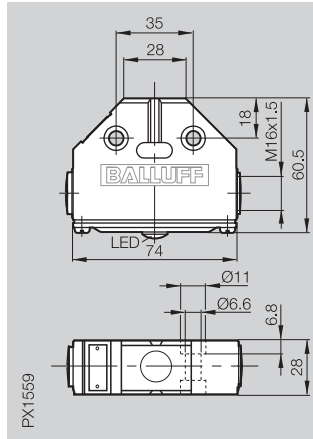42×48×22 mm	42×48×22 mm	42×48×22 mm	74×60.5×28 mm
Flush	Flush	Flush	Flush
5 mm	5 mm	5 mm	7 mm
0...4.1 mm	0...4.1 mm	0...4.1 mm	0...5.7 mm
			
BES 516-346-H2-Y-S4 BES 516-341-H2-Y-S4	BES 516-346-H2-Y-S49	BES 516-346-H2-Y BES 516-341-H2-Y	BES 516-161-H3-L
		BES 516-344-H2-Y BES 516-340-H2-Y	BES 516-160-H3-L
10...30 V DC	10...30 V DC	10...30 V DC	10...30 V DC
≤ 3.5 V	≤ 3.5 V	≤ 3.5 V	≤ 1.5 V
75 V DC	75 V DC	75 V DC	75 V DC
130 mA	130 mA	130 mA	400 mA
≤ 25 mA	≤ 25 mA	≤ 25 mA	≤ 30 mA
yes	yes	yes	yes
yes	yes	yes	no
≤ 5 %	≤ 5 %	≤ 5 %	≤ 5 %
-25...+70 °C	-25...+70 °C	-25...+70 °C	-25...+70 °C
500 Hz	500 Hz	500 Hz	300 Hz
DC 13	DC 13	DC 13	DC 13
yes	yes	yes	yes
IP 67	IP 67	IP 67	IP 67
Anodized GD-Al PA 12	Anodized GD-Al PA 12	Anodized GD-Al PA 12	Anodized GD-Al PA 12
Connectors	Connectors	Screw terminals up to 2.5 mm²	Screw terminals up to 2.5 mm²
BKS- _ 19/BKS- _ 20	BKS- _ 48/BKS- _ 49		

2.1

Multiple
position
switches
series

602-11
610-11
611-11
612-11
613-11
605-11
603-11
650-11

Single position
switches
series

H2 and H3

5.1

5.2









5.3











Inductive Single Position Switches


DC connectors
M12 connection (S4)
for Series H2

M12

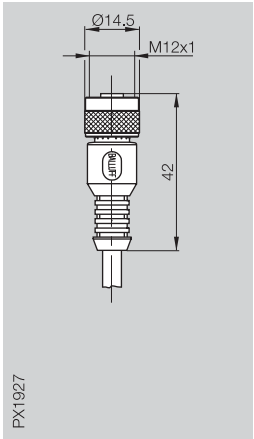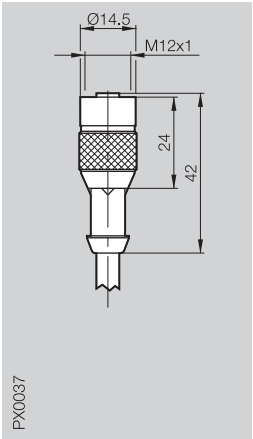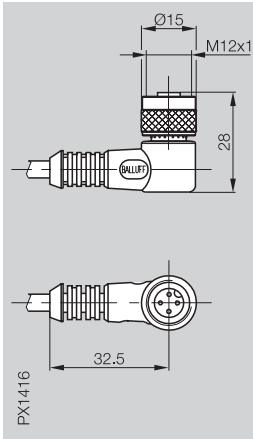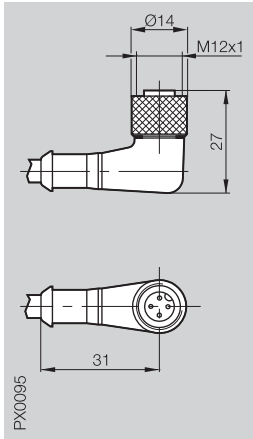Connector Version	BKS-B 19 Straight female	BKS-S 19 Straight female	BKS-B 20 Right angle female	BKS-S 20 Right angle female	
Use	Position switch S4	Position switch S4	Position switch S4	Position switch S4	
   					
no LED, NO	BKS-B 19-1-03	BKS-S 19-1-PU-03	BKS-B 20-1-03	BKS-S 20-1-PU-03	
no LED, NC				BKS-S 20-2-PU-05	
no LED, NC or NO					
with 2 LED's, NO PNP	BKS-B 19-4-05	BKS-S 19-4-PU-03	BKS-B 20-4-03	BKS-S 20-4-PU-03	
with 2 LED's, NC PNP				BKS-S 20-5-PU-03	
with LED, NC or NO PNP					
Supply voltage U_B	10...30 V DC	10...30 V DC	10...30 V DC	10...30 V DC	
Cable	3 m/5 m molded PVC	3 m molded PUR	3 m molded PVC	3 m/5 m molded PUR	
No. of wires × cross-section	3×0.34 mm ²	3×0.34 mm ²	3×0.34 mm ²	3×0.34 mm ²	
Degree of protection per IEC 60529	IP 67	IP 68 per BWN Pr. 20	IP 67	IP 68 per BWN Pr. 20	
Ambient temperature range T_a	-25...+85 °C	-25...+70 °C	-25...+85 °C	-25...+70 °C	
View of female side					

Other cable lengths and qualities on request.

BKS-B 48 Straight female		BKS-S 48 Straight female		BKS-B 49 Right angle female		BKS-S 49 Right angle female	
Position switch S49		Position switch S49		Position switch S49		Position switch S49	
 PX1600		 PX0240		 PX1601		 PX0196	
BKS-B 48-1-03		BKS-S 48-1-03		BKS-B 49-1-03		BKS-S 49-1-PU-03	
10...30 V DC		10...30 V DC		10...30 V DC		10...30 V DC	
3 m molded PVC		3 m molded PVC		3 m molded PVC		3 m molded PUR	
3×0.25 mm ²		3×0.34 mm ²		3×0.25 mm ²		3×0.34 mm ²	
IP 67		IP 67		IP 67		IP 67	
-20...+85 °C		-25...+90 °C		-20...+85 °C		-25...+90 °C	
							

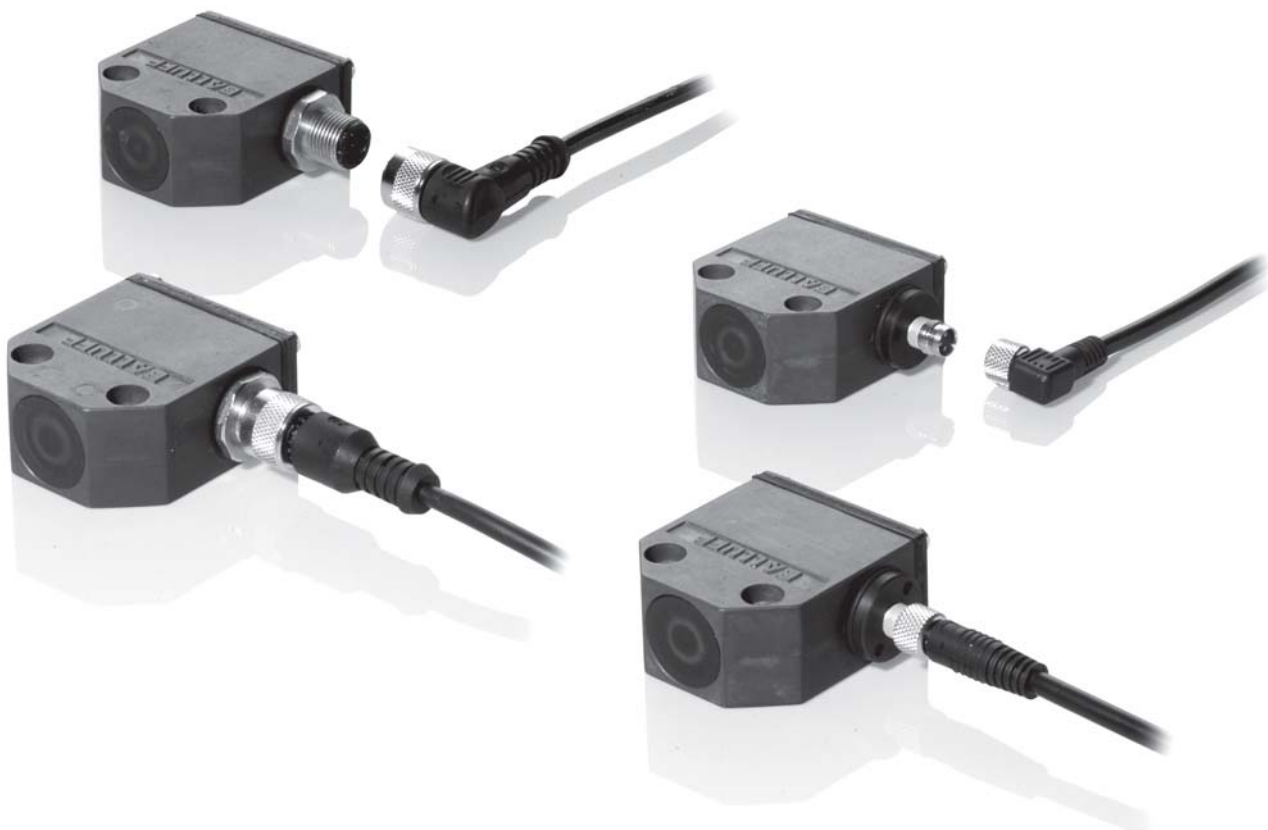

2.1


Multiple
position
switches
series602-11
610-11
611-11
612-11
613-11
605-11
603-11
650-11Single position
switches
series
H2 and H3

5.1

5.2


5.3



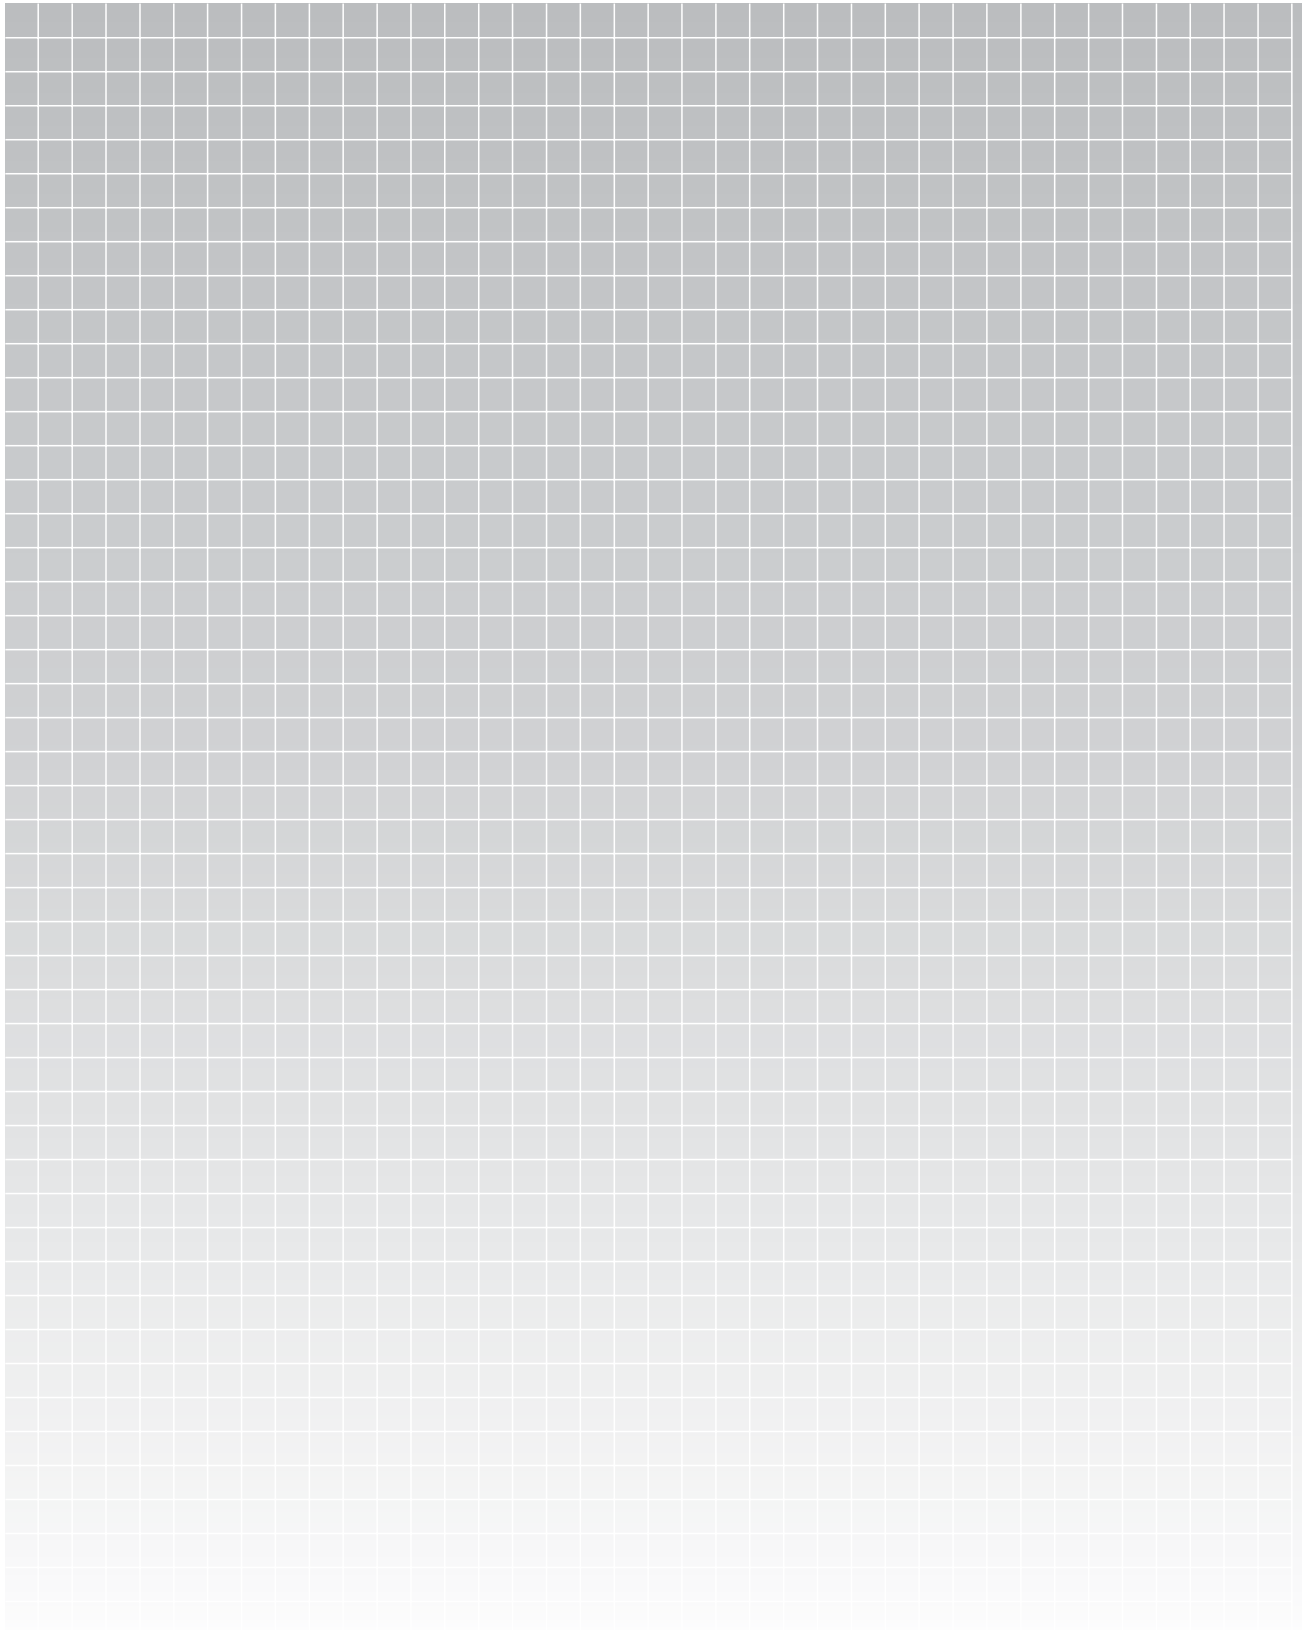

**Inductive multiple
position switches
with extended
switching
distance 4 mm**

96	Principles
97	Series 602-11 per DIN 43697
98	Series 610-11
99	Series 605-11

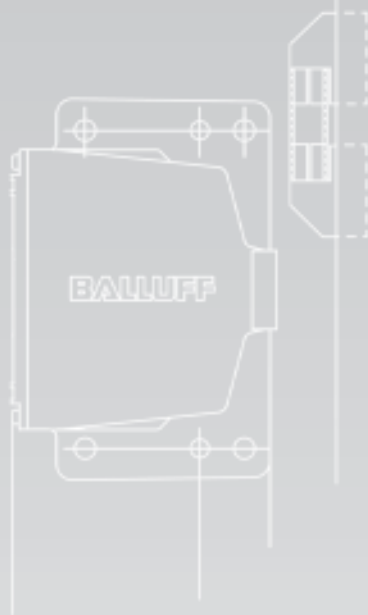

more added value

- Very long service life
- Highly reliable,
especially for robotic applications




2.2

Multiple
position
switches
series
602-11
610-11
605-11

5.1

5.2

5.3



Inductive Multiple Position Switches with Extended Switching Distance 4 mm


Principles

Inductive multiple position switches in this series are characterized by a compact housing and generous switching distances. The result is a non-contacting, wear-free sensor.


The tuned sending frequencies of the inductive switch elements allow them to be located very close to each other.

Mutual interference is precluded at 12 mm spacing and 4 mm switching distance.

The inductive switch elements are already factory installed.

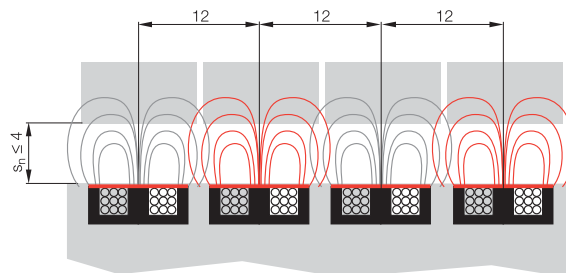

Complementary inductive switch elements can be used as normally open or normally closed.



Robot Movement Safety

If two physical channels (1 normally and 1 normally closed) are powered by a switching power supply, this will enable cross-connection detection.

In such a system different signals must be sent to the controller.


In case of error (short circuit, miswiring, ...) both signals are identical and are recognized by the controller as a cross-connection fault condition. Monitoring can be handled by a safety programmable controller or with a Pilz type safety switching device.



Inductive Multiple Position Switches with Extended Switching Distance 4 mm

Series 602-11
per DIN 43697

Type	Multiple position switch
Switch position spacing	12 mm
Mounting and function dimensions	per DIN 43697

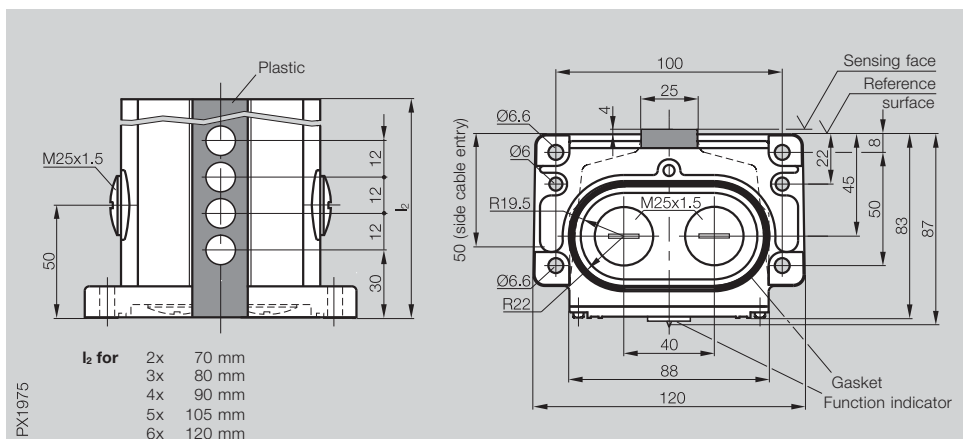

Ordering code	BNS 816-X603-B_ _-00-12-602-11
Housing material	Cast aluminum, corrosion-resistant, anodized finish
Connection type	M25x1.5 for connector or cable gland
Ambient temperature range	-25...+70 °C
Degree of protection per IEC 60529	IP 67
Function indicator	LED

Inductive switch elements with head Ø 10 mm

Inductive switch elements	Electrical version	Rated operating distance s_n	Assured operating distance s_a
BES 517-100-S42, ...-S43, ...-S44	PNP, complementary, 10...60 V DC, short circuit protected	4 mm	0...3.2 mm

Ordering example:

BNS 816-X603-B04-00-12-602-11


BNS 816-X603-B_ _-00-12-602-11

No. of switch positions

- 02** 2x
- 03** 3x
- 04** 4x
- 05** 5x
- 06** 6x

Other sizes and connectors on request.

Installation

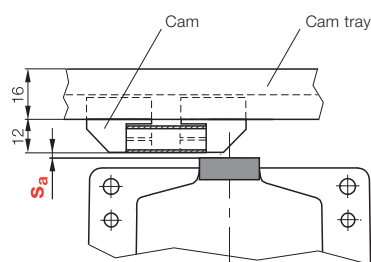

Caution!

To ensure switching function s_a must be in a range of $0 < s_a \leq 0.81 s_n$.




2.2

Multiple position switches series
602-11
610-11
605-11

5.1


5.2

5.3



Series 610-11

Type	Multiple position switch
Switch position spacing	12 mm

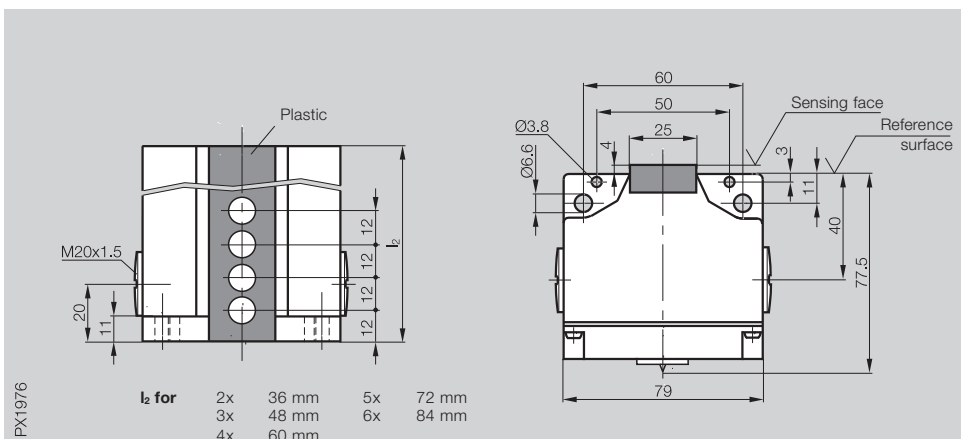

Ordering code	BNS 816-X603-B _ _-00-12-610-11
Housing material	Cast aluminum, corrosion-resistant, anodized finish
Connection type	M20×1.5 for connector or cable gland
Ambient temperature range	–25...+70 °C
Degree of protection per IEC 60529	IP 67
Function indicator	LED

Inductive switch elements with head $\varnothing$ 10 mm

Inductive switch elements	Electrical version	Rated operating distance s_n	Assured operating distance s_a
BES 517-100-S42, ... S43, ... S44	PNP, complementary, 10...60 V DC, short circuit protected	4 mm	0...3.2 mm

Ordering example:


BNS 816-X603-B04-00-12-610-11

BNS 816-X603-B -00-12-610-11

No. of switch positions	
02	2×
03	3×
04	4×
05	5×
06	6×

Other sizes and connectors on request.

Installation

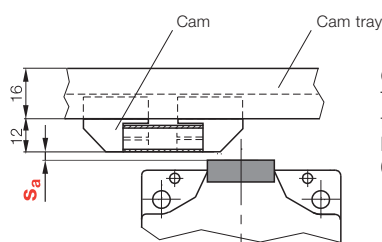

Caution!


Caution:
To ensure switching function s_a must be in a range of $0 < s_a \leq 0.81 s_n$.



Inductive Multiple Position Switches with Extended Switching Distance 4 mm

Series 605-11

Type	Multiple position switch
Switch position spacing	12 mm

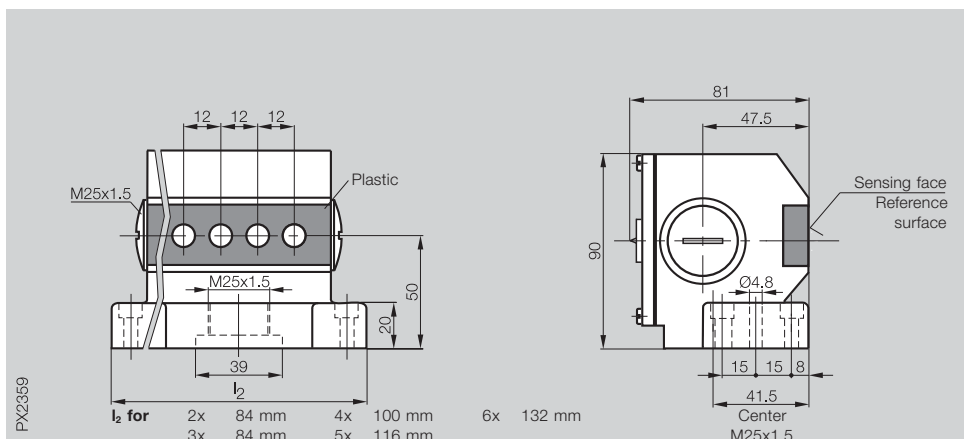

Ordering code	BNS 816-X603-B_-00-12-605-11
Housing material	Cast aluminum, corrosion-resistant, anodized finish
Connection type	M25x1.5 for connector or cable gland
Ambient temperature range	-25...+70 °C
Degree of protection per IEC 60529	IP 67
Function indicator	LED

Inductive switch elements with head Ø 10 mm

Inductive switch elements	Electrical version	Rated operating distance s_n	Assured operating distance s_a
BES 517-100-S42, ...-S43, ...-S44	PNP, complementary, 10...60 V DC, short circuit protected	4 mm	0...3.2 mm

Ordering example:

BNS 816-X603-B04-00-12-605-11

BNS 816-X603-B_-00-12-605-11


No. of switch positions

- 02 2x
- 03 3x
- 04 4x
- 05 5x
- 06 6x

Inquire for connectors.

**Not for new applications.
Still available for replacements.**

Installation

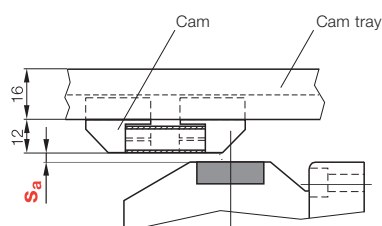

Caution!

To ensure switching function s_a must be in a range of $0 < s_a \leq 0.81 s_n$.



2.2


Multiple position switches series
602-11
610-11
605-11

5.1

5.2

5.3



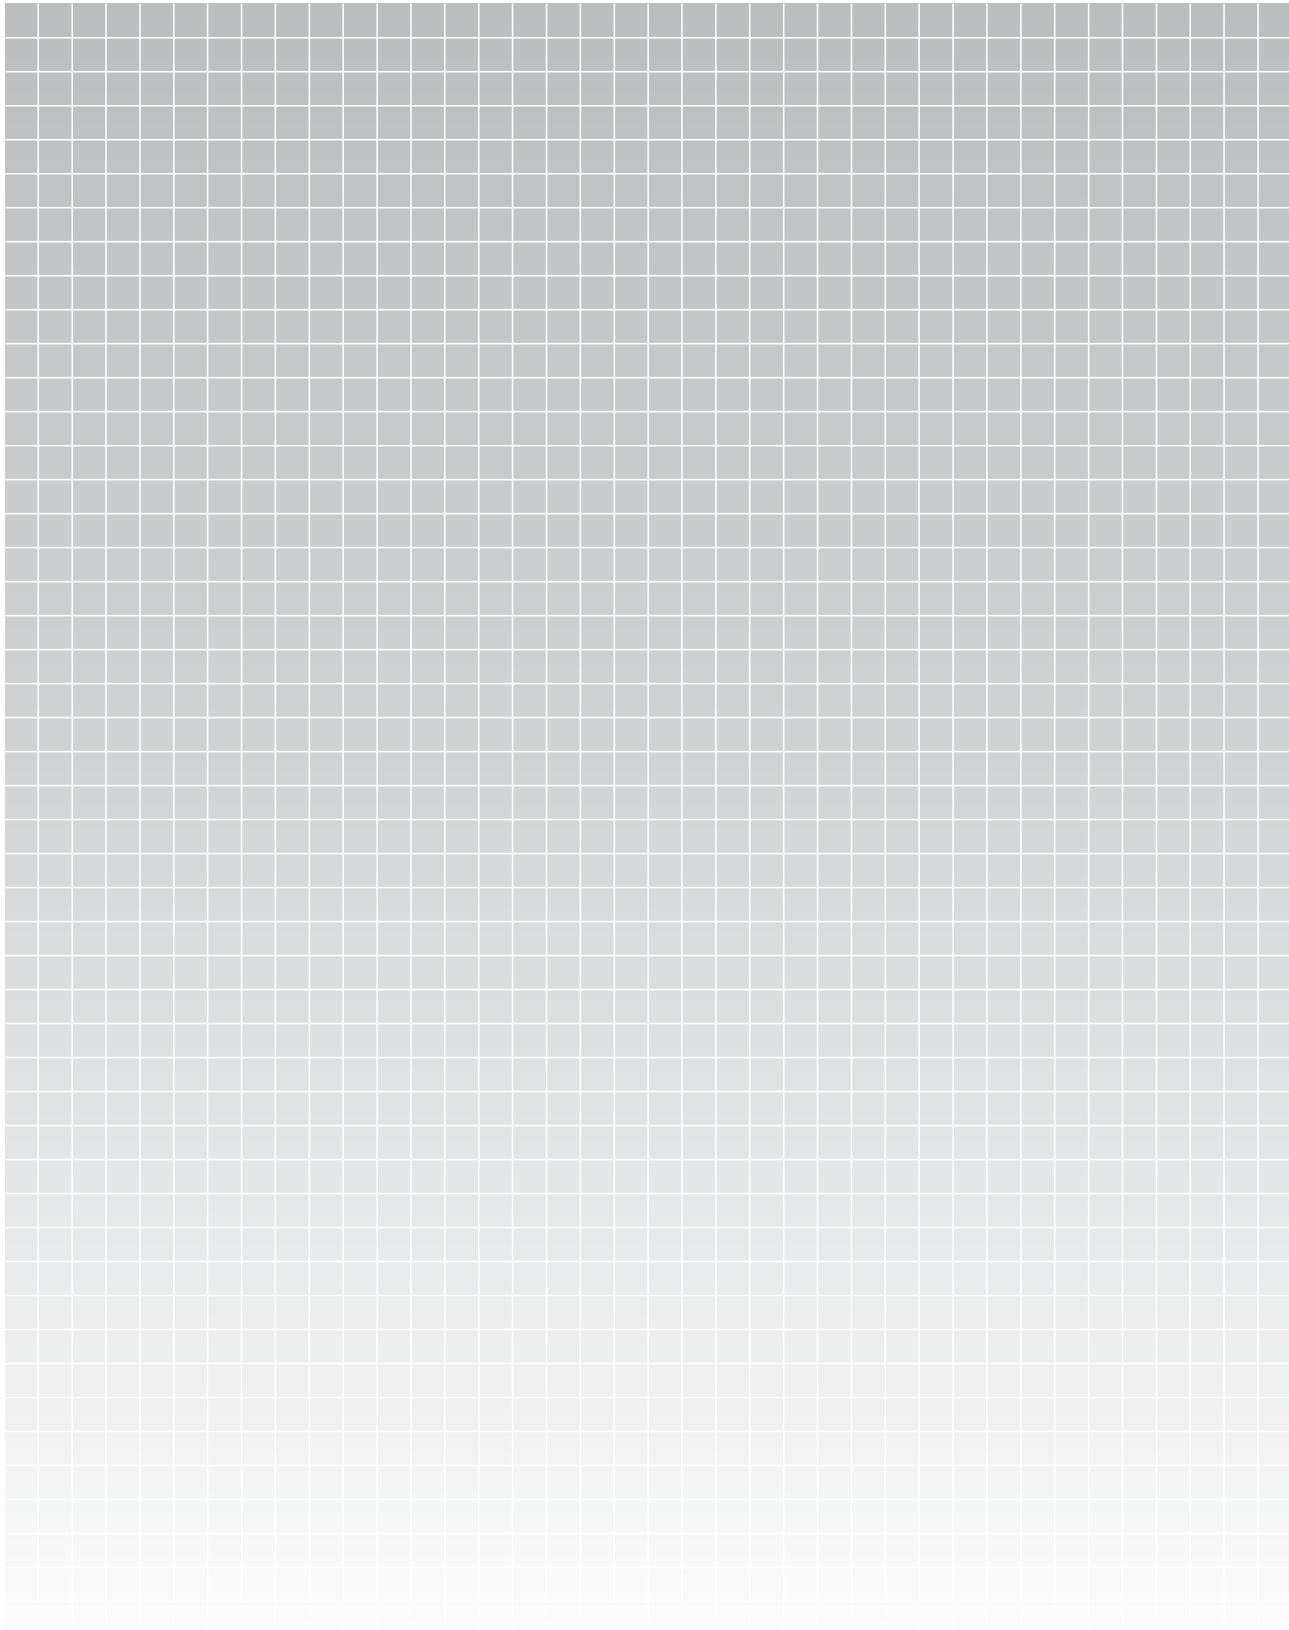

Special form factors

- 102 Multiple position switches with mechanical and inductive switch positions
- 104 Custom products

more added value

- Long service life
- Optimized for your requirements and applications




3

5.1

5.2

5.3



Mechanical and inductive switch positions in one multiple switch housing

For applications in which different requirements need to be met, mixed assemblies can be used.

For example, simple position sensing can be done using inductive switch elements, and safety-relevant functions handled using safety switch positions.

The following possibilities are available:


- Mechanical switch element actuated with telescoping plunger
- Safety switch element per DIN EN 60204-1/VDE 0113 actuated with rigid plunger
- Inductive switch element

Mixing options

When ordering please indicate the **individual switch positions** in plain text. Begin with the first switch position as seen from the mounting surface.

Mixed assembly switches get a special ordering code.

Example for Series 100

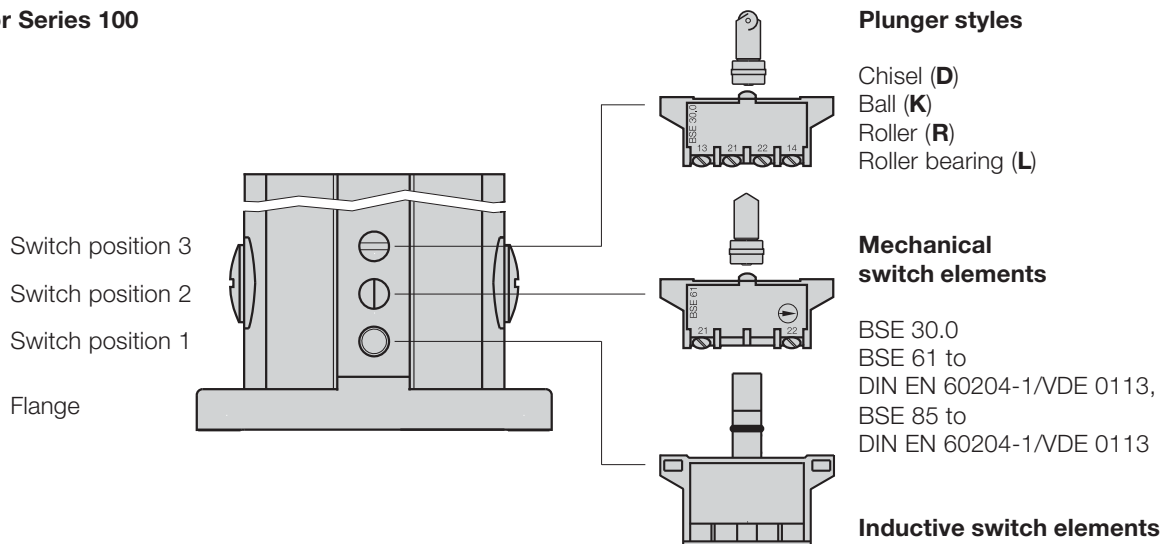

PA	BES 517-110
NA	BES 517-108
WS	BES 517-410
WO	BES 517-421
KHG	BES 517-560-H
KHH	BES 517-561-H
NG	BES 516-314-N
THA	BES 517-142-Y
EJA	BES 517-463
AAA	BES 517-464
DH	BES 516-110-D

Optional

Function indicators

FD/FE/FC for mechanical switch positions

Connector S80/S90 to make installation easier

Note for standard series

The standard versions are described in:

Section 1
Mechanical Single and Multiple Position Switches

Section 2
Inductive Single and Multiple Position Switches



Detailed information on switch elements and plungers can be found in:

Section 5.1
Mechanical and Inductive Switch Elements

Section 
Principles

Example for Series 40

Switch position 3
Switch position 2
Switch position 1

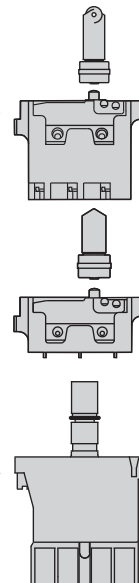

Plunger styles

Chisel (**D**)
Ball (**K**)
Roller (**R**)

Mechanical switch elements

BSE 63 with forced-opening
BSE 64 with forced-opening
BSE 69.1
BSE 70.1
BSE 73.1
BSE 74.1

Inductive switch elements

TNB BES 517-311-Y
TOB BES 517-312-Y

Optional
Function indicator FC for mechanical switch positions
Connector S80 to make installation easier




3

5.1

5.2

5.3



**Make use of the Balluff
offering in the customer-
specific products area**


Mixed assembly
switches optimized for your
requirements and
applications

Your Balluff sales team will
be glad to help you select
the right switch.

more added value

Customer-specific products
Increasing your productivity



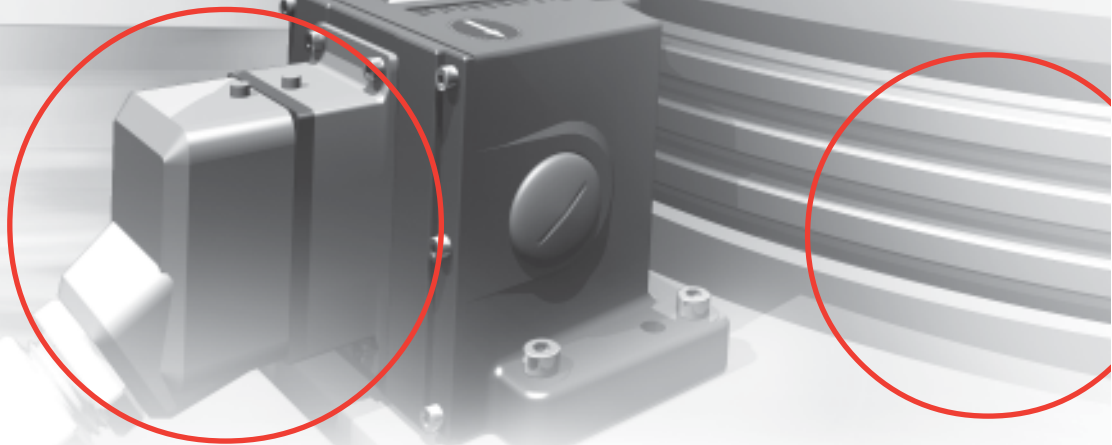


3


5.1

5.2


5.3




Customer-specific connectors

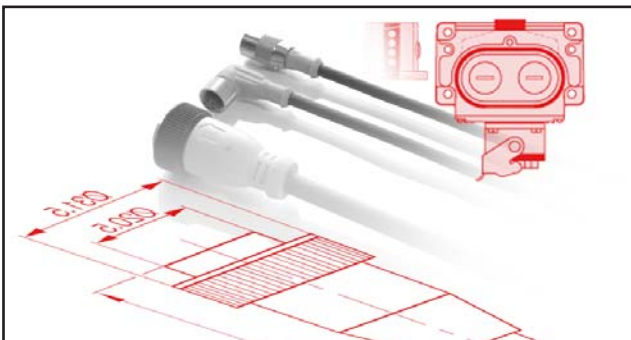

Cam trays in flexible lengths

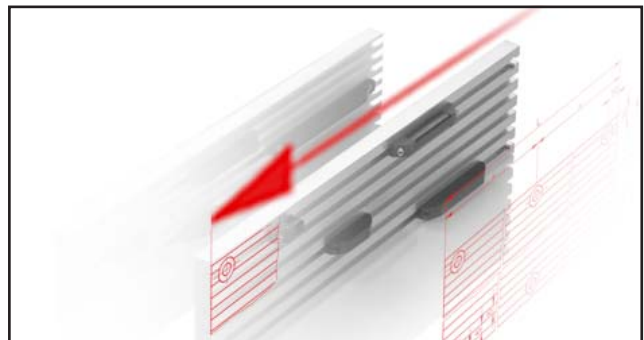

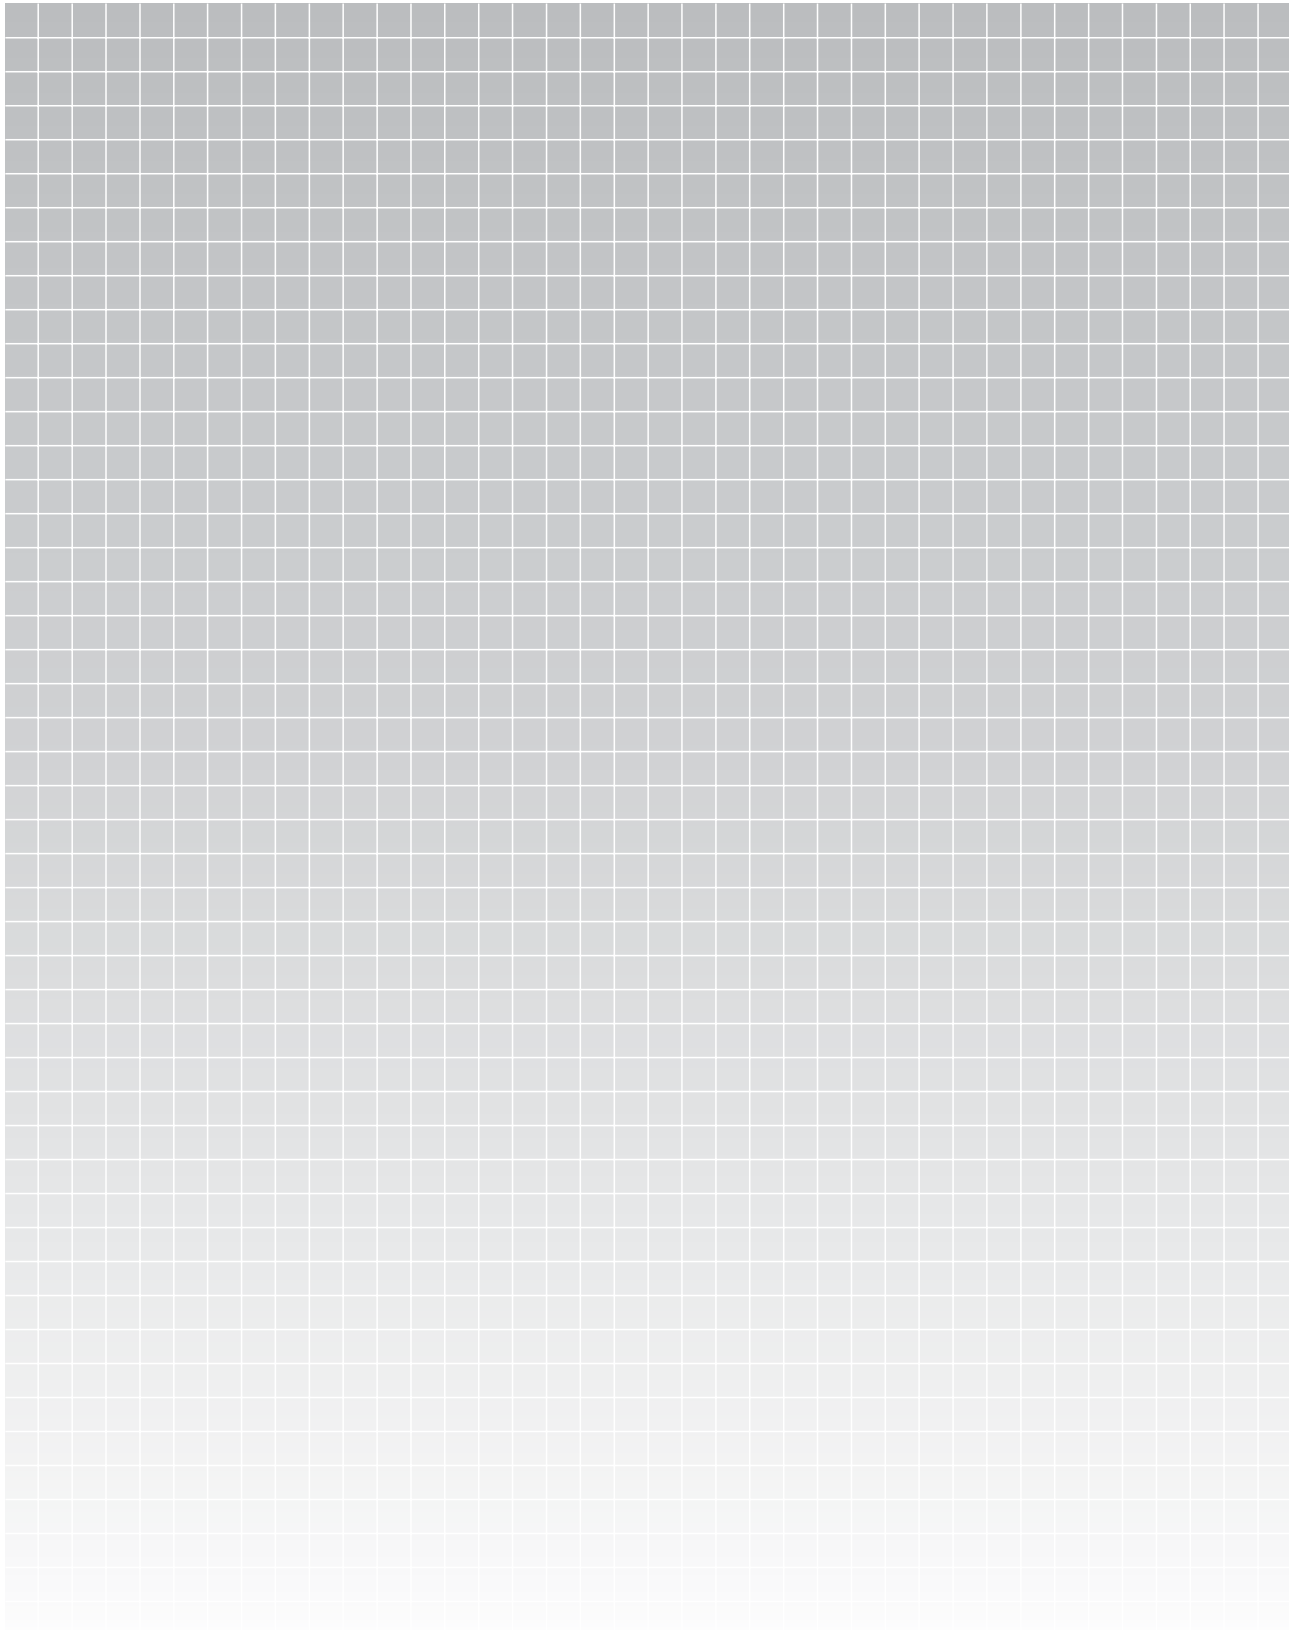

more added value

- Simplest and most economical installation
- For flexible use
- Also ideal for retrofits

Wireless system

108	Principles
110	Wireless Position Switches Series F 60 per DIN 43693
112	Wireless Receiver Box BWT R1-4R1D-10_-T




4

5.1

5.2

5.3





Wireless transmission system for mechanical switches


- Self-contained transmitter with no separate power supply
- 868 MHz standard transmission frequency, no license fees
- Simplest installation with no wiring complexity
- Mounting and function dimensions per DIN 43693

Applications



- Grippers
- Rotary index tables
- Specialty machine building
- Retrofitting



Multi-network capable

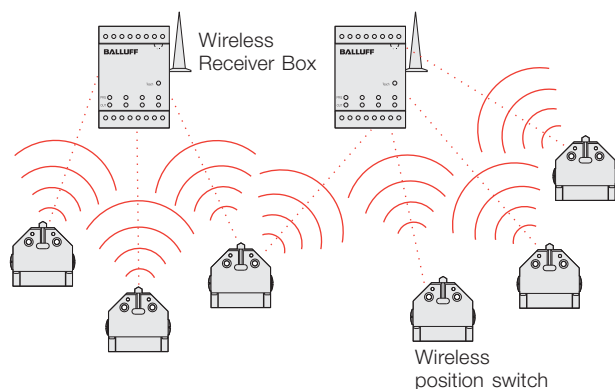

Serial data output

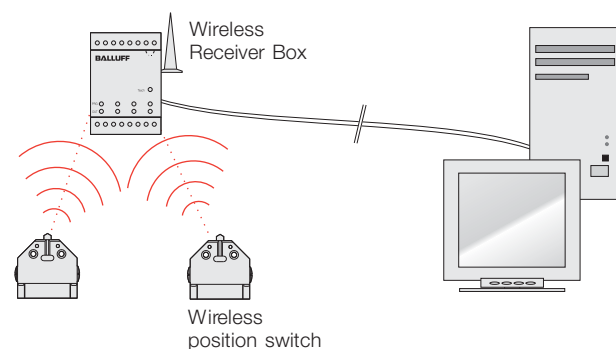

Advantages of the wireless position switch

- Simple installation, no wiring complexity for the switch
- For flexible use
- Also ideal for retrofitting machines and equipment

Ranges

- approx. 30 m on plant floors, up to 300 m outdoors
- approx. 20 m through max. 5 walls (plaster board/dry wood)
- approx. 10 m through max. 2 walls (tile/aerated concrete)

Wireless position switch per DIN 43693

- Dual-chamber system with IP 67 protection: wear-free membrane with hermetic sealing from plunger mechanism and switch chamber
- Maintenance-free, self-lubricating plunger guide with slide bearing

Wireless position switch with wiper plate

- Increased function security under extreme conditions of use
- Wiper plate prevents plunger from sticking in the guide
- For use in wet areas with strongly adhering media

Ordering example:

BNS 819-FD-60-W13

BNS 819-F-60-W1

Plunger style


- D** Chisel
- K** Ball
- R** Roller
- L** Roller bearing
- E** Chisel with wiper plate

Approach direction

- 3** longitudinal, parallel to mounting surface
- 5** lateral, 90° to mounting surface



Type	Wireless position switches
Mounting and function dimensions	per DIN 43693

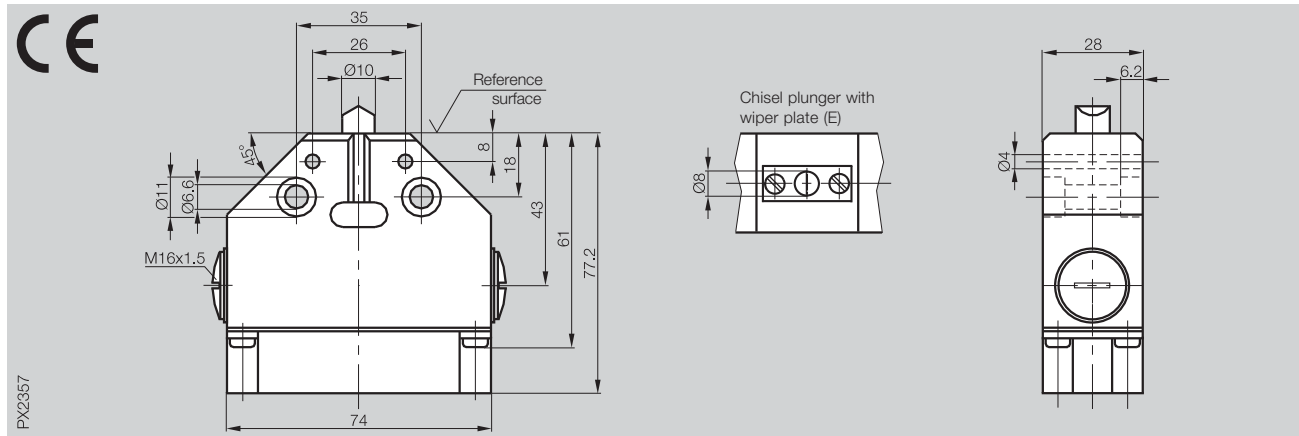

Plunger style	Chisel (D), Ball (K), Roller (R), Roller bearing (L) or Chisel with wiper plate (E)
Plunger material	Stainless steel, contact surfaces induction hardened
Housing material	Cast aluminum, corrosion-resistant, anodized finish
Ambient temperature range	0...+70 °C
Degree of protection per IEC 60529	IP 67


With switch element	BWT T1-185-01
Ordering code	BNS 819-F_-60-W1_

Switch element	
Transmitting frequency	868 MHz
Switching and transmission principle	snap switch, Electro-generated power production, 14-byte protocol, duty cycle 1 %, 3 protocols per send procedure Uni-directional transmission from switch to receiver


Mechanical data	
Plunger point to reference surface	8 mm
Switchpoint to reference surface	5.5 mm
Maximum plunger travel	3.7 mm
Switching actuating force on plunger	min. 20 N
Switching frequency	max. 60/min
Approach speed	Plunger D, E: 10 m/min Plunger K: 8 m/min Plunger R: 20 m/min Plunger L: 60 m/min
Repeatability	± 0.2 mm

For applications with very limited space, smaller form factors with battery on request.

Installation

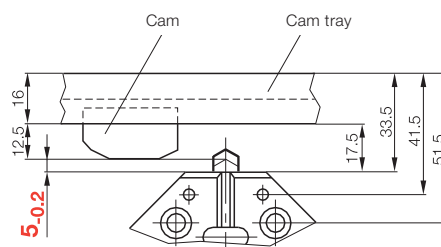

Note!
To ensure switching function, the dimension 5-0.2 is especially critical.



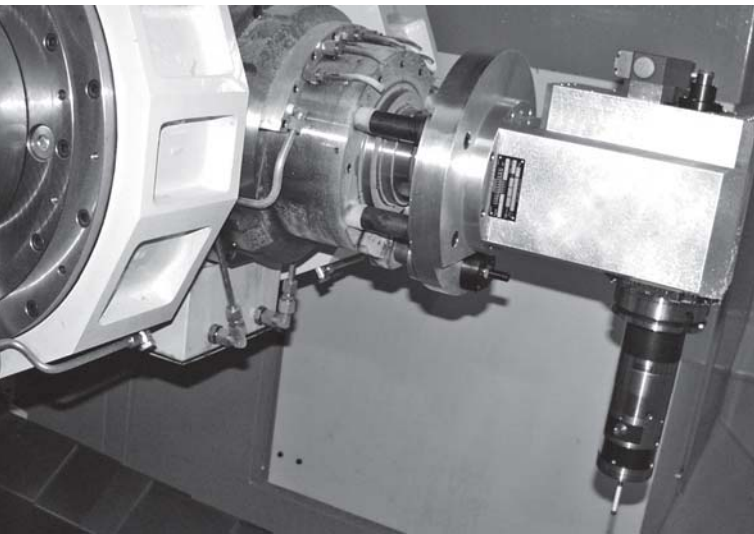



Photo credit: MCM

Advantages

- Simple installation using teach-in and active range restriction in programming mode
- Power-Down function with BWT R1-4R1D-102-T for storing the last signal status when receiver power is interrupted
- Protection against inadvertent teaching with programming jumper
- LED for visualizing programming
- LED's for indicating switching states
- 4 programmable outputs – normally open or normally closed
- Antenna socket for SMB plug
- Easy mounting on DIN rail
- Reset function



Type	Wireless receiver box	Wireless receiver box with Power-Down function

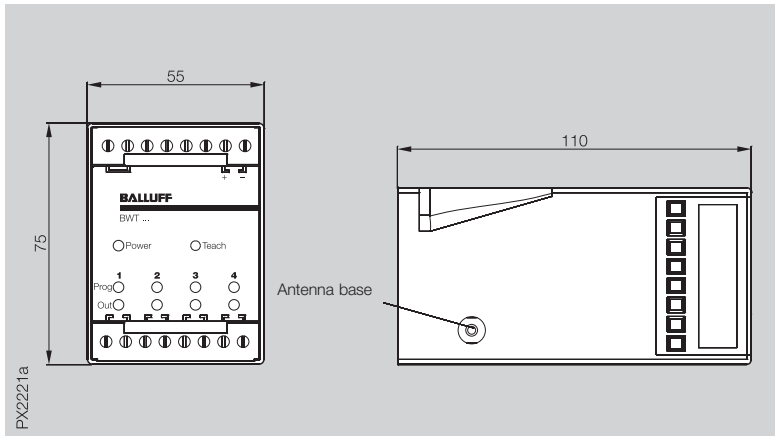

Ordering code	BWT R1-4R1D-101-T	BWT R1-4R1D-102-T
---------------	-------------------	-------------------

Electrical data

Rated operational voltage U_e	24 V DC
Supply voltage U_B	20.4...28.8 V DC
Ripple	$\leq 5\%$ of U_e
No-load supply current I_0 max.	20 mA
Current consumption	1.5 W
Max. load	2 A/30 V DC
Min. relay switching frequency (1 A, 30 V DC, resistive load)	2×10^5

Mechanical data

Housing material	PC
Connection type	Clamping terminal
Degree of protection per IEC 60529	IP 20
Contamination class	2

Ambient data

Max. range	30 m
Range reduction during the programming procedure	0.5 m
Receive frequency	868 MHz
Ambient temperature range T_a	+5...+65 °C
Utilization category	DC 13

Antenna

BWT A4-01-50R-SMB-02,5


please order separately!


4


5.1

5.2

5.3



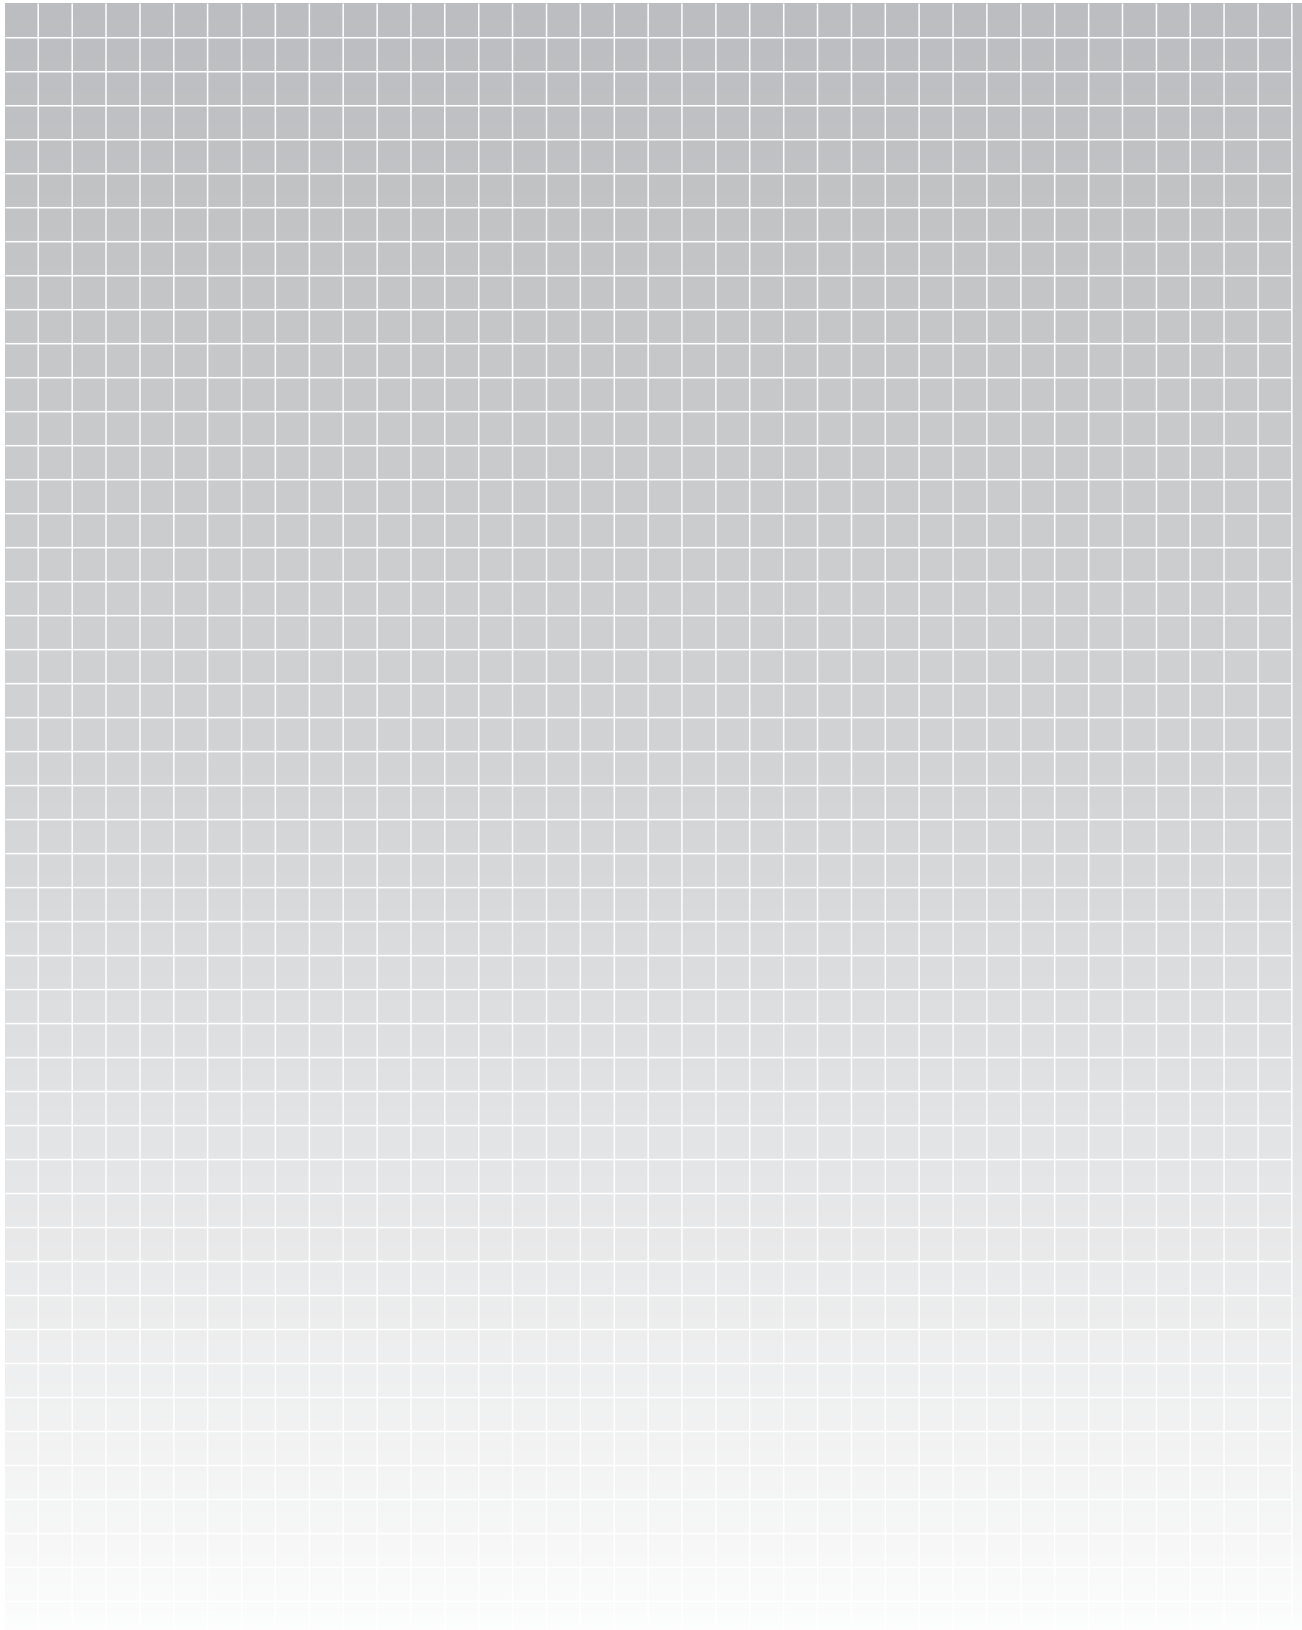

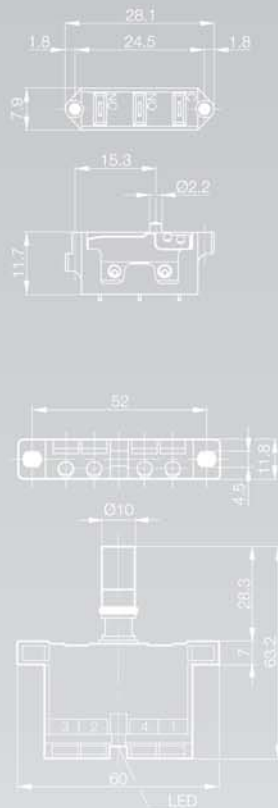

more added value





- Mechanical and inductive principle selectable
- Sensors and accessories ideally matched







- 116 Snap switch elements, Creep switch element BSE
- 117 Snap switch elements BSE
- 118 Inductive switch elements DC 3/4-wire
- 120 Inductive switch elements AC, DC 2-wire
- 122 Snap switch element BWT for wireless position switch F 60

Mechanical switch elements









Snap switch elements, creep switch element BSE

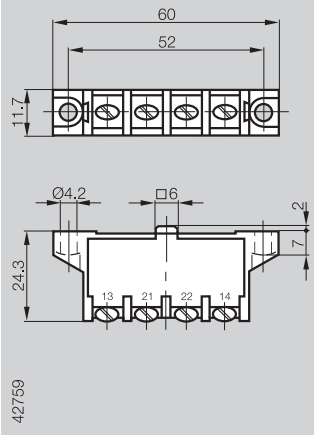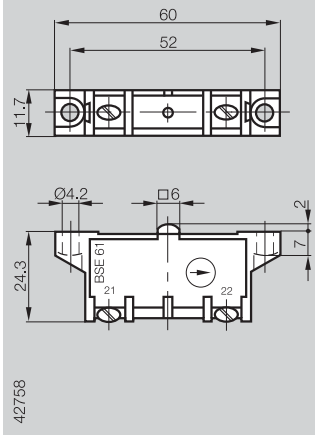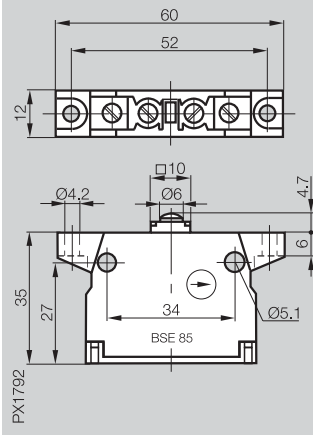Type	Snap switch element BSE 30.0	Creep switch element BSE 61 to DIN EN 60204-1	Snap switch element BSE 85 to DIN EN 60204-1	
for multiple position switches series	100, 62, 61, 72	100, 62, 61, 72	100, 62, 61, 72	
for single position switches series	F 60	F 60	F 60	
				
	Order code for replacement switch elements	BSE 30.0	BSE 61	BSE 85
Construction				
Contact material	Silver, gold plated			
Switching principle	Snap switch			
Contact system	Dual changeover, one normally open and one normally closed, galvanically isolated.			
Contact arrangement	NO 13 + 14 NC 21 + 22 			
Wire cross-section (with end ferrule)	max. 2×1.5 mm ²			
Connection type	Screw connection M3			
Mechanical data				
Switching actuation force on telescoping plunger	min. 20 N			
Switching actuation force on rigid plunger	min. 15 N			
Bounce time	≤ 1.5 ms			
Switchover time	≤ 10 ms			
Switching frequency	300 operations/min			
Housing material	Duro- and Thermoplast			
Tightening torque max.	0.5 Nm			
Ambient temperature range T _a	-5...+85 °C			
Electrical data				
Isolation	Group C (VDE 0110)			
Nominal voltage	240 V AC			
Constant current	6 A			
Minimum load at 24 V DC	≥ 20 mA			
Contact resistance	< 40 mΩ			
Switching capacity	AC 250 V, 40...60 Hz			
	6 A, cos φ = 1			
	2 A, cos φ = 0.8			
	1 A, cos φ = 0.4			
	0.5 A, L/R = 200 ms			
	4 A, L/R = 200 ms			
	Depends on traverse speed and switching frequency			
	2 A, cos φ = 0.8			
Service life				
Mechanical data	> 30 mil. switching operations (VDE 0660)			
Electrical data	Depending on load, switching frequency and traverse speed			
Approval	UL, CSA, CCC			

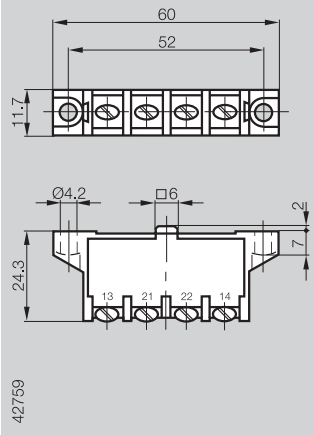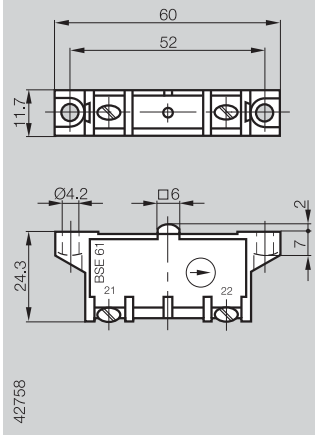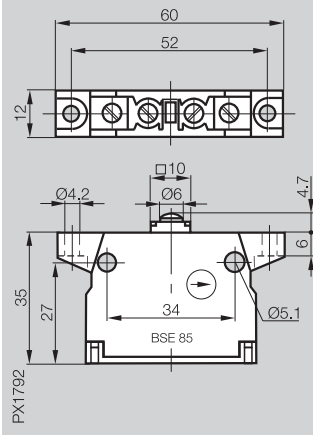Type		Snap switch element BSE 30.0	Creep switch element BSE 61 to DIN EN 60204-1	Snap switch element BSE 85 to DIN EN 60204-1	
for multiple position switches series		100, 62, 61, 72	100, 62, 61, 72	100, 62, 61, 72	
for single position switches series		F 60	F 60	F 60	
					
	Order code for replacement switch elements		BSE 30.0	BSE 61	BSE 85
Construction					
Contact material		Silver, gold plated			
Switching principle		Snap switch			
Contact system		Dual changeover, one normally open and one normally closed, galvanically isolated.			
Contact arrangement		NO 13 + 14 NC 21 + 22 			
Wire cross-section (with end ferrule)		max. 2×1.5 mm ²			
Connection type		Screw connection M3			
Mechanical data					
Switching actuation force on telescoping plunger		min. 20 N			
Switching actuation force on rigid plunger		min. 15 N			
Bounce time		≤ 1.5 ms			
Switchover time		≤ 10 ms			
Switching frequency		300 operations/min			
Housing material		Duro- and Thermoplast			
Tightening torque max.		0.5 Nm			
Ambient temperature range T _a		-5...+85 °C			
Electrical data					
Isolation		Group C (VDE 0110)			
Nominal voltage		240 V AC			
Constant current		6 A			
Minimum load at 24 V DC		≥ 20 mA			
Contact resistance		< 40 mΩ			
Switching capacity		AC 250 V, 40...60 Hz			
		6 A, cos φ = 1			
		2 A, cos φ = 0.8			
		1 A, cos φ = 0.4			
		0.5 A, L/R = 200 ms			
		4 A, L/R = 200 ms			
		Depends on traverse speed and switching frequency			
		2 A, cos φ = 0.8			
Service life					
Mechanical data		> 30 mil. switching operations (VDE 0660)			
Electrical data		Depending on load, switching frequency and traverse speed			
Approval		UL, CSA, CCC			

Mechanical switch elements

Snap switch elements BSE

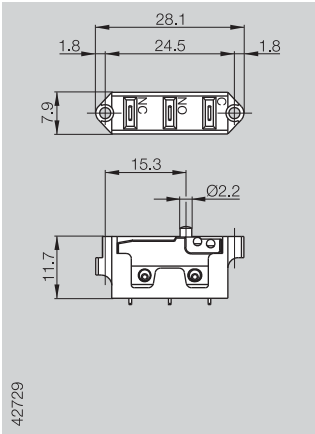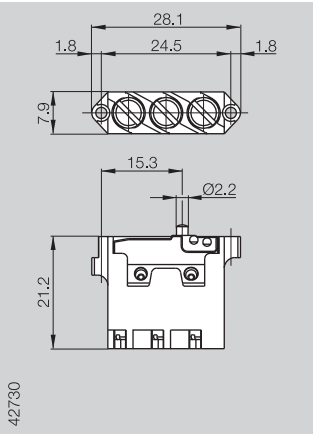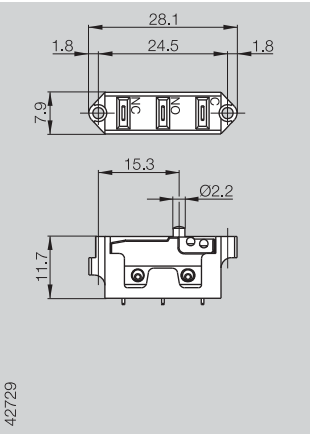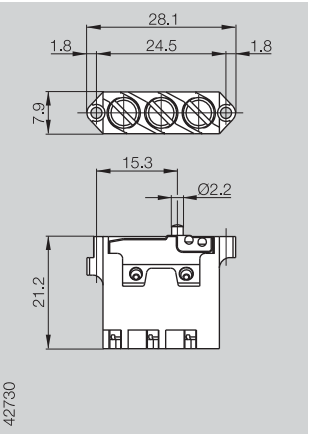Snap switch element BSE 69.1, BSE 73.1		Snap switch element BSE 70.1, BSE 74.1		Snap switch element with positive-opening BSE 63		Snap switch element with positive-opening BSE 64	
46, 40		46, 40		46, 40		46, 40	
99, 100		99, 100		99, 100		99, 100	
							
BSE 69.1		BSE 73.1		BSE 70.1		BSE 74.1	
Silver		Silver		Silver		Silver	
Gold		Gold					
Snap switch		Snap switch		Snap switch		Snap switch	
Single-pole changeover		Single-pole changeover		Single-pole changeover		Single-pole changeover	
NO C + NO NC C + NC  max. 0.75 mm ² Solder connection		NO C + NO NC C + NC  max. 0.75 mm ² Screw terminal		NO C + NO NC C + NC  max. 0.75 mm ² Solder connection		NO C + NO NC C + NC  max. 0.75 mm ² Screw terminal	
min. 8 N		min. 8 N		min. 7.5 N		min. 7.5 N	
≤ 2 ms		≤ 2 ms		≤ 2 ms		≤ 2 ms	
≤ 10 ms		≤ 10 ms		≤ 10 ms		≤ 10 ms	
200 operations/min		200 operations/min		200 operations/min		200 operations/min	
Thermoplast		Thermoplast		Thermoplast		Thermoplast	
0.12 Nm		0.12 Nm		0.12 Nm		0.12 Nm	
-5...+85 °C		-5...+85 °C		-5...+85 °C		-5...+85 °C	
Group C (VDE 0110)		Group C (VDE 0110)		Group C (VDE 0110)		Group C (VDE 0110)	
250 V AC 30 V DC		250 V AC 30 V DC		250 V AC		250 V AC	
5 A		5 A		5 A		5 A	
≥ 20 mA		≥ 20 mA		≥ 20 mA		≥ 20 mA	
< 240 mΩ		< 240 mΩ		< 100 mΩ		< 100 mΩ	
2 A, cos φ = 0.8		2 A, cos φ = 0.8		5 A, cos φ = 0.75		5 A, cos φ = 0.75	
5 A, L/R = 10 ms		5 A, L/R = 10 ms		5 A, L/R = 10 ms		5 A, L/R = 10 ms	
> 10 mil. switching operations (VDE 0660)		> 10 mil. switching operations (VDE 0660)		> 10 mil. switching operations (VDE 0660)		> 10 mil. switching operations (VDE 0660)	
Depending on load, switching frequency and traverse speed		Depending on load, switching frequency and traverse speed		Depending on load, switching frequency and traverse speed		Depending on load, switching frequency and traverse speed	
UL, CSA, CCC		UL, CSA, CCC		cULus, CSA, CCC		cULus, CSA, CCC	




5.1

Code for inductive switch elements
 Rated operating distance s_n
 Assured operating distance s_a
 for multiple position switches series

TOB
1.1 mm
 0...0.9 mm
 603, 650

TNB
1.1 mm
 0...0.9 mm
 603, 650

PA
2 mm
 0...1.6 mm
 602, 610...613, 605

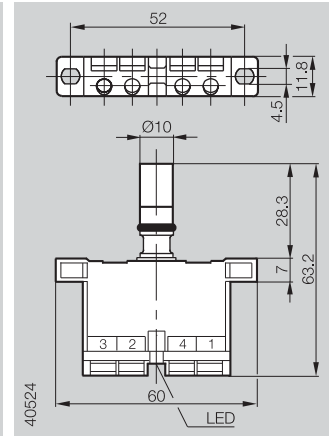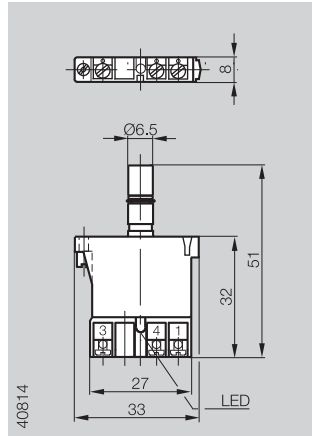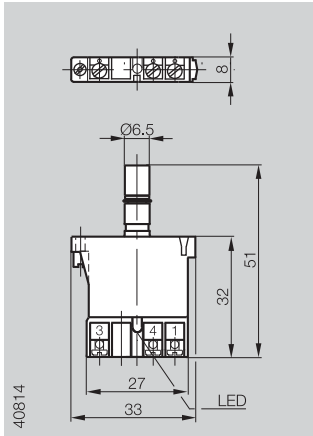

Order code for replacement switch elements

PNP NO
 Complementary

BES 517-312-Y

BES 517-110

NPN NO
 Complementary

BES 517-311-Y

Rated operational voltage U_e
 Supply voltage U_B
 Voltage drop U_d at I_e static
 Rated insulation voltage U_i
 Rated operational current I_e
 No-load current I_0 damped/undamped
 Off-state current I_r
 Polarity reversal protected
 Short circuit protected
 Permissible load capacitance

24 V DC
 10...30 V DC
 ≤ 3.5 V
 75 V DC
 130 mA
 ≤ 25 mA/ ≤ 12 mA
 ≤ 80 μ A
 yes
 yes
 ≤ 1 μ F

24 V DC
 10...30 V DC
 ≤ 3.5 V
 75 V DC
 130 mA
 ≤ 25 mA/ ≤ 12 mA
 ≤ 80 μ A
 yes
 yes
 ≤ 1 μ F

24 V DC
 10...60 V DC
 ≤ 1.5 V
 75 V DC
 200 mA
 ≤ 15 mA/ ≤ 12 mA
 ≤ 50 μ A
 yes
 yes
 ≤ 0.5 μ F

Repeat accuracy R
 Ambient temperature range T_a
 Switching frequency f
 Utilization category
 Function indicator

≤ 5 %
 -25...+70 °C
 500 Hz
 DC 13
 yes

≤ 5 %
 -25...+70 °C
 500 Hz
 DC 13
 yes

≤ 5 %
 -25...+70 °C
 1500 Hz
 DC 13
 yes


Degree of protection per IEC 60529
 Housing material
 Material of sensing face
 Connection type
 max. conductor cross-section




IP 67
 PA 6.6
 PVDF
 Screw terminals
 up to 1 mm²

IP 67
 PA 6.6
 PVDF
 Screw terminals
 up to 1 mm²

IP 67
 PA 12
 PA 12
 Screw terminals
 up to 1.5 mm²

Wiring diagrams

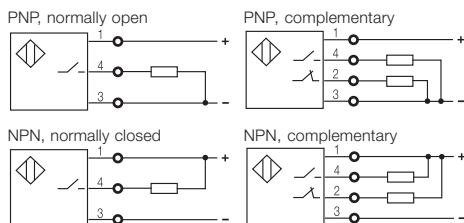

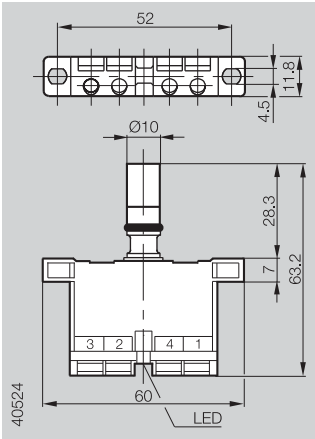
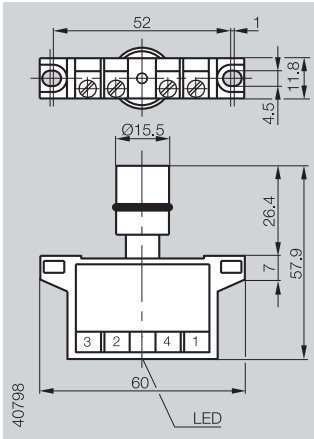
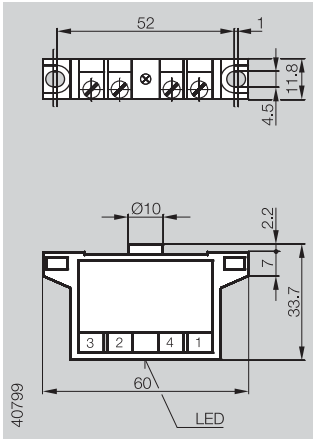
NA 2 mm 0...1.6 mm 602, 610...613, 605	THA 5 mm 0...4 mm 602, 611, 613, 605	DH 2, 2 mm 0...1.8 mm 100, 62, 72, 61	
			
	BES 517-142-Y	BES 516-110-D	
BES 517-108			
24 V DC	24 V DC	24 V DC	
10...60 V DC	10...30 V DC	10...30 V DC	
≤ 1.5 V	≤ 3.5 V	≤ 1.2 V	
75 V DC	75 V DC	75 V DC	
200 mA	130 mA	400 mA	
≤ 15 mA/≤ 12 mA	≤ 30 mA/≤ 30 mA	≤ 30 mA/≤ 30 mA	
≤ 50 µA	≤ 80 µA	≤ 100 µA	
yes	yes	yes	
yes	yes	no	
≤ 0.5 µF	≤ 1 µF	≤ 1 µF	
≤ 5 %	≤ 5 %	≤ 5 %	
-25...+70 °C	-25...+70 °C	-25...+70 °C	
1500 Hz	500 Hz	1000 Hz	
DC 13	DC 13	DC 13	
yes	yes	yes	
IP 67	IP 67	IP 67	
PA 12	PA 12	PA 12	
PA 12	PBT	PA 12	
Screw terminals	Screw terminals	Screw terminals	
up to 1.5 mm²	up to 2.5 mm²	up to 2.5 mm²	

Code for inductive switch elements
 Rated operating distance s_n
 Assured operating distance s_a
 for multiple position switches series

WS
2 mm
 0...1.6 mm
 602, 610...613, 605

WO
2 mm
 0...1.6 mm
 602, 610...613, 605

EJA
5 mm
 0...4 mm
 602, 611, 613, 605

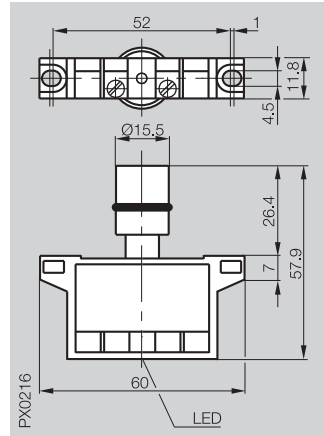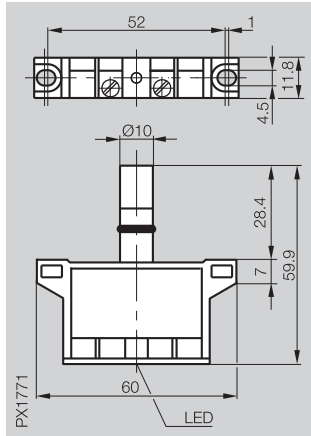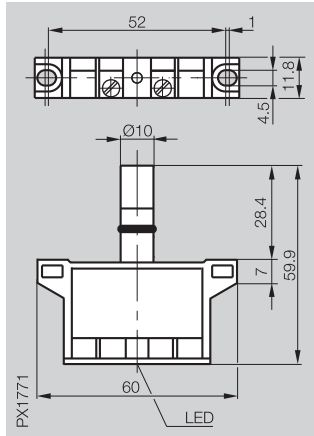

Order code for replacement switch elements

AC	NO
	NC
	NAMUR

BES 517-410

BES 517-421

BES 517-463

Rated operational voltage U_e
 Supply voltage U_B
 Voltage drop U_d at I_e static
 Rated insulation voltage U_i
 Rated operational current I_e
 No-load current I_0 damped/undamped
 Off-state current I
 Polarity reversal protected
 Short circuit protected
 Permissible load capacitance

110 V AC
 35...250 V AC
 ≤ 8.5 V
 250 V AC
 100 mA

110 V AC
 35...250 V AC
 ≤ 8.5 V
 250 V AC
 100 mA

220 V AC
 90...250 V AC
 ≤ 8.5 V
 250 V AC
 100 mA

Repeat accuracy R
 Ambient temperature range T_a
 Switching frequency f
 Utilization category
 Function indicator

≤ 5 %
 -25...+70 °C
 10 Hz
 AC 140
 yes

≤ 5 %
 -25...+70 °C
 10 Hz
 AC 140
 yes

≤ 5 %
 -25...+70 °C
 15 Hz
 AC 140
 yes

Degree of protection per IEC 60529
 Housing material
 Material of sensing face
 Connection type
 max. conductor cross-section
 Approval


IP 67
 PA
 PA 12
 Screw terminals
 up to 2.5 mm²
 cULus

IP 67
 PA
 PA 12
 Screw terminals
 up to 2.5 mm²
 cULus

IP 67
 PA
 PA 12
 Screw terminals
 up to 2.5 mm²
 cULus

Output signal:
 Fully undamped
 Fully damped
 Permissible series resistance R_v

Wiring diagrams

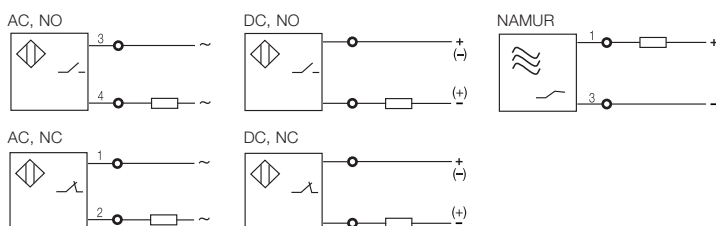

Inductive switch elements

AC, DC 2-wire
DC, 2-wire

AAA 5 mm 0...4 mm 602, 611, 613, 605		KHG 2 mm 0...1.6 mm 602, 610...613, 605		KHH 2 mm 0...1.6 mm 602, 610...613, 605		NG 2 mm 0...1.6 mm 602, 610...613, 605	
BES 517-464							
		BES 517-560-H		BES 517-561-H		BES 516-314-N	
220 V AC		24 V DC		24 V DC		8.2 V DC	
90...250 V AC		10...55 V DC		10...55 V DC		7.7...9 V DC	
≤ 8.5 V		≤ 7 V DC		≤ 7 V DC			
250 V AC		75 V DC		75 V DC		75 V DC	
100 mA		100 mA		100 mA			
≤ 3000 µA		≤ 1350 µA		≤ 1350 µA			
yes		yes		yes		yes	
no		yes		yes		no	
		≤ 0.5 µF		≤ 0.5 µF			
≤ 5 %		≤ 5 %		≤ 5 %		≤ 5 %	
-25...+70 °C		-25...+70 °C		-25...+70 °C		-25...+70 °C	
15 Hz		1000 Hz		1000 Hz		1000 Hz	
AC 140		DC 13		DC 13			
yes		yes		yes		no	
IP 67		IP 67		IP 67		IP 67	
PA		PA 12		PA 12		PBT	
PA 12		PA 12		PA 12		PBT	
Screw terminals		Screw terminals		Screw terminals		Screw terminals	
up to 2.5 mm ²		up to 2.5 mm ²		up to 2.5 mm ²		up to 2.5 mm ²	
cULus							
						Current change (no trigger response)	
						≥ 4 mA	
						≤ 1 mA	
						550...1100 Ohm	


5.1

Type

Snap switch element
BWT T1-185-01

for wireless position switches series

F 60

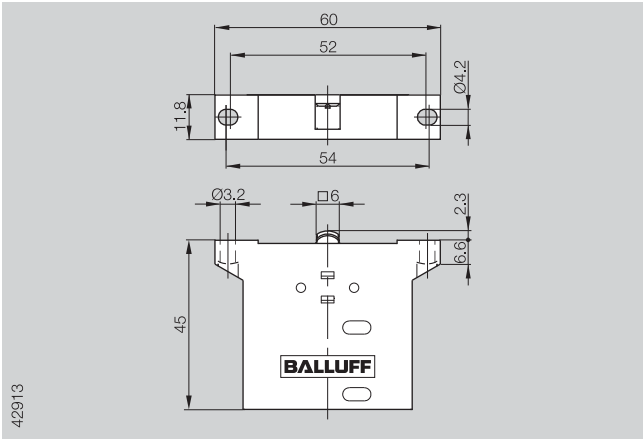

Ordering code for replacement element

BWT T1-185-01

Construction

Switching principle

Snap switch

Mechanical data

Switching actuation force on telescoping plunger
Switching frequency
Housing material
Ambient temperature range T_a

min. 20 N
max. 60 operations/min
Duroplast
-5...+70 °C

Electrical data

Supply voltage
Transmitting frequency
Transmission power
Protocol
ID number
Duty cycle


Electrodynamic power generator
868 MHz
max. 10 mW
14 bytes
32 bits
1 %

Service life

Mechanical data
Electrical

> 0.25 mil. switching operations
Depending on load,
switching frequency and traverse speed

124	Cam trays
126	Cams for mechanical single and multiple position switches
128	Cams for inductive single and multiple position switches

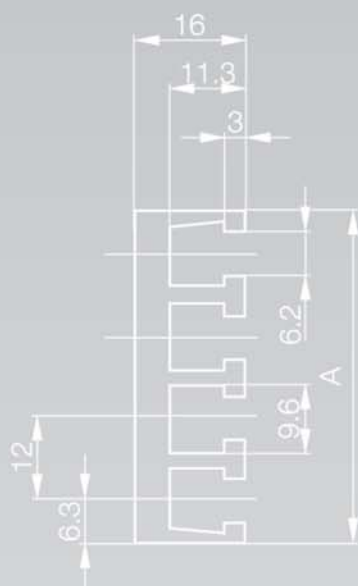

more added value



- Optimized for your particular application
- Rugged and reliable
- Versatility through many possible combinations



Cam Trays and Cams

Cam trays

Type	Aluminum cam trays with 8 mm slot spacing for switches with switch position spacing 8 mm for cams BNN 520-81-S-___ or BEN 516-19-___	Steel cam trays with 10 mm slot spacing for switches with switch position spacing 10 mm for cams BNN 520-81-S-___ or BEN 516-19-___
------	--	---

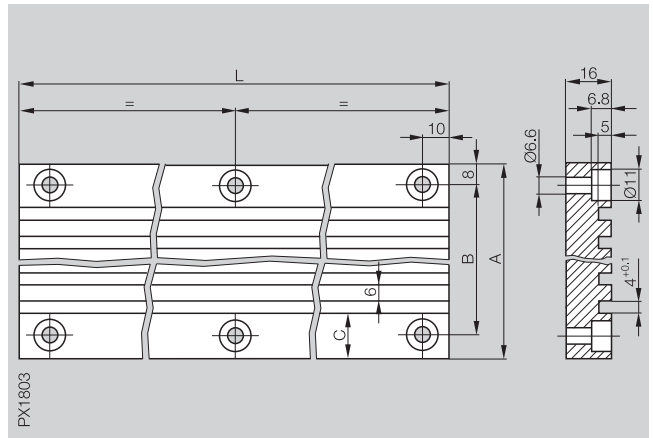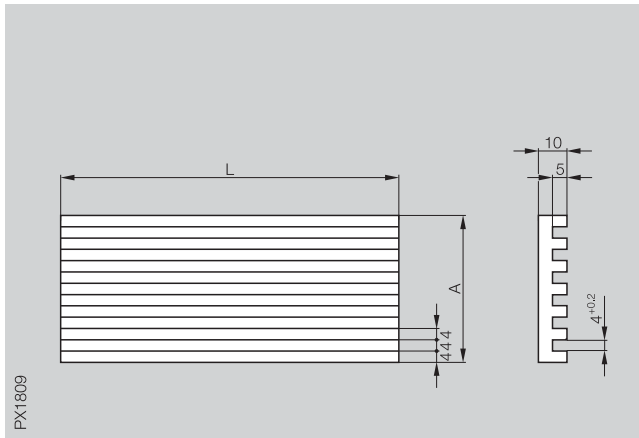

Order code	BNL 5308-100-_-_-_-_-_- with holes					
	BNL 5304-080-_-_-_-_-_- without holes		BNL 5306-100-_-_-_-_-_- without holes			
	Number of slots	Dimension A	Number of slots	Dimension A	Dimension B	Dimension C
	02	20	02	46	30	16
	03	28	03	56	40	16
	04	36	04	68	52	17
	06	52	05	76	60	16
	08	68	06	87	71	16.5
	10	84	08	108	92	17
			10	126	110	16
			12	148	132	17
			14	167	151	16,5
			16	188	172	17

Dimensions in mm L = Standard cam tray lengths:
1000, 1200, 1400, 1600, 1800, 2000 or 2500 mm.

L = Standard cam tray lengths:
200, 400, 600, 800, , 1000 or 1200 mm.

Cam trays

Cam trays are used for holding cams.
We offer these in standard lengths with or without standard holes.

Installation note

Cam trays should be mounted on flat surfaces or machined members.

Ordering example:

BNL 5304-120-04-1000

BNL 53

Version

- 04** Aluminum, no holes
- 07** Aluminum, with holes
- 06** Steel, no holes
- 08** Steel, with holes
- 10** Aluminum, no holes, T-slot

Slot spacing


- 80** 8 mm
- 100** 10 mm
- 120** 12 mm
- 160** 16 mm

Number of slots


- 02** 2 slots
- ...** (see table)

Total length L


(see standard lengths)

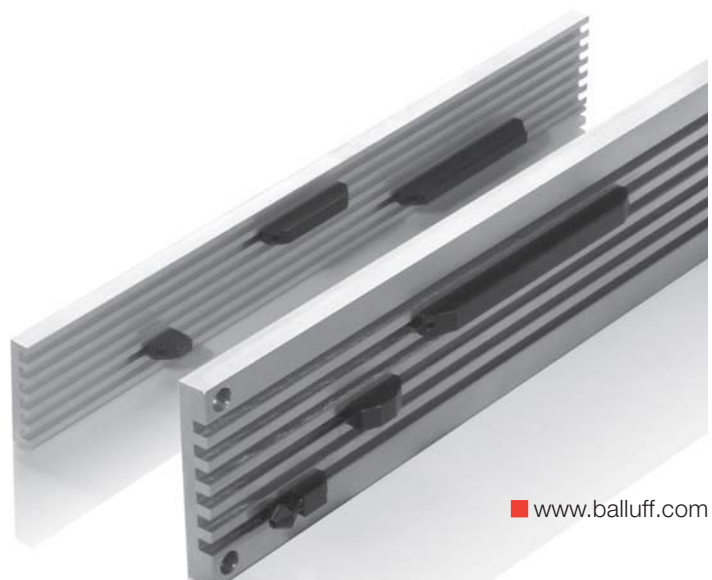

Aluminum cam trays with **12 mm** slot spacing
for switches with switch position spacing **12 mm**
for cams BNN 520-UA/UB-____ or BEN 516-14-____
Form A per DIN 69638

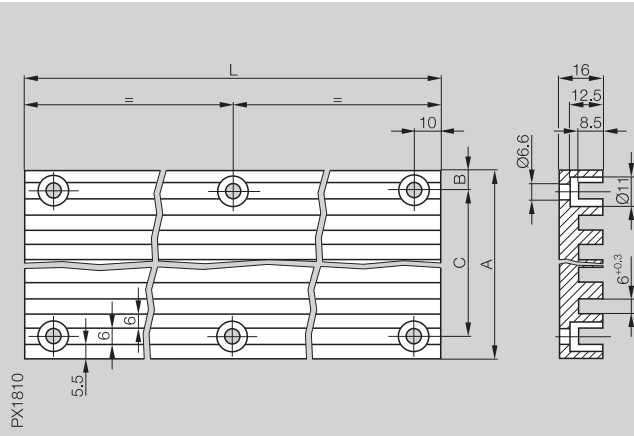

Aluminum cam trays with **16 mm** slot spacing
for switches with switch position spacing **16 mm**
for cams BNN 520-UA/UB-____ or BEN 516-14-____
Form A per DIN 69638

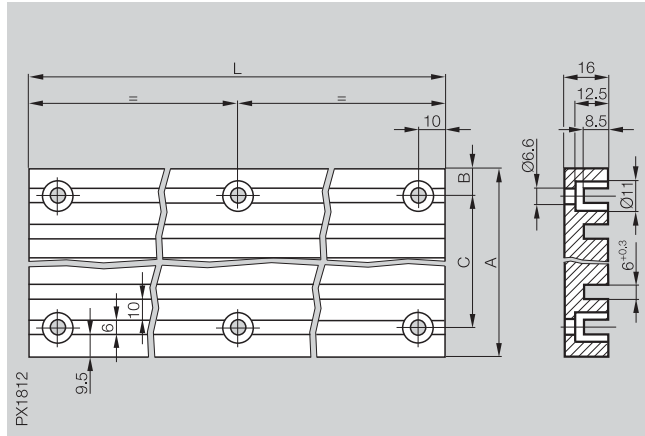

BNL 5307-120-____ with holes
BNL 5304-120-____ no holes

Number of slots	Dimension A	Dimension B	Dimension C
02	29	14.5	
04	53	26.5	
06	77	8.5	60
08	101	8.5	84
10	125	8.5	108


BNL 5307-160-____ with holes
BNL 5304-160-____ no holes

Number of slots	Dimension A	Dimension B	Dimension C
02	41	20.5	
04	73	36.5	
06	105	12.5	80
08	137	12.5	112

L = Standard cam tray lengths:
1000, 1200, 1400, 1600, 1800, 2000 or 2500 mm.

L = Standard cam tray lengths:
1000, 1200, 1400, 1600, 1800, 2000 or 2500 mm.


Type Aluminum cam trays with **12 mm** slot spacing
for switches with switch position spacing **12 mm**
for cams BNN 520-TA/TB-____ and BEN 516-13-____
Form B per DIN 69638

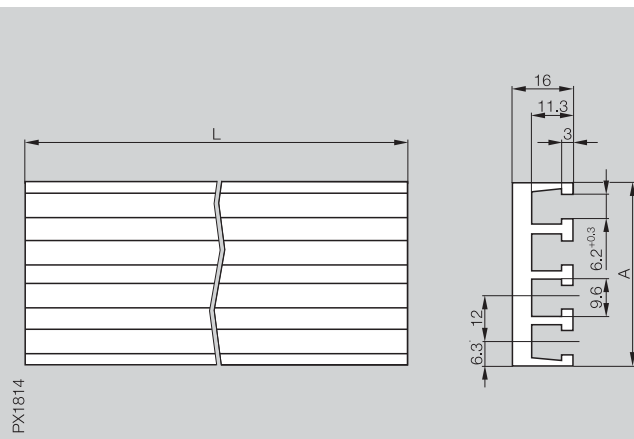

Order code BNL 5310-120-____ no holes

Number of slots	Dimension A
04	48.6
06	72.6

Dimensions in mm L = Standard cam tray lengths:
200, 400, 600, 800, 1000, 1200, 1400, 1600, 1800, 2000 or 2500 mm.

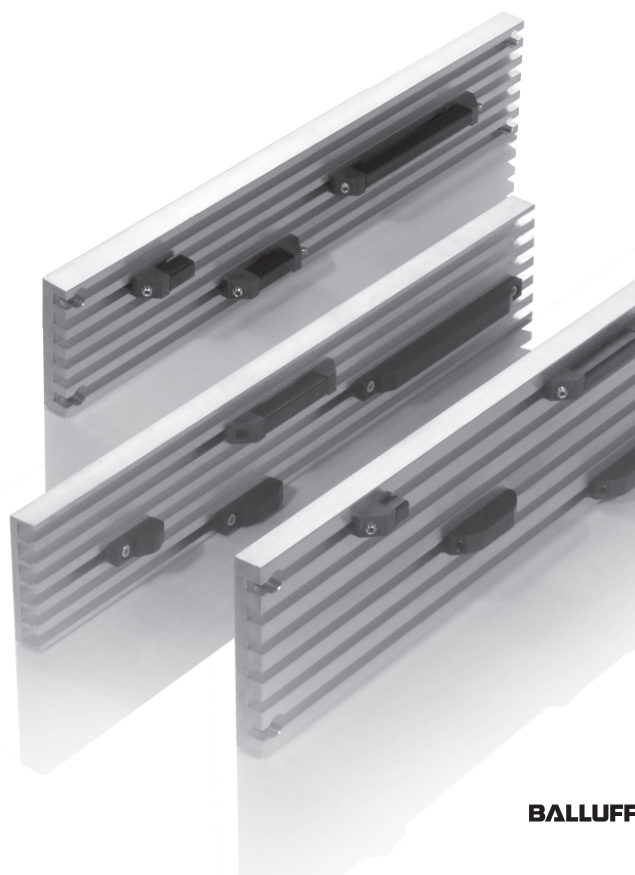

Cam Trays and Cams

Cams for mechanical
single and
multiple position switches

Type

BNN 520-81-S- _ _ _

for switches with switch position spacing **8 mm** or **10 mm**


For use with BNL 5304-080-... or

BNL 5306/5308-100-...

Form A

Form B

PX1820

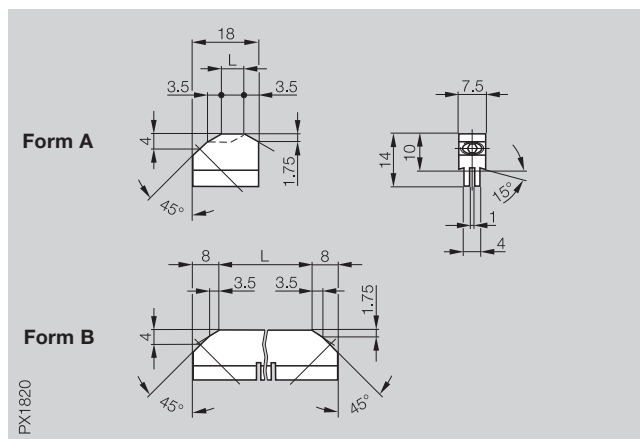

Ordering code

Form A

L

BNN 520-81-S-0

0

BNN 520-81-S-6,5

6.5

Ordering code

Form B

L

BNN 520-81-S-20

20

BNN 520-81-S-40

40

BNN 520-81-S-60

60

BNN 520-81-S-80

80

BNN 520-81-S-145

145

Dimensions in mm

L = Length of switching surface. Additional lengths on request.

Material: Steel with hardened and burnished surface.

Mounting possibilities for cams

Note!


- BNN 520-UA/UB
When a set screw is tightened, the cam is clamped firmly in the slot.
- BNN 520-81-S
When a set screw is tightened, the lower part of the cam is spread apart and the cam held firmly in place.
- BNN 520-TA/TB
When a clamping nut is tightened, the cam is clamped firmly in the T-slot.

Cams for safety switch positions must be installed to fit.

A tight connection such as is necessary for safety switch positions can be made by the customer with our cams using screws, pins or by welding.

BNN 520-UA-_, BNN 520-UB-__ per DIN 69639

for switches with switch position spacing **12 mm** and **16 mm**
For use with BNL 5304/5307-120/160-...

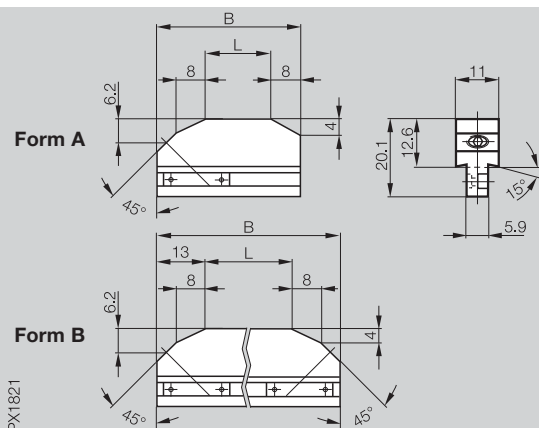

Form A


	B	L
BNN 520-UA-0	21	0
BNN 520-UA-4	25	4
BNN 520-UA-10	31	10
BNN 520-UA-16	37	16

Form B

	B	L
BNN 520-UB-25	51	25
BNN 520-UB-40	66	40
BNN 520-UB-63	89	63
BNN 520-UB-100	126	100
BNN 520-UB-120	146	120
BNN 520-UB-150	176	150
BNN 520-UB-200	226	200
BNN 520-UB-250	276	250
BNN 520-UB-300	326	300
BNN 520-UB-400	426	400

BNN 520-TA-_, BNN 520-TB-__ per DIN 69639

for switches with switch position spacing **12 mm** and **16 mm**
For use with BNL 5310-120-...

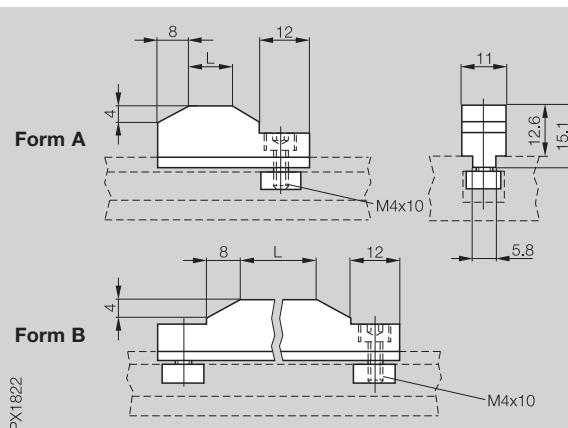


Form A

	L
BNN 520-TA-0	0
BNN 520-TA-4	4
BNN 520-TA-10	10
BNN 520-TA-16	16

Form B

	L
BNN 520-TB-25	25
BNN 520-TB-40	40
BNN 520-TB-63	63
BNN 520-TB-100	100

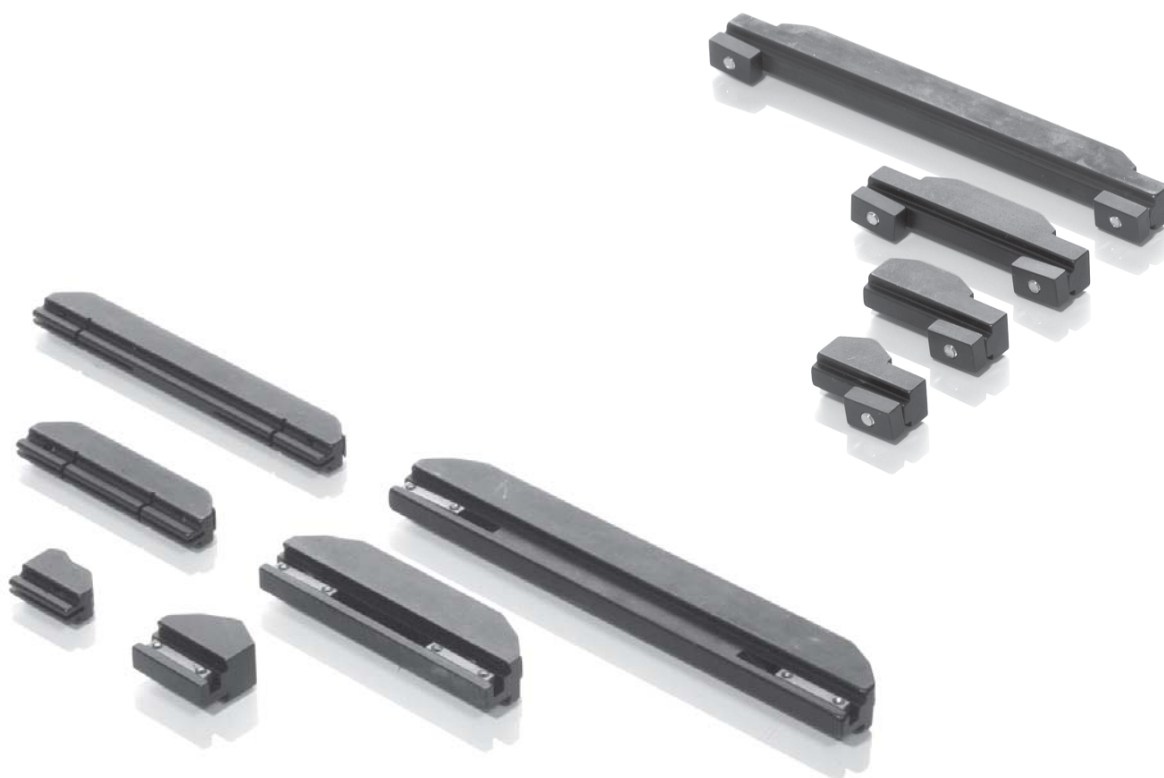

Mounting possibilities for
cams

- BEN 516-13
When a set screw is
tightened, the cam is
clamped firmly in a
T-slot of the cam tray.
- BEN 516-14/19
When a set screw is
tightened, the cam is
clamped firmly in a
U-shaped slot of the
cam tray.

Note!

Cams for safety switch
positions must be installed
to fit.

A tight connection such as is
necessary for safety switch
positions can be made by
the customer with our cams
using screws, pins or by
welding.


Type	

Ordering code	

Ordering code	


Dimensions in mm

L = Length of switching surface.
Additional lengths on request.

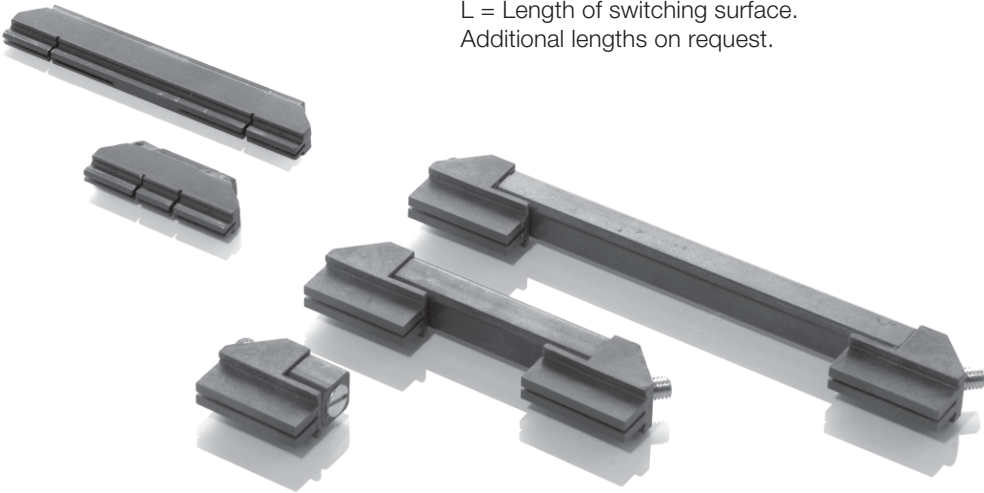

BEN 516-19

For switches with switch position spacing
8 mm and 10 mm
For use with BNL 5304-080-...

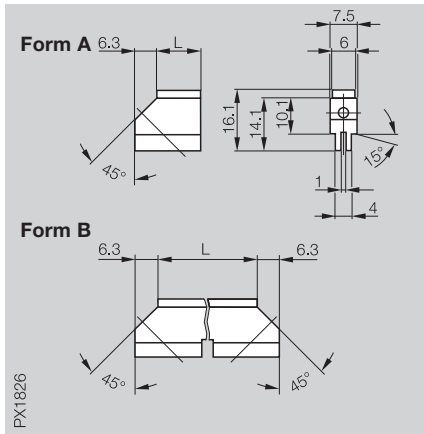


Form A	L
BEN 516-19-10	10
BEN 516-19-15	15

Form B	L
BEN 516-19-20	20
BEN 516-19-30	30
BEN 516-19-40	40
BEN 516-19-50	50
BEN 516-19-60	60
BEN 516-19-80	80
BEN 516-19-100	100
BEN 516-19-120	120

Material: Steel with burnished surface.

BEN 516-14

For switches with switch position spacing
12 mm and 16 mm
For use with BNL 5304/5307-120/160-...

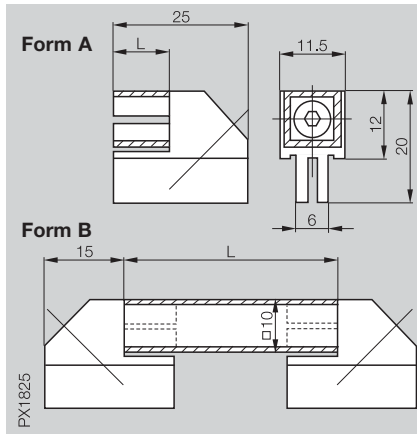


Form A	L
BEN 516-14-10	10
BEN 516-14-20	20

Form B	L
BEN 516-14-30	30
BEN 516-14-50	50
BEN 516-14-100	100
BEN 516-14-120	120
BEN 516-14-140	140
BEN 516-14-160	160
BEN 516-14-180	180
BEN 516-14-200	200

Material: Steel damping element
with burnished surface and base made
of PA 6.6.

BEN 516-13


For switches with switch position spacing
12 mm and 16 mm
For use with BNL 5310-120-...

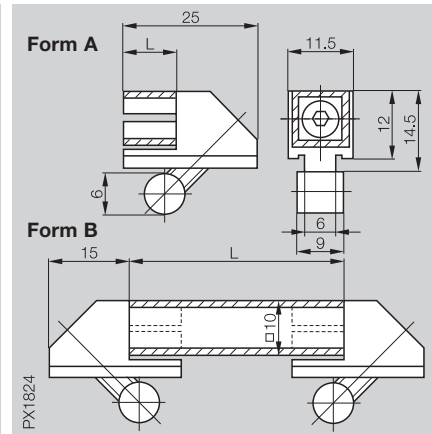


Form A	L
BEN 516-13-10	10
BEN 516-13-20	20

Form B	L
BEN 516-13-30	30
BEN 516-13-50	50
BEN 516-13-100	100
BEN 516-13-120	120
BEN 516-13-140	140
BEN 516-13-160	160
BEN 516-13-180	180
BEN 516-13-200	200

Material: Steel damping element
with burnished surface and base made
of PA 6.6.

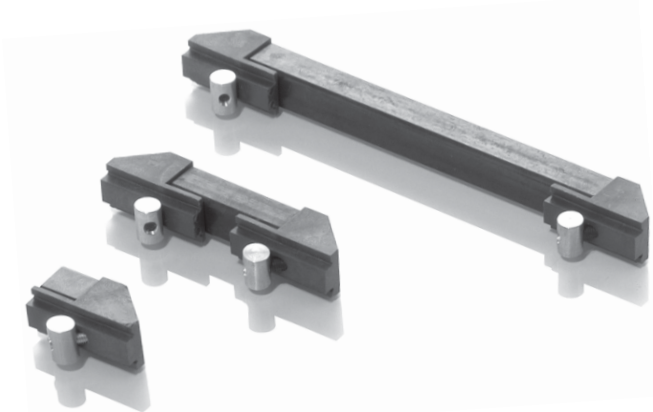

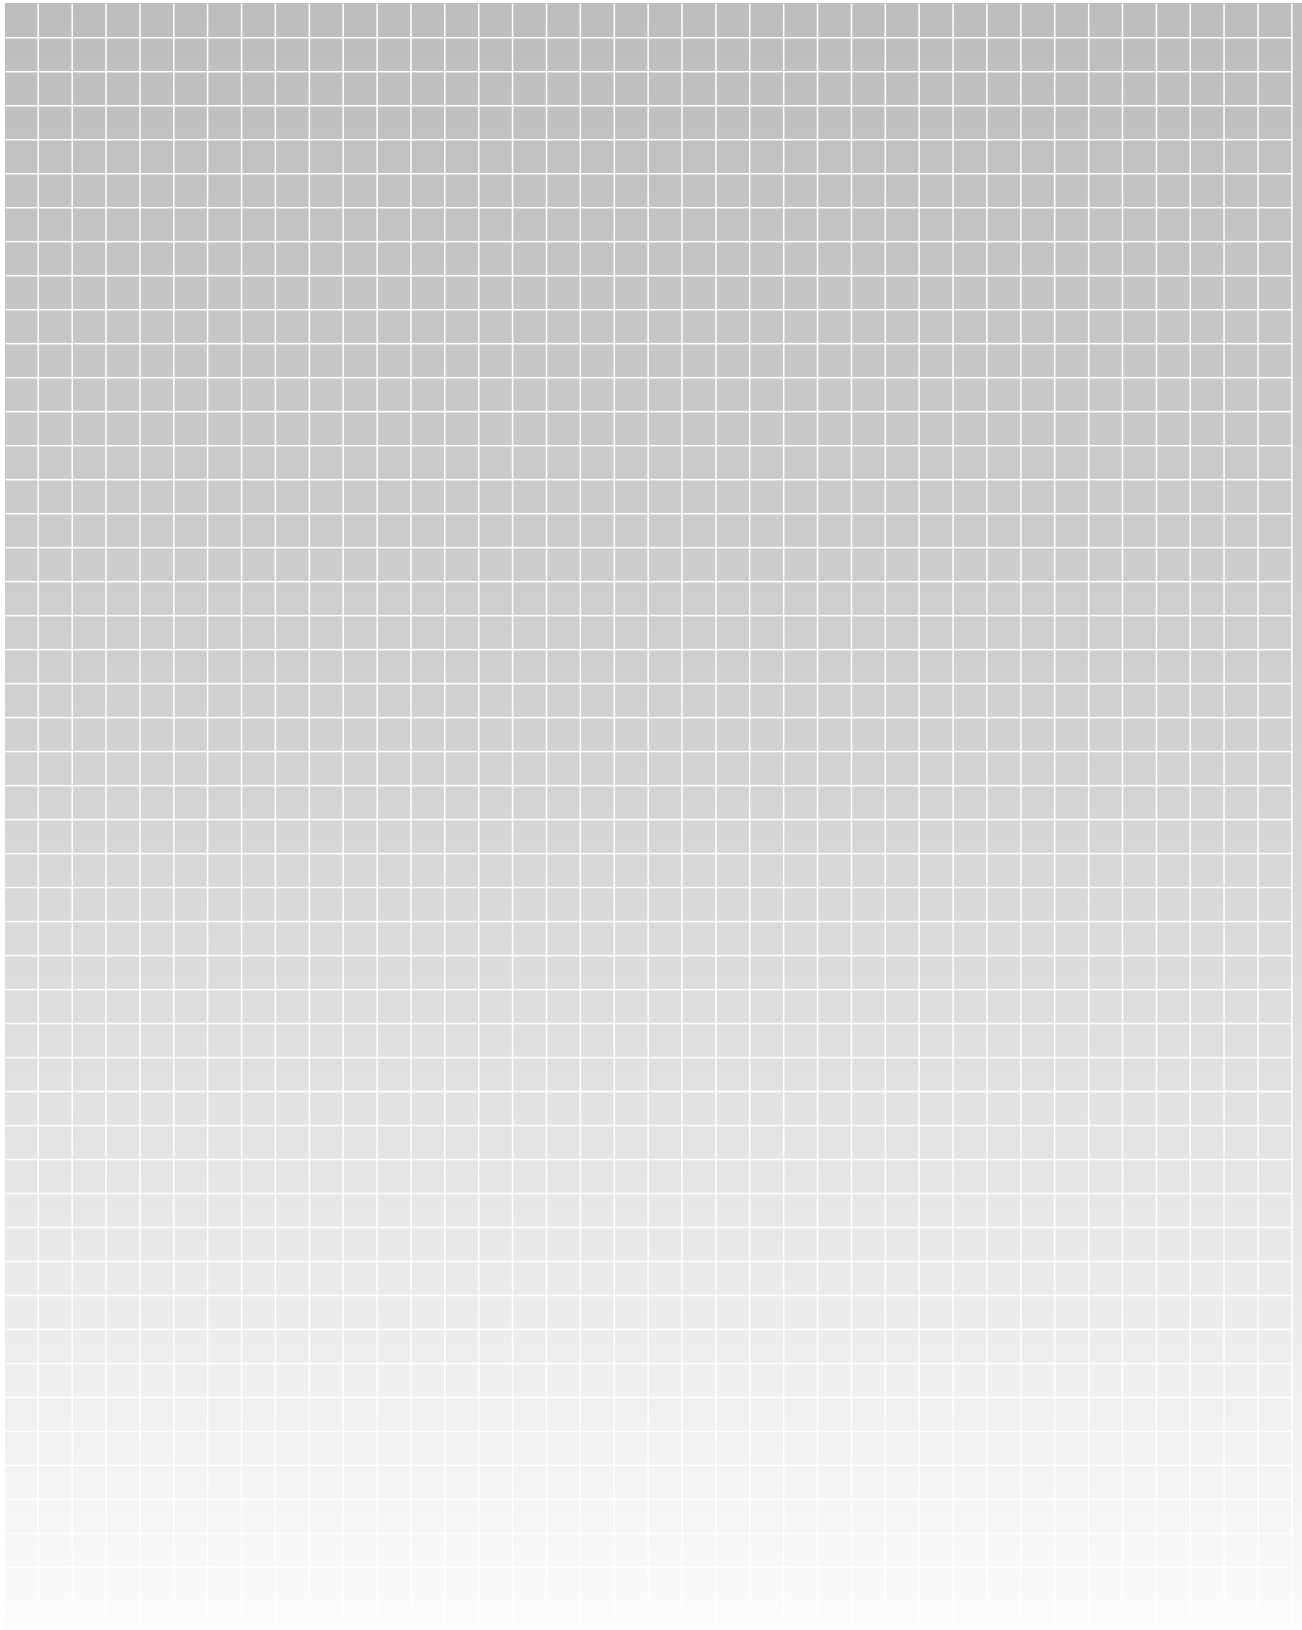

132	AC/DC connectors, DC connectors
134	Function indicators FD, FE, FC




more added value

- Complete solutions from one source
- Sensors and accessories ideally matched



5.3

Connector	BKS-S 80	BKS-S 80	BKS-S 90
Version	Straight female	Right angle female	Straight female
Use	BNS ...-S80	BNS ...-S80	BNS ...-S90

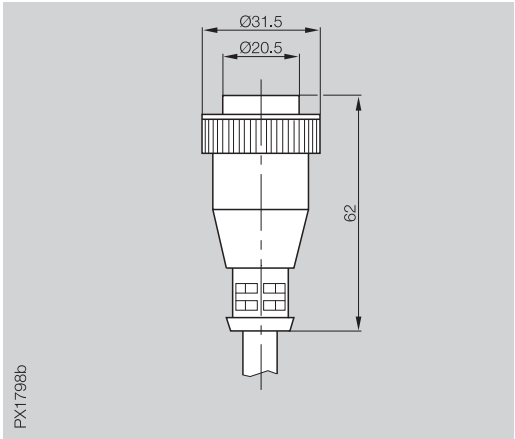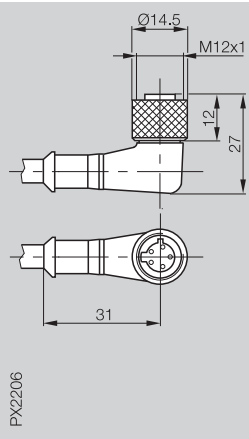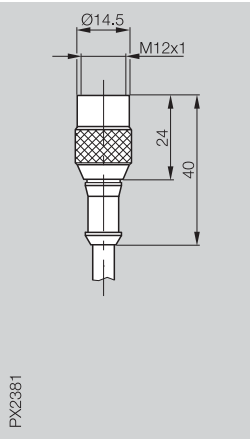

12-pin			BKS-S 90-G-PU-__
5-pin	BKS-S 80-G-PU-05	BKS-S 80-W-PU-05	
4-pin			
3-pin			
Supply voltage U _B	300 V AC/10...60 V DC	300 V AC/10...60 V DC	300 V AC/DC (max. 2 A)
Cable	5 m molded-on PUR	5 m molded-on PUR	6 m/15 m molded-on PUR
No. of wires × cross-section	5×0.5 mm ²	5×0.5 mm ²	12×0.5 mm ²
Degree of protection per IEC 60529	IP 67	IP 68 per BWN Pr. 20	IP 67
Ambient temperature range T _a	-25...+90 °C	-25...+90 °C	-25...+90 °C
View of female side			

Note!

Standard configuration is normally open.
Other pin assignments on request.









If there are multiple switch positions, multiple connectors or larger connectors with a larger number of pins are used.

Please include cable length in ordering code!
6 m = 06/15 m = 15



M12 Connectors

DC connectors

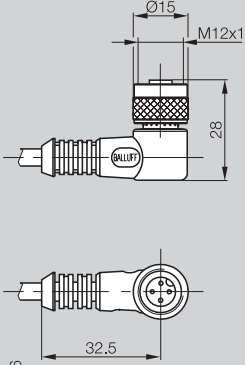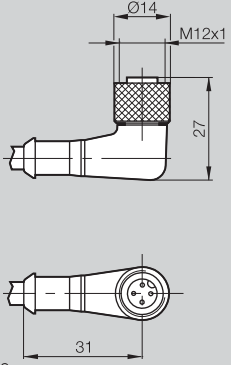BKS-B 19 Straight female BNS ...-S4_-I (IO-Link)		BKS-S 19 Straight female BNS ...-S4_-I (IO-Link)		BKS-B 20 Right angle female BNS ...-S4_-I (IO-Link)		BKS-S 20 Right angle female BNS ...-S4_-I (IO-Link)	
							
BKS-B 19-3-05 BKS-B 19-1-03		BKS-S 19-3-PU-03 BKS-S 19-1-PU-03		BKS-B 20-1-03		BKS-S 20-3-PU-03 BKS-S 20-1-PU-03	
10...30 V DC 3 m/5 m molded-on PVC 3x0.34 mm²/4x0.34 mm² IP 67 -25...+85 °C		10...30 V DC 3 m molded PUR 3x0.34 mm²/4x0.34 mm² IP 68 per BWN Pr. 20 -25...+70 °C		10...30 V DC 3 m molded PVC 3x0.34 mm² IP 67 -25...+85 °C		10...30 V DC 3 m molded PUR 3x0.34 mm²/4x0.34 mm² IP 68 per BWN Pr. 20 -25...+70 °C	
							



Other cable lengths on request.

5.3

Function indicators FD, FE, FC

Technical drawing of the PX1799a LED module. The top view shows a rectangular module with a width of 45mm and a height of 18mm. An LED is mounted on the top surface. The side view shows a mounting bracket with a diameter of 7mm (Ø7), an M6 screw hole, a 3mm gap, and a total height of 16.5mm. The cable length is 120mm.

The top image shows two views of a black plastic snap switch assembly. The top view shows a dovetail-shaped guide with a central slot and two side slots. The bottom view shows the internal components, including a central foot and two side feet. The text "FD 510 870" and "B-BOY AC/DC" is visible on the top view. The bottom view shows the internal components, including a central foot and two side feet. The text "FD 510 870" and "B-BOY AC/DC" is visible on the top view.


The bottom image shows a cable with a connector. The connector is a cylindrical metal fitting with a central pin and a surrounding ring. The cable is black and has a braided shield. The text "FD 510 870" and "B-BOY AC/DC" is visible on the top view.

BALLUFF

sensors worldwide



Object Detection



Linear Position Sensing



Industrial Identification



Industrial Networking and Connectivity



Mechanical Accessories

Balluff GmbH
Schurwaldstrasse 9
73765 Neuhausen a.d.F.
Germany
Phone +49 7158 173-0
Fax +49 7158 5010
balluff@balluff.de

 **www.balluff.com**

