



Data Sheet

Color Camera CCC 102




When connected to a DP600 series graphical display terminal, the CCC 102 Color Camera provides clear and precise video monitoring for your mobile applications.

- Compact design- fits easily in small spaces
- Shockproof, vibration resistant and corrosion resistant camera housing
- Chemically hardened glass resists breakage, scratches and damage
- Auto-activated heated lens prevents frost and fogging


Technical Data

| | | |
|----------------------|------------------------------|---|
| Camera/ Video | Recording Element | Color ¼ inch solid state CCD (Charge Coupled Device) |
| | Pixels | 542x586 (HxW) |
| | TV System Type | PAL video standard |
| Lens/ Glass | Lens Type | 2.1 mm [0.08 in], fixed focal length Minimum object distance: 0.1 m [3.93 in] |
| | Lens Glass | Chemically hardened and tempered float glass |
| | Field of Vision | 102° width field of vision Max mounting bracket angle: ± 95° horizontal, ± 71° vertical |
| | Light Sensitivity | 0.5 lux (at f1.2, 5600k) |
| Housing/ Hardware | Housing | Gas filled anodized black aluminum UV resistant; Light fastness: >8 DIN 50021 salt spray tested Waterproof to 25 m [82.02 ft] Able to withstand high-pressure cleaning (according to SAE J1455 & IP69 rating) |
| | Extension Cable | 11 m [36.08 ft.] 75 Ohm cable with 4 pin female connector Cable weight: 1.22 kg [2.69 lb] |
| | Shock & Vibration | 15 g rms (with bracket attached) post-thermal cycle 24–2000 Hz random |
| | Weight | 230 g [8.11 oz] (with bracket) 300 g [10.58 oz] total shipping weight |
| Power/ Temp | Power Input | 11.1–16.1 V DC Camera will not function below 10 V DC Extreme voltage protection to 28 V DC |
| | Power Consumption | Heating off: 100 mA Heating on: 250 mA (heating activated at <15° C [59° F]) |
| | Connectors | 0.5m cable with 4–pin male connector (camera power input and video output) IP69 rated connector |
| | Operating temperature | –40° C – 75° C [–40° F – 167° F] |

Installation and Mounting Information

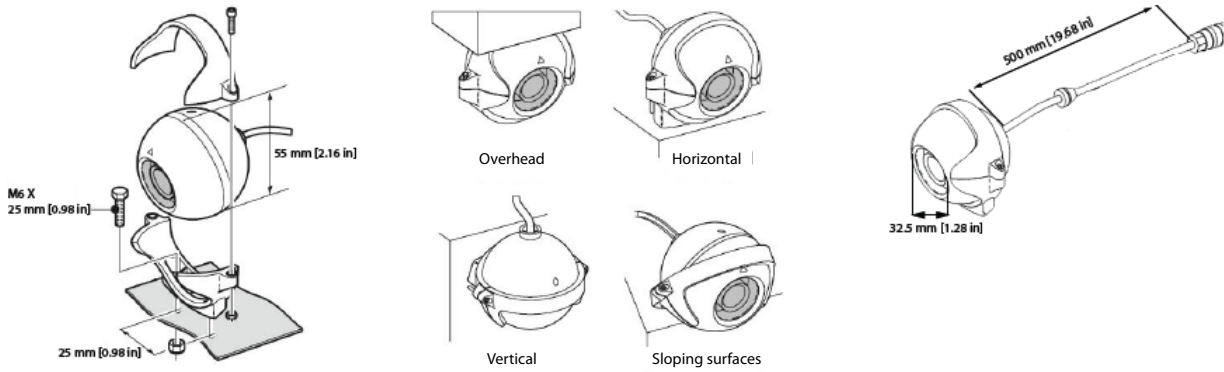

Pin Breakout

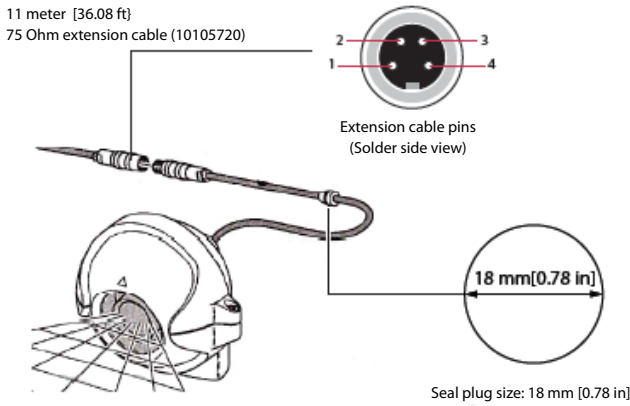

Camera Connector Cable Pin Breakout

| Pin Number | Wire Color | Description |
|------------|----------------|------------------|
| 1 | Coaxial core | PAL video signal |
| 2 | Coaxial screen | Video ground |
| 3 | Red | 12V DC feed |
| 4 | Black | Ground feed |

10105720 Extension Cable Wiring Specification

Cable Color Coding

| Item | Description |
|------|-------------|
| 1 | white |
| 2 | brown |
| 3 | black |
| 4 | blue |
| 5 | grey |

10105720 Extension Cable Specifications

| Item | Description |
|-------------------|------------------------------|
| Wire gauge | 5 × 0.25 mm ² |
| Composition | 14 × 0.15 Cu |
| Resistance | 75 Ω |
| Insulation | PVC |
| Temperature range | -5° C – 70° C [23°F– 158° F] |

Ordering Information

CCC102 Color Camera and related accessories

| | |
|-------------------------------|----------|
| CCC102 Camera | 10100831 |
| CCC102 Extension cable (11 m) | 10105720 |
| Mating Binder connector | 10105940 |

Note: This camera should only be used as a visual aid and never as a stand-alone safety device. Danfoss assumes no liability for damages caused by misinterpretation, defects or improper functioning.

Danfoss Power Solutions US Company
 2800 East 13th Street
 Ames, IA 50010, USA
 Phone: +1 515 239 6000

Danfoss Power Solutions GmbH & Co. OHG
 Krokamp 35
 D-24539 Neumünster, Germany
 Phone: +49 4321 871 0

Danfoss Power Solutions ApS
 Nordborgvej 81
 DK-6430 Nordborg, Denmark
 Phone: +45 7488 2222

Danfoss Power Solutions (Shanghai) Co. Ltd.
 Building #22, No. 1000 Jin Hai Rd
 Jin Qiao, Pudong New District
 Shanghai, China 201206
 Phone: +86 21 3418 5200

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.