

**POWERFUL LARGE BACKLIGHT,
WITH SWITCHABLE BLACK BACKGROUND**



Many machine vision systems are not made of 1 single light, but of many different illuminations. And, quite often, LED panels can disturb the camera and the other lights efficiency, because they are equipped with a white diffuser, when a dark background would be required.

The Black & Light (Bn'L) by TPL Vision is an innovative solution, that can be integrated in most applications. Equipped with high brightness LEDs, once it is switched on, it perfectly highlights the shape of the products you need to control.

And, as soon as it is off, it becomes a dark background, that helps the other illuminations to work properly. Moreover, the matt materials help to absorb the extra light, and to enhance the inspection process.

WITH THE BN'L, DISCOVER THE DARK SIDE OF BACKLIGHTS !

3 VERSIONS

Besides the **Standard version**, there are 2 other versions:

OVERDRIVE
VERSION

Power customisable by the user, overdrive up to **x 3**

TRINITI
VERSION

Light managed by a remote controller overdrive up to **x 6**

BLACK BACKGROUND WHEN IT'S OFF



WHITE BACKGROUND WHEN IT'S ON



TECHNICAL SPECIFICATIONS

	BnL		BnL OVERDRIVE		BnL TRINITI / BnL EXPERT	
Electronics						
Power supply	24 VDC +/-10%				External current controller (not supplied)	
Functioning mode	Continuous or strobe					
Strobe input	PNP : From 5 to 24V for 100% ON. From 0 to 1V for 100% OFF. NPN : less than 1V for 100% ON. Above 2V for 100% OFF. Max 20V.				N/A	
Overdrive	No		yes		According to power supply	
Strobe Conditions (On time, duty cycle)	No restriction		3ms @ 10% at max power		300µs @ 5% at max power	
Dimming	Potentiometer 20-100%				N/A	
Maximum rising time	25 µs				According to power supply	
Maximum falling time	15 µs				According to power supply	
Wiring	Surface ≤ 0,5m ² : 1 connector M12 T-Power 12A 4 poles or 1 cable 4x1.5 ²	Surface > 0,5m ² : 1 cable 4x1.5 ²	Surface ≤ 0,25m ² : 1 connector M12 T-Power 12A 4 poles or 1 cable 4x1.5 ²	0,25m ² < Surface < 0,88m ² : 1 connector M12 T-Power 12A 4 poles and 1 cable 4x1.5 ²	Surface ≤ 0,25m ² : 1 cable 4x1.5 ²	0,25m ² < Surface < 0,5m ² : 2 cables 4x1.5 ²
Power supply cable(s) max length	Wire M12 : 10m (not supplied) Cable : 10m	10m	Wire M12 : 10m (not supplied) Cable : 10m	Wire M12 : 10m (not supplied) Cable : 10m	10m	10m
Max consumption	1.32W par 25cm ² in peak and on average		3W/25cm ² in peak max 0.43W/25cm ² max on average (3ms@10%)		7.8W/25cm ² in peak max 0.54W/25cm ² max on average (300µs@5%)	
Optics						
Colour	White, Red, Green, Blue, Infrared					
Mechanics						
Thickness (mm)	45mm					
Surface	Mini 200x200mm – Max surface 0.88m ² Max length 1.9m – Max perimeter 4.5m	Mini 200x200mm – Max surface 0.88m ² Max length 1.9m - Max perimeter 4.5m	Mini 200x200mm – Max surface 0.88m ² Max length 1.9m - Max perimeter 4.5m	Mini 200x200mm – Max surface 0.5m ² Max length 1.9m - Max perimeter 4.5m	Mini 200x200mm – Max surface 0.5m ² Max length 1.9m - Max perimeter 4.5m	Mini 200x200mm – Max surface 0.5m ² Max length 1.9m - Max perimeter 4.5m
Weight	13 Kg/m ² +/-15%					
Body materials	Aluminum and loaded ABS					
Diffuser	Black PMMA					
Fixing	4 M4 nuts (supplied) to insert in the groove or 4 M3x20 screws (not supplied)					
Environment						
Operating temperature	-10° to +40°C / 80% of humidity without condensation / No thermal shock (max temperature variation: 10°C in 24h)					
Storage temperature	-20° to +60°C / 80% of humidity without condensation / No thermal shock (max temperature variation: 10°C in 24h)					
IP protection	IP 40					
Labels	RoHS-CE-DEEE					

LIGHTING POWER

Distance	STANDARD	OVERDRIVE
0 m	2 800 Lux	6 500 Lux

Measurements taken with a Black & Light 40x40 WHI (+/-10%).



RELATED PRODUCTS

M12 female T-POWER 4 pins cable	
2 meters	Ref: C-M12-4P-T-2M
5 meters	Ref: C-M12-4P-T-5M
10 meters	Ref: C-M12-4P-T-10M

MOUNTING DEVICE
Ref: TPL-MOUNT-MBACK-SQUARE1

HOW TO BUILD YOUR REFERENCE

BNL	VERSION	L LENGTH (CM)	W WIDTH (CM)	COLOUR
	STANDARD	20	20	WHI
	O OVERDRIVE	30	30	630
	ET TRINITI	40	40	525
	E EXPERT	50	50	470
		60	60	850
		70	70	
		80	80	
		90	90	
		100		
		110		
		120		
		130		
		140		
		150		
		160		
		170		
		180		
		190		

The first figure shall always be the biggest one.

WIRING 1		WIRING 2	
TYPE 1	POSITION	TYPE 2	POSITION
M CONNECTOR M12*	1	A CABLE 2.5 m	1
A CABLE 2.5 m	2	B CABLE 5 m	2
B CABLE 5 m	3	C CABLE 10 m	3
C CABLE 10 m	4		4
			5
			6
			7
			8


*T-Power M12 connector for STANDARD and OVERDRIVE versions only

The position of wiring 2 must be different from the position of wiring 1.

WIRING CHOICE

STANDARD	OVERDRIVE	EXPERT
SURFACE ≤ 0.5M² 1 wiring	SURFACE ≤ 0.25M² 1 wiring	SURFACE ≤ 0.25M² 1 wiring
Connector M12 T-Power Cable 2.50m 5m 10m	Connector M12 T-Power Cable 2.50m 5m 10m	Cable 2.50m 5m 10m
SURFACE > 0.5M² 1 wiring	0.25M² < S. < 0.88M² 2 wirings	0.25M² < S. < 0.5M² 2 wirings
Cable 2.50m 5m 10m	Connector M12 T-Power Cable 2.50m 5m 10m	Cable 2.50m 5m 10m Cable 2.50m 5m 10m

POSITION CHOICE

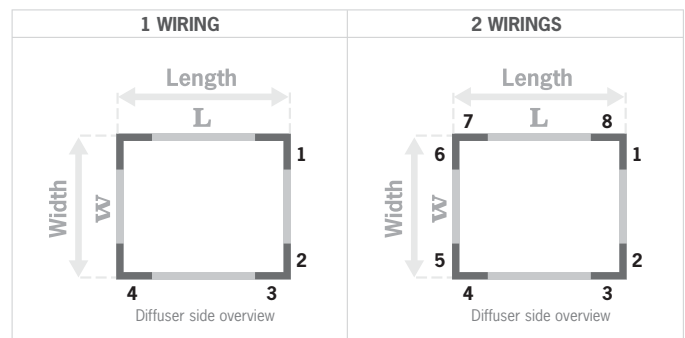

REFERENCE EXAMPLES:

BNL STANDARD 30x20 cm White LED Connector M12 T-Power position n°4: ➔ **BNL-3020-WHI-M4**

BNL OVERDRIVE 80x50 cm Red LED Connector M12 T-Power position n°1 Cable 2.50 meters position n°5: ➔ **BNL-O-8050-630-M1A5**

BNL TRINITI 60x60 cm Blue LED Cable 10 meters position n°2 Cable 5 meters position n°8: ➔ **BNL-ET-6060-470-C2B8**

Features and presentations liable to modifications without prior notice. A-2 version, 2017/11 Edition



Other available documents :

- PDF, DWG, DXF, IGS, STEP & X_Y DRAWINGS
- USER'S GUIDE

