



Data Sheet

Heavy Duty Pressure Transmitter MBS1250



Principle of Operation

The pressure transmitter converts measured pressure into a linear temperature-compensated output signal that is proportional to the transmitter supply voltage. The output signal varies between 10 and 90% of the supply voltage.

This output signal is well suited for direct connection to an A/D converter provided that the transmitter and the ratiometrically coupled A/D converter use the same voltage reference. Danfoss PLUS+1® and other microcontrollers use ratiometric A/D conversion.

Integrated Pulse Snubber


The heavy duty pressure transmitter with an integrated pulse snubber is specially suited for hydraulic applications where cavitation, liquid hammer, or pressure peaks may occur. The pressure peaks are often short but in extreme excess of the measuring range of the transmitter.

The integrated pulse snubber is principally a nozzle in the passage between the measured medium and the pressure sensitive element of the transmitter.

Features

- Integrated Deutsch® DT-04 electrical connector
- SAE 4, SAE 6, and G1/4 pressure connections
- Six pressure ranges available
- PLUS+1 Compliant
- Resistant to cavitation, liquid hammer, and pressure peaks
- Overload pressure up to 3 times measuring range
- Durability: >10 million cycles
- For use in severe environments
 - High vibration stability
 - IP 67 environmental sealing
 - Wetted parts and enclosure of stainless steel
- CE marked: EMC protected in accordance with EU EMC directive
- Temperature compensated
- Ratiometric output signal: 10 to 90% of supply voltage
- Accuracy: 0.5% full scale

Mounting Dimensions

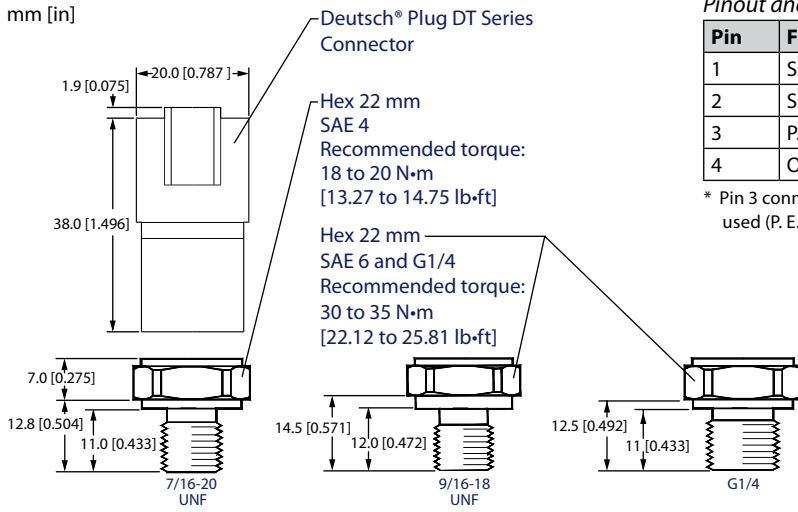


Pinout and Wiring Information

Pin	Function
1	Supply -
2	Supply +
3	P. E. (not used)*
4	Output +

* Pin 3 connected to case; typically not used (P. E. = protective earth).

4 pin Deutsch® Receptacle DT-04



2398

2397

Specifications

Pressure Connection

Thread Versions	
SAE 4	7/16-20 UNF-2A (SAE - 4 J514) including viton O-ring
SAE 6	9/16-18 UNF (SAE - J1926-2) including viton O-ring
G1/4	G1/4 DIN 3852-E including viton O-ring

Performance (EN 60770)

Accuracy (including non-linearity, hysteresis and repeatability)	< ± 0.5 % full scale
Thermal zero point shift	< ± 0.15% full scale/ 10K
Thermal sensitivity (span) shift	< ± 0.15% full scale/ 10K
Hysteresis and repeatability	< ± 0.1% full scale
Response time liquids (10 to 90%)	< 1 ms
Overload pressure (static)	2.5 x full scale
Burst pressure	> 4000 bar
Durability, P: 10 to 90% full scale	>10 x 10 ⁶ cycles

Electrical Characteristics

Nominal output signal (short-circuit protected)	Ratiometric 10 to 90% of supply
Supply voltage—V supply (polarity protected)	5 Vdc ± 0.5 Vdc
Current consumption	4.5 mA
Load resistance (R_L)	R _L > 5 kΩ
Output impedance	R _L < 90 Ω

Mechanical Characteristics

Wetted parts, material	17-4PH
Enclosure material	EN 10088-1 (1.4404) / AISI316L
Weight	0.2 kg

Environmental Parameters

Operating and storage temperature range	
--	--

-40 to +125 °C [-40 to 257 °F]	
EMC- emission	
EN 61000-6-3	
EMC- immunity	
EN 61000-6-2	
Vibration stability	
Sinusoidal, 20g, 10 Hz - 2 kHz	EN 60068-2-27
Shock resistance	
100 g	IEC 60068-2-6
Enclosure	
IP 67	

Ordering Information

Pressure Connection

Measuring range	Danfoss material number		
	SAE 4	SAE 6	G1/4
0 to 40 bar [580 psi]	11044499	11044545	11044551
0 to 160 bar [2320 psi]	11044500	11044546	11044562
0 to 250 bar [3626 psi]	11044501	11044547	11044563
0 to 400 bar [5800 psi]	11044542	11044548	11044564
0 to 500 bar [7250 psi]	11044543	11044549	11044565
0 to 600 bar [8700 psi]	11044544	11044550	11044566

Related Product

Mating connector	Danfoss material number
4 pin Deutsch® Plug DT-06-45-E003 Series bag assembly	11028348

Danfoss product literature is on line at: www.danfoss.com

Danfoss Power Solutions US Company
2800 East 13th Street
Ames, IA 50010, USA
Phone: +1 515 239 6000

Danfoss Power Solutions GmbH & Co. OHG
Krokamp 35
D-24539 Neumünster, Germany
Phone: +49 4321 871 0

Danfoss Power Solutions ApS
Nordborgvej 81
DK-6430 Nordborg, Denmark
Phone: +45 7488 2222

Danfoss Power Solutions (Shanghai) Co. Ltd.
Building #22, No. 1000 Jin Hai Rd
Jin Qiao, Pudong New District
Shanghai, China 201206
Phone: +86 21 3418 5200

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.