


# Principles

In this section you will learn about the basic concepts, technical details, application conditions, standards, etc. for the inductive sensor group.

- 1.0.2 Function descriptions, definitions
- 1.0.3 Delay times, temperature effects and limits, Magnetic field immunity
- 1.0.4 Electrical parameters
- 1.0.5 Electrical parameters, output circuits
- 1.0.6 Wiring diagrams
- 1.0.7 Series and parallel connection, Utilization categories
- 1.0.8 Protection circuits
- 1.0.9 Response curves
- 1.0.10 Switching distances
- 1.0.11 Installation
- 1.0.14 Materials
- 1.0.16 Cable types, tightening torques, removal clearance, housing tolerances
- 1.0.17 Quality
- 1.0.18 Standards
- 1.0.20 Product overview

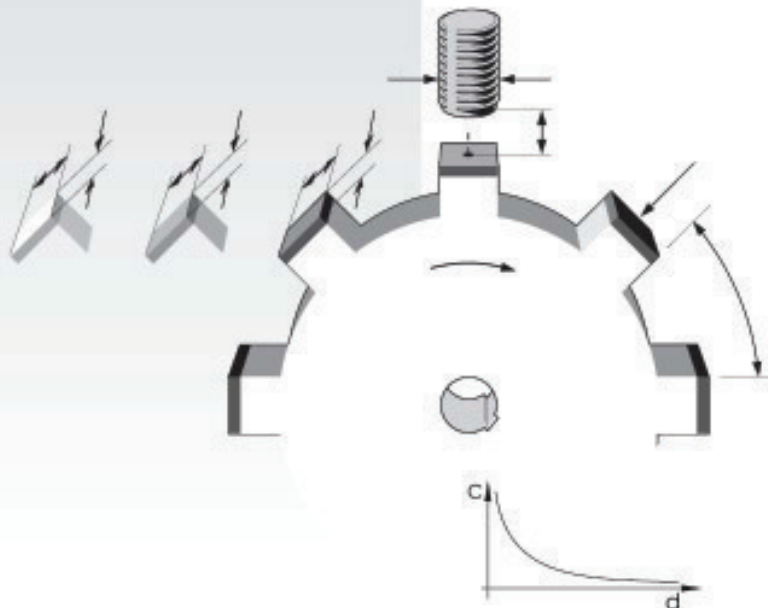

### Principle


... of inductive proximity sensors is based on the interaction between metallic conductors and an electromagnetic alternating field.

Eddy currents are induced in the metallic damping material, which removes energy from the field and reduces the height of the oscillation

amplitude. This change is processed in the inductive sensor, which changes its output state accordingly.

### Function groups


... of the Balluff proximity switch are:

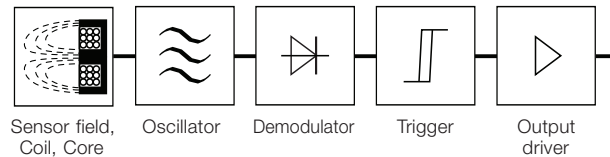

### Sensing face

... is the area through which the high-frequency sensor field enters the air space. It is determined primarily by

the base of the shell core and corresponds roughly to the surface area of the shell core cap.




### Standard target

... is a square plate of Fe 360 (ISO 630), used to define sensing distances per EN 60947-5-2. The thickness is  $d = 1 \text{ mm}$ ; and the side length  $a$

corresponds to

- the diameter of the circle of the "sensing face" or
- $3 s_n$ , if the value is greater than the given diameter.



### Correction factor

... gives the reduction in sensing distances for target materials which are not made of Fe 360.

| Material        | Factor      |
|-----------------|-------------|
| steel           | 1.0         |
| copper          | 0.25...0.45 |
| brass           | 0.35...0.50 |
| aluminum        | 0.30...0.45 |
| stainless steel | 0.60...1.00 |
| nickel          | 0.65...0.75 |
| cast iron       | 0.93...1.05 |


### Switching frequency $f$

.. refers to the maximum number of switching operations per second.

Damping is per EN 60947-5-2 with standard targets on a rotating, non-conducting disk. The surface area ratio of iron to non-conductor must be 1 : 2.

The rated value of the switching frequency is reached when

- either the turn-on signal  $t_1 = 50 \mu\text{s}$  or the
- turn-off signal  $t_2 = 50 \mu\text{s}$ .

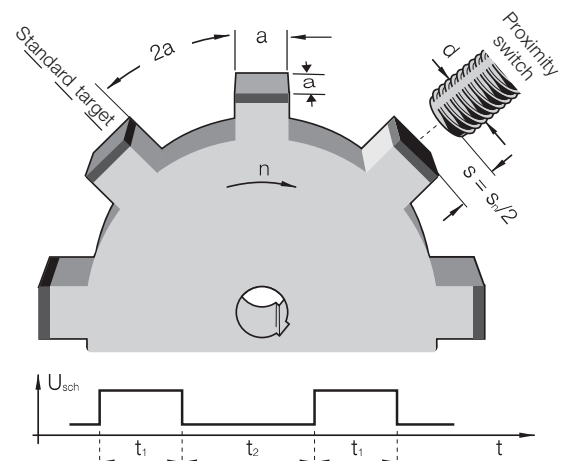

## Delay times

### Start-up delay $t_v$

... is the time from when the supply voltage is applied, and the proximity switch assumes the ready state. This time may not be longer than 300 ms. During this

time there must be no fault signal longer than 2 ms.

## Temperature effects and limits

### Temperature drift

... is the deviation of the effective operating distance with the temperature range

of  $-25\text{ °C} \leq T_a \leq +70\text{ °C}$ .  
Per EN 60947-5-2 it is:  
 $\Delta s_r / s_r \leq 10\%$

### Ambient temperature range $T_a$

... is the temperature range over which the function of


the switch is guaranteed.

## Magnetic field immunity

### Principle

Error-free function depends on the magnitude of the welding current and the distance of the sensor from the current carrying line.

Design and circuitry techniques ensure that magnetic field immune proximity switches remain unaffected by magnetic fields.

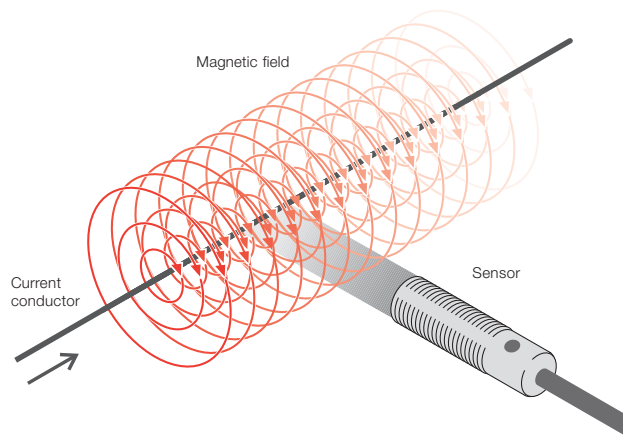

## Supply voltage $U_B$

... is the permissible voltage range in which certain safe operation of the switch

is guaranteed (including ripple  $\sigma$ ).

## Rated operating voltage $U_e$

... is the supply voltage  $U_B$  used for testing without tolerances. To determine the rated and limit values, the sensor must be operated using  $U_e$ .

It is  
– for DC switches  
 **$U_e = 24 V_{DC}$**   
– for AC and AC/DC switches  
 **$U_e = 110 V_{AC}$**

## Voltage drop $U_d$

... is the voltage measured across the load of a closed

(conducting) sensor at load current  $I_e$ .

## Rated insulation voltage $U_i$

... of a proximity switch is the voltage to which the isolation tests and the creep distances are referenced.


For proximity switches the highest rated operating voltage must be considered as the rated insulation voltage.

## Rated supply frequency

... of the power supply for AC devices is 50 to 60 Hz.

## Ripple $\sigma$ (%)

... is the AC voltage (peak-to-peak of  $U_e$ ) overlaid on the DC voltage  $U_e$  given in percent. To operate DC switches a filtered DC voltage having a ripple of max. 15 % (per DIN 41755) is required.

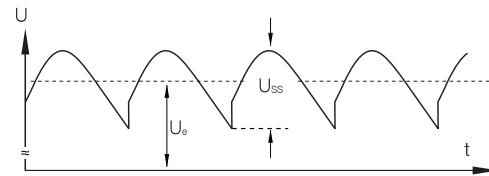

$U_e$  = rated operational voltage  
 $U_{pp}$  = oscillation width

$$\text{Ripple } \sigma = \frac{U_{pp}}{U_e} \times 100 [\%]$$

## Rated operating current $I_e$

... is the permissible constant output current that

may flow through the load  $R_L$ .

## Off-state current $I_r$

... is the residual current flowing through the load

when a proximity switch is not conducting (open).

## Inrush-current $I_k$

... in the case of alternating current indicates the current  $I_k (A_{eff})$  which is permitted to

flow during a given turn-on time  $t_k$  (ms) and at a given frequency (Hz).

## Short circuit current

... is 100 A, i. e., per EN 60947-5-2 the power supply during testing in short circuit mode must be able to provide at least 100 A for a

short duration. This current is prescribed in the standard in order to test the short-circuit strength.

## No-load supply current $I_0$

... is the current, which flows in the switch, without the need for a load to be connected (only with 3- and

4-wire-switches). This current supplies the sensor electronics.



### Minimum operating current $I_m$

... is the smallest load current required for function of the switch when ON.

### Output resistance $R_a$

... is the resistance between the output and the supply voltage which is built into the switch; see „Output circuits“.

### Load capacitance

... is the permissible total capacitance on the output of the switch, including line capacitance.



## Output circuits

### Driver stages

3-wire  
DC switches

PNP, sourcing  
(current source)


NPN, sinking  
(current sink)



S = semiconductor switch  
 $R_a$  = output resistance  
 $D_z$  = Z-Diode, limiter  
 $D_1$  = pol. rev. protect. diode  
 $D_2$  = pol. rev. protect. diode in load current circuit (for short protection types only)  
 LED = light emitting diode


2-wire  
DC switches

Non-polarized



S = semiconductor switch  
 $D_z$  = Z-Diode, limiter  
 C = capacitor  
 Gl = bridge rectifier  
 LED = light emitting diode

2-wire  
AC and AC/DC switches  
(universal current switches)

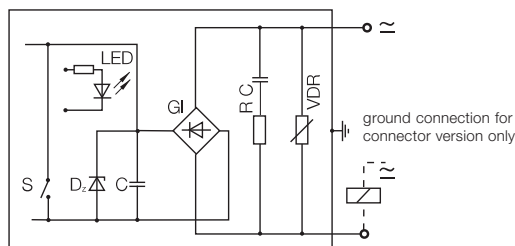


S = semiconductor switch  
 $D_z$  = Z-Diode, limiter  
 C = filter capacitor  
 RC = HF-Peak-limiter  
 Gl = bridge rectifier  
 LED = light emitting diode  
 VDR = voltage spike limiter

|                                                   | Cable/terminals         | Connector | Cable/terminals        | Connector |
|---------------------------------------------------|-------------------------|-----------|------------------------|-----------|
| <b>DC 3-/4-wire</b>                               |                         |           |                        |           |
| Normally-open                                     | <b>PNP (+) sourcing</b> |           | <b>NPN (-) sinking</b> |           |
|                                                   | ①                       |           | ④                      |           |
|                                                   | ②                       |           | ⑤                      |           |
| Complementary                                     | ③                       |           | ⑥                      |           |
| <b>DC 2-wire</b>                                  |                         |           |                        |           |
| Normally-open                                     | <b>polarized</b>        |           | <b>non-polarized</b>   |           |
|                                                   | ⑦                       |           | ⑨                      |           |
| Normally-closed                                   | ⑧                       |           | ⑩                      |           |
| <b>AC-switches</b>                                |                         |           |                        |           |
| Normally-open                                     | ⑪                       |           |                        |           |
| <b>AC/DC-switches</b>                             |                         |           |                        |           |
| Normally-open                                     | ⑬                       |           | ⑯                      |           |
| Normally-closed                                   | ⑭                       |           | ⑰                      |           |
| Normally-open/<br>normally closed<br>programmable | ⑮                       |           |                        |           |
| <b>Wire colors</b>                                | BN                      | brown     |                        |           |
| Coding                                            | BK                      | black     |                        |           |
| per DIN IEC 60757                                 | BU                      | blue      |                        |           |
|                                                   | WH                      | white     |                        |           |


## Series connection

... can cause a time delay (e. g. start-up delay). The number of connected proximity switches is limited by the total voltage drop (sum of all  $U_d$ ). In the case of 2-wire sensors it is limited by the addition of the minimum supply voltages. For 3-wire switches, the load capacity of the output stage represents a further limitation, since the current consumption  $I_0$  of all switches is added to the rated current  $I_a$ . The ready delay time  $t_r$  is the ready delay of a sensor  $\times$  (number of sensors  $n-1$ ).

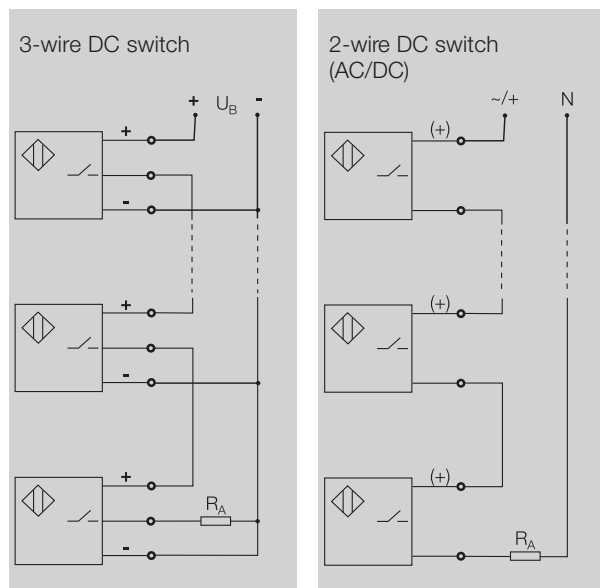

## For parallel connection

... of proximity switches with LED it is recommended that the outputs of the individual switches be decoupled using diodes (as shown). This prevents all LED's from lighting-up when the output stage of one switch is turned on.

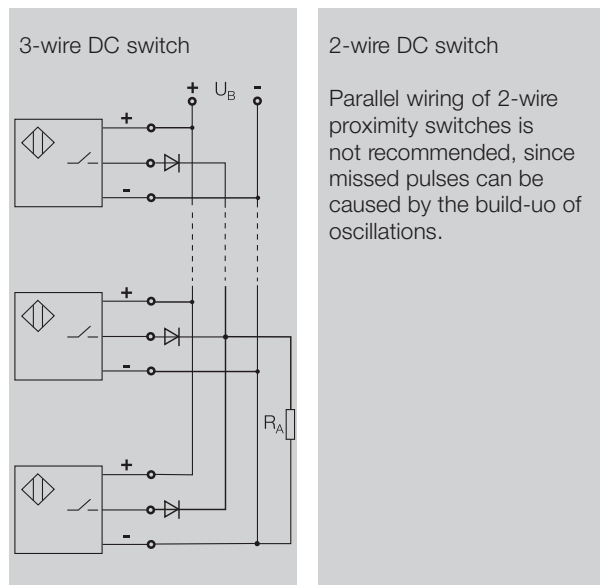

**Utilization categories**  
per EN 60947-5-2/  
IEC 60947-5-2

| Category |           |
|----------|-----------|
| AC 12    | AC-switch |
| AC 140   | AC-switch |
| DC 12    | DC-switch |
| DC 13    | DC-switch |

| Typical load applications                                          |  |
|--------------------------------------------------------------------|--|
| resistive and semiconductor loads, optocouplers                    |  |
| small electromagnetic load $I_a \leq 0.2$ A; e. g. contactor relay |  |
| resistive and semiconductor loads, optocouplers                    |  |
| electromagnets                                                     |  |

**Polarity reversal  
protected**

... protected against any possible lead reversal for sensors with short circuit protection.

... against reversal of plus/minus leads for sensors without short circuit protection.

**Cable break protection**

... in 3-wire sensors prevents improper function. A diode

prevents the current from flowing via the output line A.

**Short circuit protected**  
(sensors with a maximum voltage of 60 V DC)

... is achieved in Balluff sensors using pulsing or thermal short circuit protection circuits. The output stage is thereby protected against overload and short

circuit. The trigger current for the short circuit protection is higher than the rated operating current  $I_e$ . Currents from switching and load capacitances are specified in

the sensor data and do not result in triggering, but rather are masked by a short delay in the output circuit.

**Short circuit/overload  
protected**  
(universal AC/DC sensors)

... AC or AC/DC sensors are often operated with a relay or contactor as the load. AC switching devices (contactors/relays) create a significantly higher load (6...10 × rated current) when they are first energized as compared with their static operation due to the fact that the core is still open. The static value of the load (current) is not reached until several milliseconds later.

Not until the magnetic field is closed does the max. permissible rated operating current  $I_e$  flow through the sensor. This means that the threshold value for a short circuit condition in these sensors must lie significantly higher and would, if for example the contactor is prevented for mechanical or electrical reasons from fully closing, result in an overload on the sensors. This is where the overload protection comes into play. It is designed as slow-acting (time-delayed). Its trigger threshold lies only slightly above the maximum permissible  $I_e$ .

A response (i. e. turn-off) is delayed, depending on the magnitude of the overload, by more than 20 milliseconds. This ensures that properly working relays and contactors can be switched normally, while defective devices will not destroy the Balluff sensor. The short circuit/overload protection is generally of a bi-stable design, which means that it must be reset by turning off the supply voltage to the sensor.

### Axial and radial damping

When damping in an **axial direction** the standard target is moved concentric to the system axis.

The switchpoint is thereby determined only by the distance "s" from the sensing face of the sensor.

When damping in the **radial direction**, the location of the switchpoint is additionally affected by the radial distance "r" of the target from the system axis.

The diagram shows the **response curves**, which indicate the dependency of the switchpoint on "s" and "r".

The primary purpose of this drawing is to show the possibility of damping using a lateral approach and the difference compared with axial approach

### Application


Due in part to manufacturing tolerances within a production run, the exact switchpoint must in any case be established on site. The solid lines represent the respective switchpoint (E), the dashed lines indicate the turn-off point (A). The red lines apply to switches with a clear zone, and the black lines for flush mount types. Since the switching operation can be induced from either direction, the curves are shown mirrored from the system axis.

### Examples

**Passing objects** on conveyor lines generate a signal change when their front edge crosses the turn-on curve on the entry side. The signal reverses again when the back edge of the passing object crosses the (mirrored) turn-off curve on the opposite side.

With **reversing parts** (e. g. limit of travel), the signal reversal occurs at the turn-off curve on the same side.

### Typical approach curves using the example of an M12 sensor with $s_n$ 2 mm

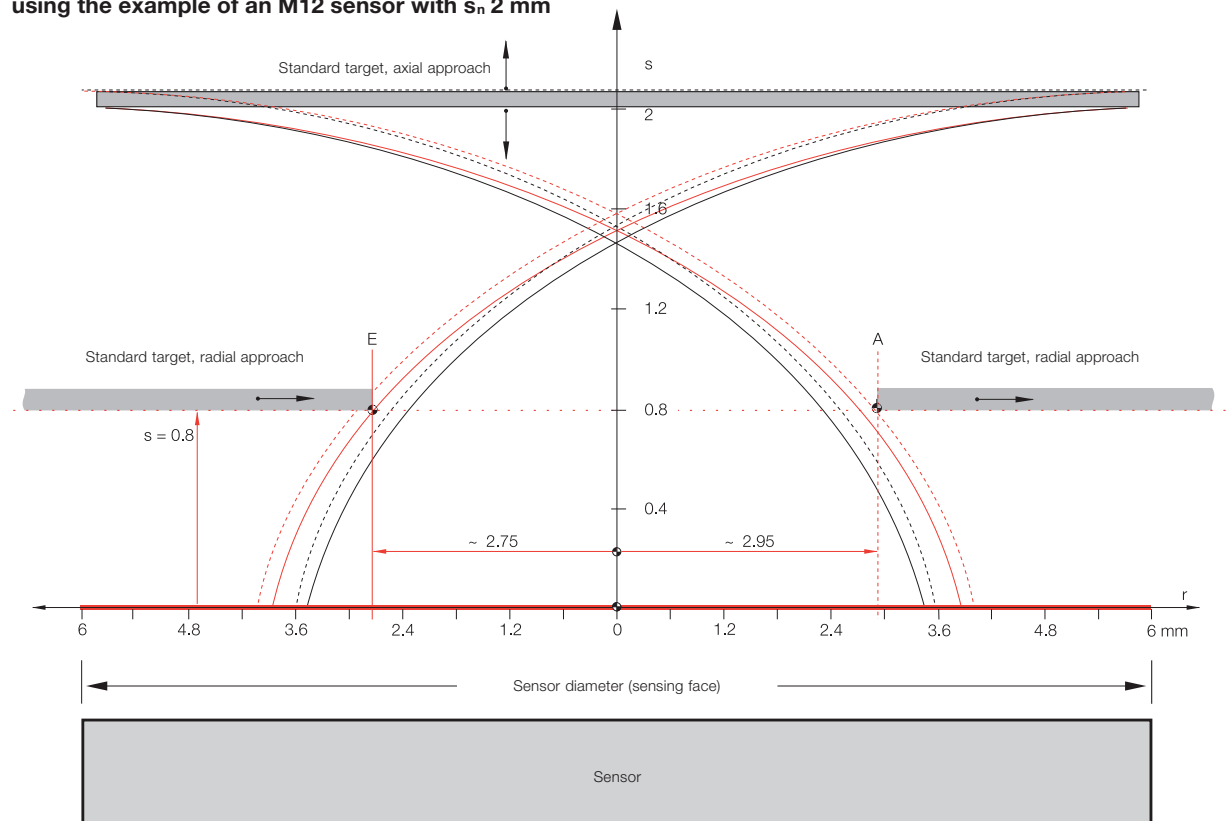

The **vertical axis** in the diagram shows the distance of the switchpoint from the sensing face. It is referenced to the nominal sensing distance  $s_n$  (see page 1.0.10).

At a distance of 0.8 mm, a laterally approaching target reaches the solid line turn-on curve at point "E" and leaves the turn-off curve at point "A".

The **horizontal axis** in the diagram is referenced to the radius of the sensing face (see page 1.0.2). The zero point of this axis lies in the center of the shell core cap. In our example for the M12 switch, the radius is  $r = 6$  mm.

Example:  
The distance of the turn-on and turn-off point (from the system axis) is typically  
E ~ 2.75 mm  
A ~ 2.95 mm.

## Switching distances

### Switching distance $s$

... is the distance between the standard target and the sensing face of the proximity switch at which a signal change is generated

per EN 60947-5-2. For "normally open" this means from OFF to ON and for normally closed from ON to OFF.

### Rated operating distance $s_n$

... is a theoretical value, which does not take into account manufacturing

tolerances, operating temperatures, supply voltages, etc.

### Effective operating distance $s_r$

... is the switching distance of a single proximity switch measured under specified conditions, e.g. flush mountable, rated operating

voltage  $U_e$ , temperature  $T_a = +23\text{ °C} \pm 5\text{ °C}$  ( $0.9 s_n \leq s_r \leq 1.1 s_n$ )

### Useful operating distance $s_u$


... is the switching distance of a single proximity switch under specified temperature and voltage conditions

( $0.81 s_n \leq s_u \leq 1.21 s_n$ ).

### Assured operating distance $s_a$

... is any switching distance for which an operation of the proximity switch within the permissible operating

conditions (temperatures, voltages) is guaranteed ( $0 \leq s_a \leq 0.81 s_n$ ).

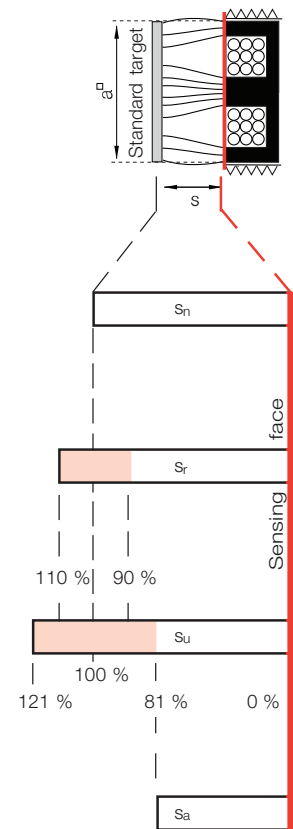

### Switching distance identifier (in sections 1.1, 1.2 and 1.5)

none

standard switching distance per IEC 60947-5-2

Switching distance ■ ■

"2x" the switching distance vs. standard

Switching distance ■ ■ ■

"3x" the switching distance vs. standard

Switching distance ■ ■ ■ ■

"4x" the switching distance vs. standard

| Housing        | Switching distance   |
|----------------|----------------------|
| Ø 3 mm*        | 1 mm flush           |
| Ø 4 mm/M5*     | 1.5 mm flush         |
| Ø 6.5 mm...M30 | 1.5...2x             |
| Ø 3 mm*        | 3 mm non-flush       |
| Ø 4 mm/M5*     | 5 mm non-flush       |
| Ø 6.5 mm...M12 | 2.2...3x             |
| M18...M30      | depending on version |

\*Switching distance in mm. The switching distances for these sensors are not standardized.

### Repeat accuracy R

... of  $s_r$  is determined at rated operating voltage  $U_e$  under the following conditions:

Temperature:  $T = +23\text{ °C} \pm 5\text{ °C}$   
Relative humidity:  $\leq 90\%$   
Measuring duration:  $t = 8\text{ h}$ .


The permissible deviation per EN 60947-5-2 is  $R \leq 0.1 s_r$ .

### Hysteresis H

(switching hysteresis when target is backed off)

... is given as a percentage of the effective operating distance  $s_r$ . It is measured at an ambient temperature of  $+23\text{ °C} \pm 5$  and at the rated operational voltage.


It must be less than 20 % of the effective operating distance ( $s_r$ ).  
 $H \leq 0.2 s_r$

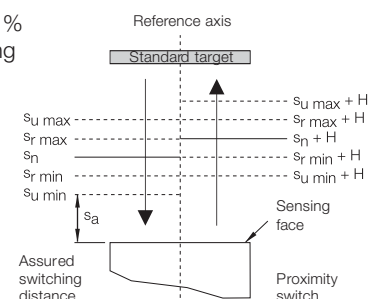

## Installation in metal Sensors with standard switching distance


### Flush mountable proximity switches

... can be installed with their sensing faces flush to the metal. The distance from opposing metal surfaces must be  $\geq 3s_n$  and the distance between two proximity switches (side-by-side)  $\geq 2d$ .




### Non-flush mountable proximity switches

... can be identified by their "caps", since they have no metal housing surrounding the area of the sensing face. The sensing face must extend  $\geq 2s_n$  from the metallic installation medium. The distance from opposing metal surfaces must be  $\geq 3s_n$  and the distance between two adjacent proximity switches  $\geq 3d$ .

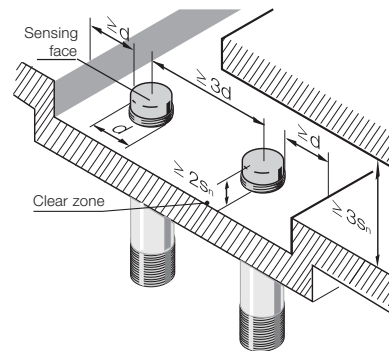

### Opposing installation of 2 sensors

... requires for all inductive proximity switches a minimum distance of  $\geq 3d$  between the sensing face.

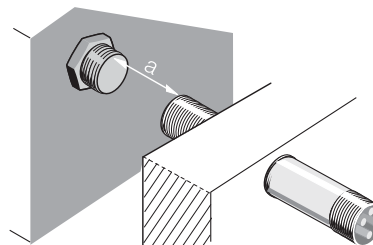

### Installation medium

Ferromagnetic materials:

Iron, steel or other magnetizable materials.

Alloys:

Brass, aluminum or other non-magnetizable materials.


Other materials:

Plastics, electrically non-conducting materials.


## Installation in metal Sensors with switching distance indicator ■■

### Flush mountable proximity switches

... can be installed with their sensing faces flush to the metal. Installation in alloy may result in a reduction of the switching distance. The distance to opposing switches must be  $\geq 3s_n$ , and the distance between adjacent switches (side-by-side) must be  $\geq 2d$ . In order to install the sensor in ferromagnetic materials, the following guidelines are used for dimension "x".



| Housing size d | Dimension „x“ |
|----------------|---------------|
| Ø 3 mm         | 1 mm          |
| Ø 4 mm         | 1.5 mm        |
| M5             | 1.5 mm        |
| Ø 6.5 mm       | 0 mm          |
| M8             | 0 mm          |
| M12            | 1.5 mm        |
| M18            | 2.5 mm        |
| M30            | 3.5 mm        |




For Factor 1 sensors (page 1.5.5 ...) and ATEX NAMUR (page 1.5.40 ...) the dimension „x“ is not needed for installation in metal.

For section 1.2:

| Housing size d | Dimension „x“ |
|----------------|---------------|
| M8             | 0 mm          |
| M12            | 0 mm          |
| M18            | 0.7 mm        |
| M30            | 3.5 mm        |


### Non-flush mountable proximity switches

... can be identified by their „caps“, since they have no metal housing surrounding the area of the sensing face. The sensing face must extend  $\geq 2s_n$  from the metallic installation medium. The distance from opposing metal surfaces must be  $\geq 3s_n$  and the distance between sensors  $\geq 3d$ .

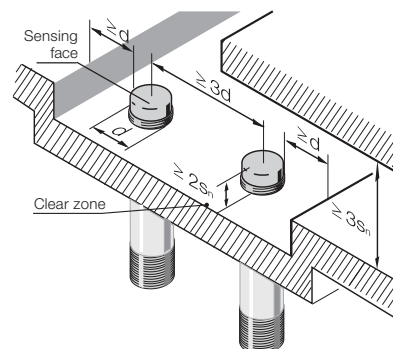

### Opposing installation of 2 sensors

... requires for all inductive proximity switches a minimum distance of  $\geq 4d$  between the sensing face.

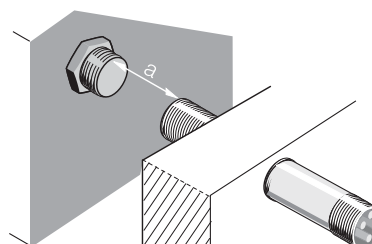





## Installation in metal Sensors with switching distance indicator ■■■ and ■■■■

### Quasi-flush mountable proximity switches

... require a space behind the sensing face which is free of conducting materials. Under this condition the specified switching distance is available without limitation. Dimension "x" (see fig.) indicates the shortest distance between the sensing face and the conductive material behind it.

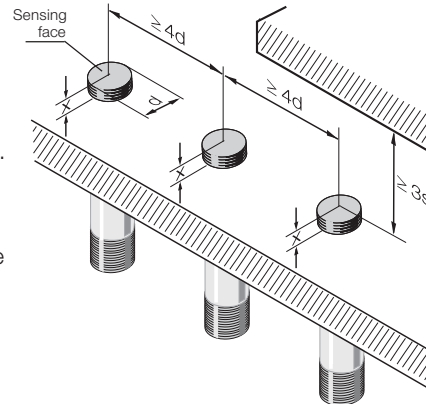


| Housing size d | Switching distance ■■■                                                              |              | Switching distance ■■■■           |              |
|----------------|-------------------------------------------------------------------------------------|--------------|-----------------------------------|--------------|
|                | Dimension „x“ for installation in                                                   |              | Dimension „x“ for installation in |              |
|                | ferromagnetic materials                                                             | other metals | ferromagnetic materials           | other metals |
| Ø 6.5 mm, M8   | 2.0 mm                                                                              | 1.0 mm       | 3.0 mm                            | 2.0 mm       |
| M12            | 2.5 mm                                                                              | 2.0 mm       | 4.0 mm                            | 3.0 mm       |
| M18            | 4.0 mm                                                                              | 2.5 mm       |                                   |              |
| M30            | 8.0 mm                                                                              | 4.0 mm       |                                   |              |
| 8x8 mm         |  |              |                                   |              |

### Non-flush mountable proximity switches

... can be identified by their „caps“, since they have no metal housing surrounding the area of the sensing face.

The distance from opposing metal surfaces must be  $\geq 3s_n$ .  
Installation conditions:


| Housing size d | Dimension b        | Dimension c   | Dimension e  |
|----------------|--------------------|---------------|--------------|
| Ø 3 mm         | $\geq 10$ mm       | $\geq 30$ mm  | $\geq 10$ mm |
| Ø 4 mm         | $\geq 15$ mm       | $\geq 40$ mm  | $\geq 20$ mm |
| M5             | $\geq 15$ mm       | $\geq 40$ mm  | $\geq 20$ mm |
| Ø 6.5 mm       | $\geq 8$ mm        | $\geq 32$ mm  | $\geq 8$ mm  |
| M8             | $\geq 8$ mm        | $\geq 32$ mm  | $\geq 8$ mm  |
| M12            | $\geq 10$ mm       | $\geq 48$ mm  | $\geq 12$ mm |
| M18            | $\geq 20$ mm       | $\geq 72$ mm  | $\geq 18$ mm |
| M30            | $\geq 35$ mm       | $\geq 120$ mm | $\geq 30$ mm |
|                | in steel           |               |              |
|                | $\geq 25$ mm       |               |              |
|                | in alloy           |               |              |
|                | $\geq 20$ mm       |               |              |
|                | in stainless steel |               |              |

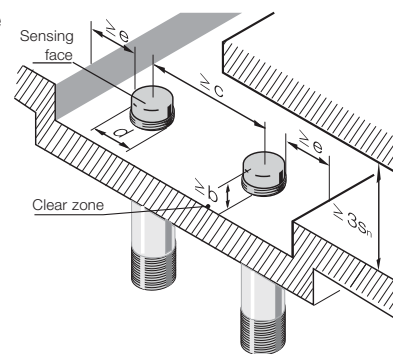

### Opposing installation of 2 sensors

... requires for all inductive proximity switches a minimum distance of  $\geq 5d$  between the sensing faces. For exceptions see table:

| Housing size | Dimension a |
|--------------|-------------|
| Ø 3 mm       | 20 mm       |
| Ø 4 mm       | 45 mm       |
| M5           | 45 mm       |

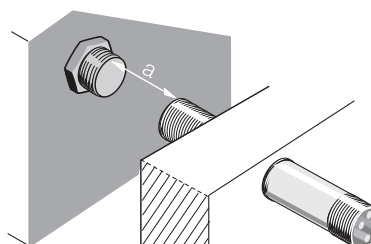

|                 | Materials                                                 | Use and characteristics                                                                                                                                                            |                                                                                                                                                   |
|-----------------|-----------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Metals</b>   | <b>Al</b><br>Aluminum wrought alloy                       | Standard aluminum for cut shaping. Can be anodized. Used for housings and fastening parts.                                                                                         |                                                                                                                                                   |
|                 | <b>CuZn</b><br>Brass                                      | Standard housing material with surface protection.                                                                                                                                 |                                                                                                                                                   |
|                 | <b>Stainless steel</b>                                    | Excellent corrosion resistance and strength.<br><u>Quality 1.4034, 1.4104:</u> Standard material.<br><u>Quality 1.4305, 1.4301:</u> Standard material for food grade applications. | <u>Quality 1.4401, 1.4404, 1.4571:</u> For food grade applications with heightened requirements for chemical resistance at elevated temperatures. |
|                 | <b>GD-Al</b><br>Cast aluminum                             | Low specific gravity. Good strength and resistance.                                                                                                                                | Some types can be anodized.                                                                                                                       |
|                 | <b>GD-Zn</b><br>Cast zinc                                 | Good resistance and strength. Usually with protective surface coating.                                                                                                             |                                                                                                                                                   |
| <b>Plastics</b> | <b>ABS</b><br>Acrylonitrile Butadiene Styrene             | Impact resistant, inflexible, limited chemical resistance. Some types flame-retardant.                                                                                             | Used for housings.                                                                                                                                |
|                 | <b>AES/CP</b><br>Acrylonitrile-Ethylene-propylene-Styrene | Impact resistant, inflexible, limited chemical resistance.                                                                                                                         | Used for housings.                                                                                                                                |
|                 | <b>EP</b><br>Epoxy resin                                  | Duomer, molding resin, highest mechanical strength and temperature resistance.                                                                                                     | Very good dimensional stability. Non-melting.                                                                                                     |
|                 | <b>LCP</b><br>Liquid Crystalline Polymer                  | High mechanical strength and temperature resistance. Very good chemical                                                                                                            | resistance. Inherently non-flammable.                                                                                                             |
|                 | <b>PA 6, PA 66, PA mod., PA 12</b><br>Polyamide           | Good mechanical strength. Temperature resistance.                                                                                                                                  | PA 12 approved for food industry applications.                                                                                                    |
|                 | <b>PA transp.</b><br>Transparent polyamide                | Transparent, hard, inflexible. Good chemical resistance.                                                                                                                           |                                                                                                                                                   |
|                 | <b>PBT</b><br>Polybuteneterephthalate                     | High mechanical strength and temperature resistance. Some types flame-retardant.                                                                                                   | Good chemical resistance. Good oil resistance.                                                                                                    |
|                 | <b>PC</b><br>Polycarbonate                                | Clear, hard, elastic and impact resistant. Good                                                                                                                                    | temperature resistance. Limited chemical resistance.                                                                                              |
|                 | <b>PEEK</b><br>Polyetheretherketone                       | Thermoplastic. Very high strength and temperature resistance. Good chemical resistance. Can be sterilized,                                                                         | good resistance to ionizing radiation.                                                                                                            |

|                 | Materials                             | Use and characteristics                                                                           |                                                                         |
|-----------------|---------------------------------------|---------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|
| <b>Plastics</b> | <b>PEI</b><br>Polyetherimide          | High mechanical strength and good temperature resistance. Good chemical resistance even with many | solvents. Transparent with amber-yellow inherent color (not pigmented). |
|                 | <b>PMMA</b><br>Polymethylmethacrylate | Clear, transparent, hard, scratch-resistance, UV                                                  | resistant, mainly for optical applications.                             |
|                 | <b>POM</b><br>Polyoxymethylene        | High impact resistance, good mechanical strength. Good chemical resistance.                       |                                                                         |
|                 | <b>PP</b><br>Polypropylene            | Very good electrical properties. Impact resistant, tough, mechanically resilient.                 | Very low water absorption. Good to very good chemical resistance.       |
|                 | <b>PPE</b><br>Polyphenylenether       | Tough, inflexible, high mechanical strength over a wide temperature range.                        | Good chemical resistance. Good hot water resistance.                    |
|                 | <b>PTFE</b><br>Polytetrafluorethylene | Best temperature and chemical resistance.                                                         |                                                                         |
|                 | <b>PUR</b><br>Polyurethane            | Elastic, abrasion-resistant, impact-resistant. Good resistance to oils, greases,                  | solvents (used for gaskets and cable jackets).                          |
|                 | <b>PVC</b><br>Polyvinylchloride       | Good mechanical strength and chemical resistance (cable).                                         |                                                                         |
| <b>Other</b>    | <b>PVDF</b><br>Polyvinylidenfluoride  | Thermoplastic. High temperature resistance and mechanical strength. Good                          | chemical resistance (similar to PTFE).                                  |
|                 | <b>Glass</b>                          | Good chemical resistance and strength. Used primarily in optical                                  | applications (lenses, covering panes).                                  |
|                 | <b>Ceramic</b>                        | Very good strength and chemical resistance. Electrically insulating.                              | Excellent temperature resistance.                                       |

## Cable types

| PUR cable, PUR jacketed            |                               | PVC cable, PVC jacketed            |                               |
|------------------------------------|-------------------------------|------------------------------------|-------------------------------|
| No. of wires × cross-section [mm²] | Outside diameter typical [mm] | No. of wires × cross-section [mm²] | Outside diameter typical [mm] |
| 2×0.08                             | 3...4                         | 2×0.14                             | 2.5...3.5                     |
| 2×0.14                             | 3...4.1                       | 2×0.34                             | 4.5...5.5                     |
| 2×0.34                             | 4...5.5                       |                                    |                               |
| 3×0.06                             | 2...2.5                       | 3×0.14                             | 2.7...4.5                     |
| 3×0.09                             | 2.5...3                       | 3×0.25                             | 4...5                         |
| 3×0.14                             | 2.5...3.5                     | 3×0.34                             | 4.5...5.5                     |
| 3×0.25                             | 3.5...4.5                     |                                    |                               |
| 3×0.34                             | 4...5.5                       | 4×0.25                             | 4.5...5.5                     |
| 3×0.75                             | 6.5...7                       |                                    |                               |
| 4×0.14                             | 3...4                         |                                    |                               |
| 4×0.25                             | 4...5.5                       |                                    |                               |
| 8×0.25                             | 6...8                         |                                    |                               |

## Least bending radius

| tensioned | untensioned | Cable trailing and roller deflection |
|-----------|-------------|--------------------------------------|
| 4×D       | 3×D         | 4×D...7.5×D<br>"SP" only             |

## Special cable

SP cable is a cross irradiated PUR cable that has good resistance to weld splatter.

A special connection cable is used for sensors that need to be used at higher ambient temperatures.


## Tightening torques

For permissible tightening torque, see data sheets or sensor packaging.

## Removal clearance

The removal clearance refers to the necessary clearance which must be allowed for when removing the connector without difficulty.

It results from the connector height "y" plus a space "s", which is determined mainly by the spatial conditions.

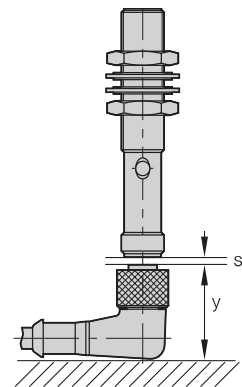

## Housing tolerances for unthreaded tubular sensors

| Diameter | tolerance |
|----------|-----------|
| Ø 3 mm   | -0.1      |
| Ø 4 mm   | -0.1      |
| Ø 6.5 mm | -0.15     |
| Ø 8 mm   | -0.15     |

**Quality Management  
System**

per DIN EN ISO 9001:2000

**Balluff company**

|                                    |                |
|------------------------------------|----------------|
| Balluff GmbH                       | Germany        |
| Balluff Elektronika KFT            | Hungary        |
| Nihon Balluff Com. Ltd.            | Japan          |
| Balluff U.K. Ltd.                  | Great Britain  |
| Balluff Automation s.r.l.          | Italy          |
| Balluff Inc.                       | USA            |
| Gebhard Balluff Vertriebsgmbh      | Austria        |
| Balluff CZ                         | Czech Republic |
| Hy-Tech AG                         | Switzerland    |
| Balluff Sensortechnik AG           | Switzerland    |
| Balluff Controles Eléctricos Ltda. | Brazil         |



**1.0**

**Environmental  
Management System**

per DIN EN ISO 14001:2005

**Balluff company**

|                         |         |
|-------------------------|---------|
| Balluff GmbH            | Germany |
| Balluff Elektronika KFT | Hungary |

**Testing laboratory**

The Balluff testing laboratory works in accordance with ISO/IEC 17025 and is

accredited by the DATech for Testing of Electromagnetic Compatibility (EMC).



**Balluff products  
meet the EU Directives**

Products requiring marking are subjected to a conformity evaluation process according to the EU Directive and the product is marked with the CE

Marking. Balluff products fall under the following EU Directives:



|             |                                                             |
|-------------|-------------------------------------------------------------|
| 2004/108/EG | EMC Directive                                               |
| 2006/95/EG  | Low-Voltage Directive<br>applies to AC and AC/DC sensors    |
| 94/9/EG     | ATEX Directive<br>applies to products having the Ex marking |



**Approvals**

... are granted by national and international institutions. Their symbols affirm that our products meet the specifications of these institutions.

„US Safety System“ and „Canadian Standards Association“ under the auspices of Underwriters Laboratories Inc. (cUL).



CCC Marking by the Chinese CQC.



**Balluff is a member of  
ALPHA**

ALPHA, an association for testing and certification of low-voltage devices, promotes the individual responsibility of the manufacturer of such devices by means of uniform test procedures according to current standards and thereby supports the attainment of high product

quality. ALPHA also grants nationally recognized product certificates when certain prerequisites are met. Through ALPHA's membership in LOVAG (Low Voltage Agreement Group), its certificates are also recognized in other European countries.



|                                                    |                       |                                                                                                                                                                                                                                              |                                                                                                                                                                                                              |
|----------------------------------------------------|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Sensors</b>                                     | Low-voltage equipment | EN 60947-5-2/IEC 60947-5-2                                                                                                                                                                                                                   |                                                                                                                                                                                                              |
|                                                    | NAMUR sensors         | EN 60947-5-6/IEC 60947-5-6                                                                                                                                                                                                                   |                                                                                                                                                                                                              |
| <b>Insulation class</b>                            | II □                  | EN 60947-5-2/IEC 60947-5-2                                                                                                                                                                                                                   |                                                                                                                                                                                                              |
| <b>Degree of protection<br/>(enclosure rating)</b> | IP 60...67            | EN 60529/IEC 60529                                                                                                                                                                                                                           |                                                                                                                                                                                                              |
|                                                    | IP 68 per BWN Pr. 20  | Balluff Factory Standard (BWN):<br>Temperature storage<br>48 h at 60 °C,<br>8 temperature cycles per<br>EN 60068-2-14/<br>IEC 60068-2-14 between<br>the reference temperatures<br>as per data sheet,<br>1 h under water,<br>insulation test, | 24 h under water,<br>insulation test,<br>8 temperature cycles per<br>EN 60068-2-14/<br>IEC 60068-2-14 between<br>the reference temperatures<br>as per data sheet,<br>7 days under water,<br>insulation test. |
|                                                    | IP 68 per BWN Pr. 27  | Balluff Factory Standard (BWN):                                                                                                                                                                                                              | Testing of products for use in<br>the food industry.                                                                                                                                                         |
|                                                    | IP 69K                | DIN 40050 Part 9                                                                                                                                                                                                                             | Protection against infiltration<br>of water under high pressure<br>and steam cleaning.                                                                                                                       |

**EMC  
(Electromagnetic  
Compatibility)**

|                                                                              |                              |
|------------------------------------------------------------------------------|------------------------------|
| Emissions, RF noise voltage and RF noise radiation from electrical equipment | EN 55011                     |
| Static discharge immunity (ESD)                                              | EN 61000-4-2/IEC 61000-4-2   |
| Radio frequency immunity (RFI)                                               | EN 61000-4-3/IEC 61000-4-3   |
| Immunity to fast transients (burst)                                          | EN 61000-4-4/IEC 61000-4-4   |
| Immunity to line-carried noise induced by high-frequency fields              | EN 61000-4-6/IEC 61000-4-6   |
| Immunity to voltage dips and voltage interruptions                           | EN 61000-4-11/IEC 61000-4-11 |
| Surge-voltage stability                                                      | EN 60947-5-2/IEC 60947-5-2   |

**Environmental simulation**

|                       |                              |
|-----------------------|------------------------------|
| Vibration, sinusoidal | EN 60068-2-6/IEC 60068-2-6   |
| Shock                 | EN 60068-2-27/IEC 60068-2-27 |
| Continuous shock      | EN 60068-2-29/IEC 60068-2-29 |

**Ex-zone**

|                                                                                        |            |
|----------------------------------------------------------------------------------------|------------|
| Electrical equipment for explosive atmospheres, general requirements.<br>Succeeded by: | EN 50014   |
| Electrical equipment for gas explosive atmospheres, general requirements.              | EN 60079-0 |
| Electrical equipment for explosive atmospheres, intrinsically-safe "i".                | EN 50020   |
| For conformity, see product marking.                                                   |            |


**1.0**

|                                |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |  |
|--------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--|
|                                |  |  |  |  |  |  |  |  |
| Housing                        | Ø 3 mm,<br>Ø 4 mm                                                                 | M5                                                                                | Ø 6.5 mm, M8,<br>Ø 8 mm                                                           | M12                                                                               | M16                                                                                | M18                                                                                 | M30                                                                                 |  |
| starting <b>Section</b> .Page  |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |  |
| DC 3-/4-wire                   | 1.1.2 ...                                                                         | 1.1.6 ...                                                                         | 1.1.9 ...                                                                         | 1.1.24 ...                                                                        |                                                                                    | 1.1.33 ...                                                                          | 1.1.40 ...                                                                          |  |
| DC 2-wire                      |                                                                                   |                                                                                   | 1.2.2 ...                                                                         | 1.2.4 ...                                                                         |                                                                                    | 1.2.6 ...                                                                           | 1.2.8 ...                                                                           |  |
| AC/DC 2-wire                   |                                                                                   |                                                                                   |                                                                                   | 1.3.2 ...                                                                         |                                                                                    | 1.3.3                                                                               | 1.3.3                                                                               |  |
| AC 2-wire                      |                                                                                   |                                                                                   |                                                                                   | 1.4.2 ...                                                                         |                                                                                    | 1.4.3                                                                               | 1.4.3                                                                               |  |
| Weld and magnetic field immune |                                                                                   |                                                                                   | 1.5.4 ...                                                                         | 1.5.5 ...                                                                         |                                                                                    | 1.5.6 ...                                                                           | 1.5.7 ...                                                                           |  |
| Magnetic field immune          |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |  |
| Diagnostics                    |                                                                                   |                                                                                   |                                                                                   | 1.5.15 ...                                                                        |                                                                                    | 1.5.15                                                                              |                                                                                     |  |
| Steelface                      |                                                                                   |                                                                                   |                                                                                   | 1.5.20 ...                                                                        |                                                                                    | 1.5.21                                                                              | 1.5.21                                                                              |  |
| Pressure/high pressure rated   |                                                                                   |                                                                                   | 1.5.22 ...                                                                        | 1.5.23 ...                                                                        | 1.5.26 ...                                                                         | 1.5.23 ...                                                                          |                                                                                     |  |
| Pressure rated Ex              |                                                                                   |                                                                                   |                                                                                   | 1.5.37                                                                            |                                                                                    | 1.5.37                                                                              |                                                                                     |  |
| Namur Ex                       |                                                                                   |                                                                                   | 1.5.40                                                                            | 1.5.41                                                                            |                                                                                    | 1.5.41                                                                              |                                                                                     |  |
| Temperature rated              |                                                                                   | 1.5.42                                                                            | 1.5.42                                                                            | 1.5.42                                                                            |                                                                                    | 1.5.43                                                                              | 1.5.43                                                                              |  |
| PROXINOX®                      |                                                                                   |                                                                                   |                                                                                   | 1.5.44 ...                                                                        |                                                                                    | 1.5.46 ...                                                                          | 1.5.47 ...                                                                          |  |



**1.0**

|  |  |  |  |  |  |  |  |  |
|--|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  | 5x5 mm                                                                            | 8x8 mm                                                                            | 8x16 mm                                                                           | 10x30 mm                                                                          | 16.5x30 mm                                                                        | 17.5x17.3 mm                                                                       | 20x32 mm                                                                            | 25x50 mm                                                                            |
|  | 1.1.47                                                                            | 1.1.50 ...                                                                        | 1.1.48 ...                                                                        | 1.1.49                                                                            | 1.1.53                                                                            | 1.1.58                                                                             | 1.1.55                                                                              | 1.1.58 ...                                                                          |
|  |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|  |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|  |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|  |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|  |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    | 1.5.11                                                                              |                                                                                     |
|  |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    | 1.5.12 ...                                                                          |                                                                                     |
|  |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|  |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|  |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|  |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|  |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|  |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|  |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|  |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|  |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     | 1.5.43                                                                              |
|  |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |

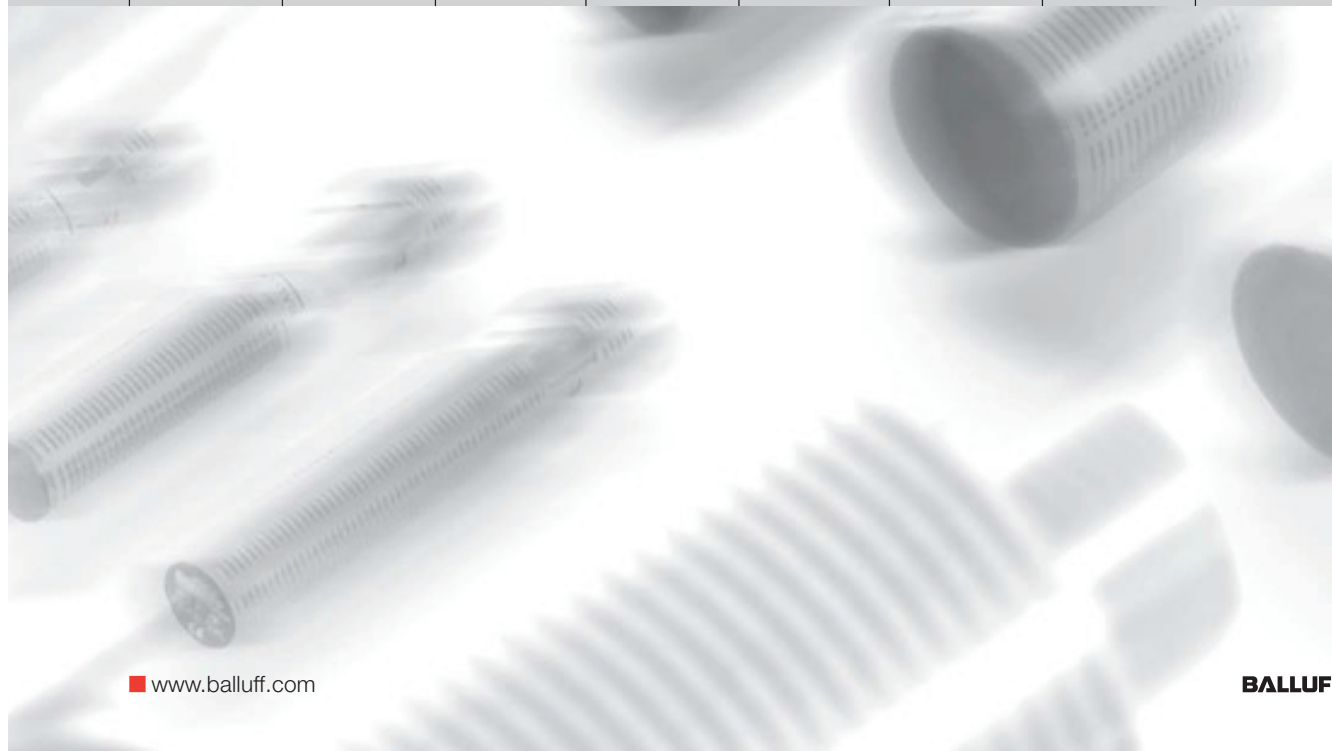

|                                |  |  |  |  |  |  |  |  |
|--------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--|
| Housing                        | 26x26 mm                                                                          | 26x40 mm                                                                          | 42x48 mm                                                                          | 74x60.5 mm                                                                        | 40x40 mm<br>Unicomact                                                               | 40x40 mm<br>Unisensor                                                               | 80x80, 84, 92 mm<br>Maxisensor                                                      |  |
| starting <b>Section</b> .Page  |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                     |                                                                                     |                                                                                     |  |
| DC 3-/4-wire                   |                                                                                   | 1.1.56 ...                                                                        | 1.1.60                                                                            | 1.1.61                                                                            | 1.1.62 ...                                                                          | 1.1.65 ...                                                                          | 1.1.68                                                                              |  |
| DC 2-wire                      | 1.2.12                                                                            |                                                                                   |                                                                                   |                                                                                   | 1.2.10 ...                                                                          |                                                                                     | 1.2.11                                                                              |  |
| AC/DC 2-wire                   |                                                                                   | 1.3.4                                                                             |                                                                                   |                                                                                   | 1.3.5                                                                               | 1.3.6                                                                               | 1.3.7                                                                               |  |
| Factor 1                       |                                                                                   |                                                                                   |                                                                                   |                                                                                   | 1.5.2 ...                                                                           |                                                                                     |                                                                                     |  |
| Diagnostics                    |                                                                                   |                                                                                   |                                                                                   |                                                                                   | 1.5.15                                                                              |                                                                                     |                                                                                     |  |
| Weld and magnetic field immune |                                                                                   |                                                                                   |                                                                                   |                                                                                   | 1.5.9                                                                               |                                                                                     |                                                                                     |  |
| Magnetic field immune          |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                     | 1.5.13                                                                              |                                                                                     |  |
| Namur Ex                       |                                                                                   |                                                                                   |                                                                                   |                                                                                   | 1.5.41                                                                              |                                                                                     |                                                                                     |  |
| Extended switching distance    |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                     |                                                                                     |                                                                                     |  |
| Ring Sensors                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                     |                                                                                     |                                                                                     |  |



1.0



35×35 mm



Ø 80×67 mm



Ø 110×110 mm




Ring sensor

1.5.53

1.5.52

1.5.54

1.5.51

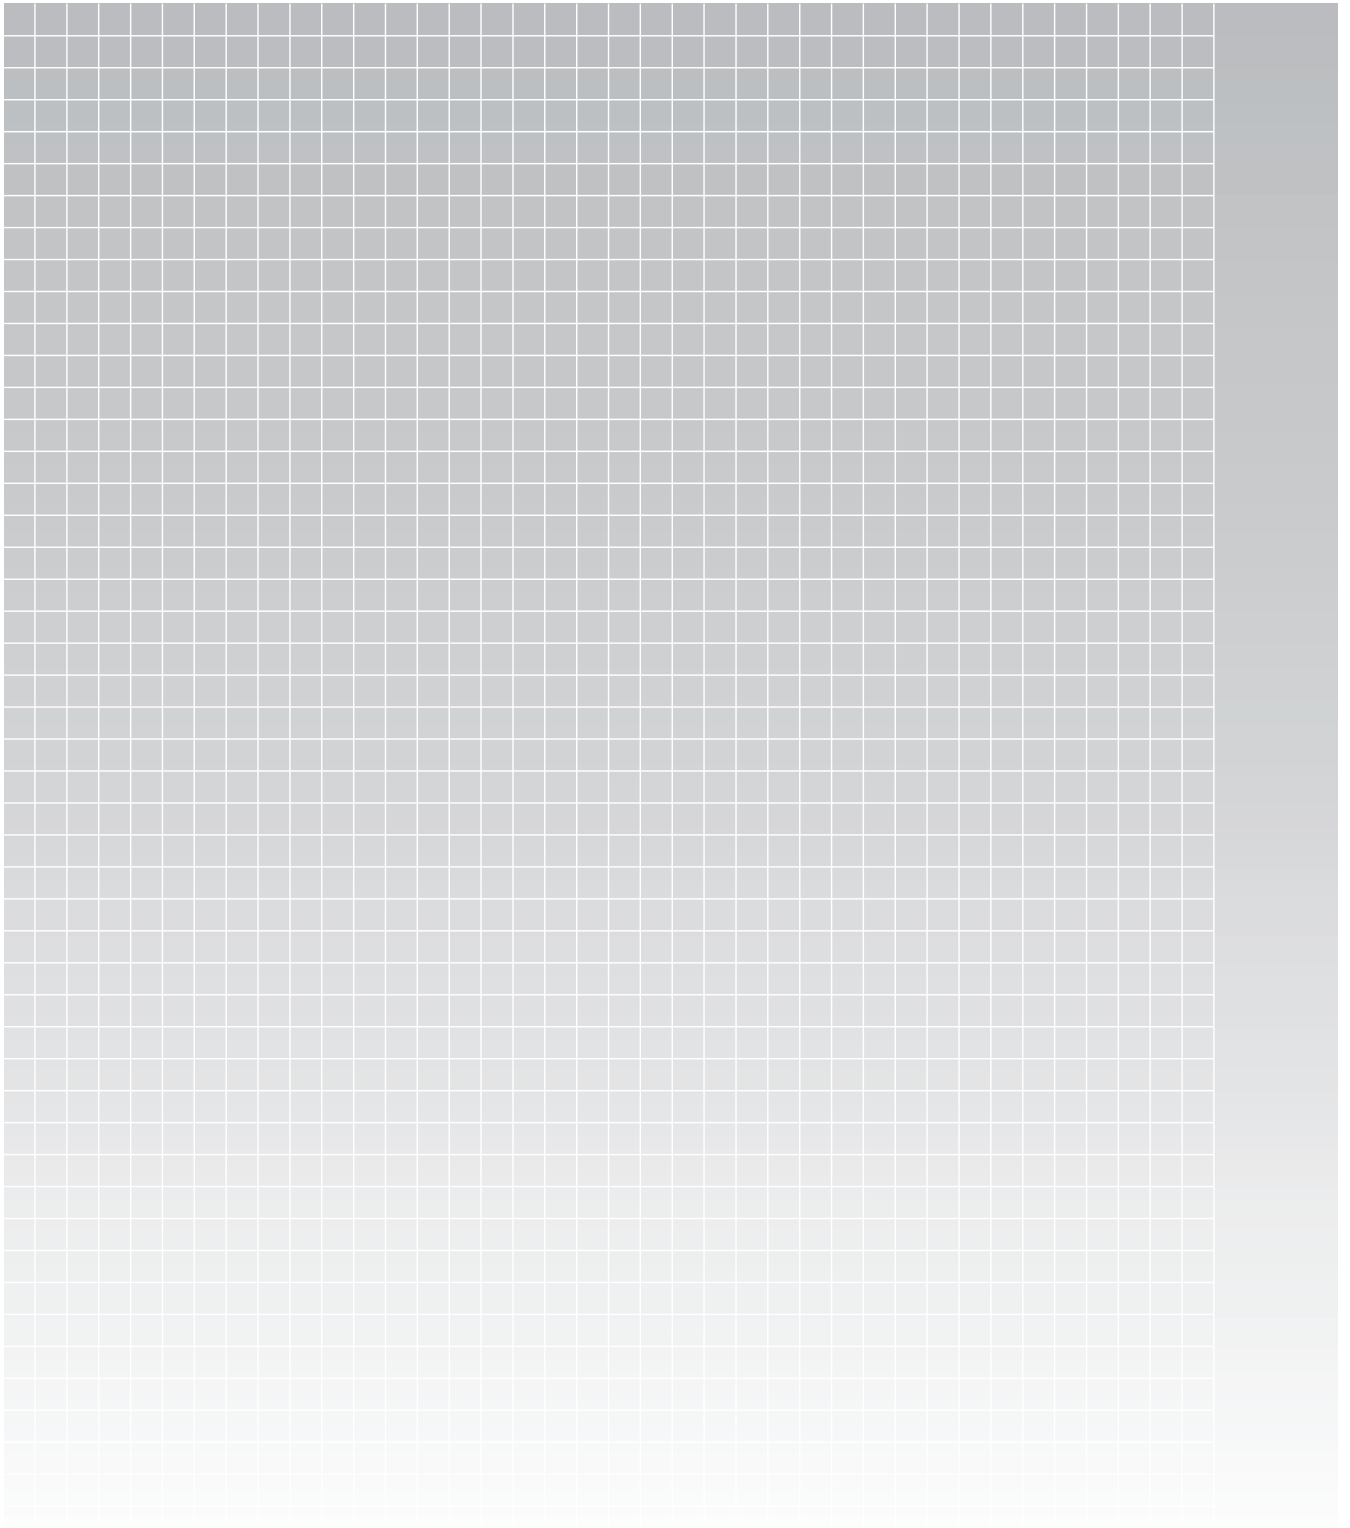




**Our standard line  
in 3- and 4-wire  
DC versions**

In this comprehensive line Balluff offers proximity switches from  $\varnothing$  3 mm to 80x80 mm for virtually any application in the field of automation.

These highest quality sensors are designed and manufactured according to worldwide standards and the latest technology. Our 100 % final inspection of all products is your assurance that only carefully tested sensors leave our plants.

- 1.1.2  $\varnothing$  3 mm
- 1.1.3  $\varnothing$  3 mm,  $\varnothing$  4 mm
- 1.1.6 M5
- 1.1.9  $\varnothing$  6.5 mm
- 1.1.13  $\varnothing$  8 mm
- 1.1.14 M8
- 1.1.24 M12
- 1.1.33 M18
- 1.1.40 M30
- 1.1.47 Block style housings

# Inductive – DC 3-/4-wire


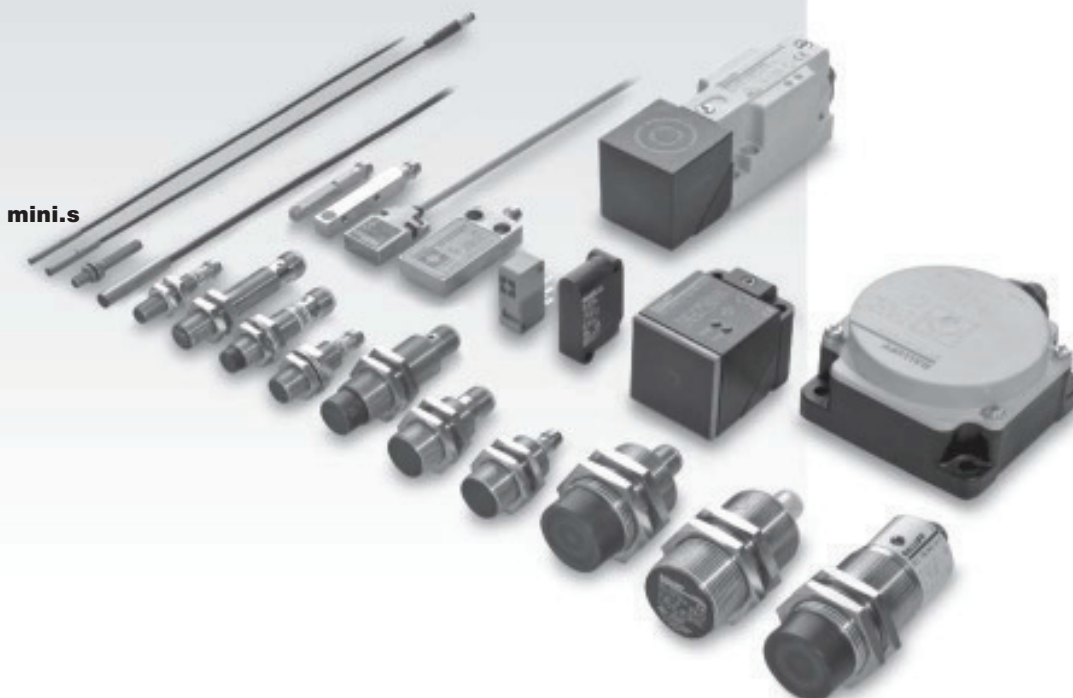
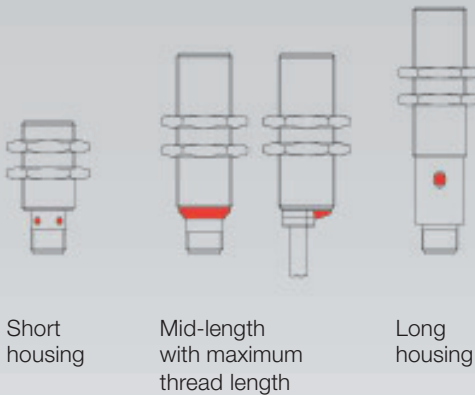
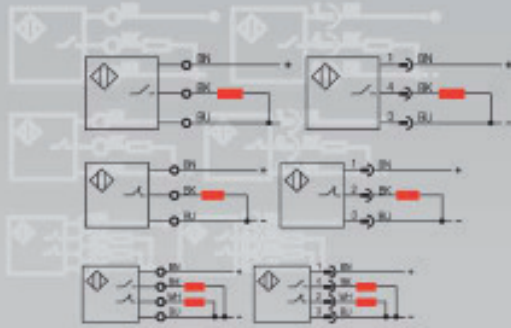


## Inductive Sensors

DC 3-wire  
 $\varnothing$  3 mm  
 $s_n$  1 mm, 3 mm

$\varnothing$  3 mm


|                                         |                    |                    |                    |                    |
|-----------------------------------------|--------------------|--------------------|--------------------|--------------------|
| Housing size                            | $\varnothing$ 3 mm | $\varnothing$ 3 mm | $\varnothing$ 3 mm | $\varnothing$ 3 mm |
| Mounting (see notes starting p. 1.0.11) | flush              | flush              | flush              | non-flush          |
| Rated operating distance $s_n$          | 1 mm               | 1 mm               | 1 mm               | 3 mm               |
| Assured operating distance $s_a$        | 0...0.8 mm         | 0...0.8 mm         | 0...0.8 mm         | 0...2.3 mm         |

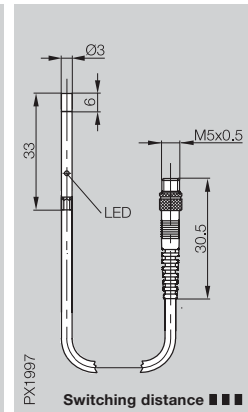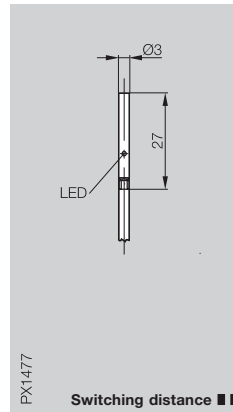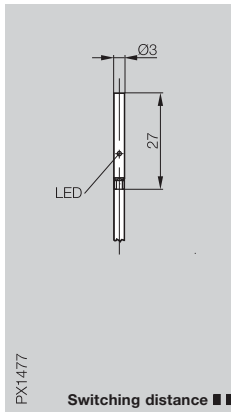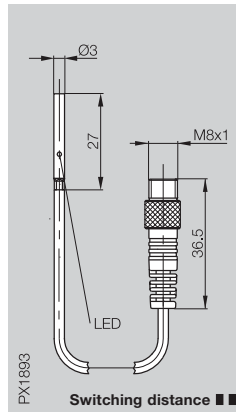

|                                     |                                |   |                                 |                           |                                 |                              |                                |
|-------------------------------------|--------------------------------|---|---------------------------------|---------------------------|---------------------------------|------------------------------|--------------------------------|
| PNP                                 | NO                             | ① | BES 516-3044-G-E4-C-S49-00,3    | BES 516-3044-G-E4-C-PU-02 |                                 | BES 516-3048-G-E4-C-S26-00,3 |                                |
|                                     | NC                             | ② |                                 | BES 516-3045-G-E4-C-PU-02 |                                 |                              |                                |
| NPN                                 | NO                             | ④ |                                 |                           | BES 516-3046-G-E4-L-PU-02       |                              |                                |
|                                     | NC                             |   |                                 |                           |                                 |                              |                                |
| Supply voltage $U_B$                | 10...30 V DC                   |   | 10...30 V DC                    |                           | 10...30 V DC                    |                              | 21.6...26.4 V DC               |
| Voltage drop $U_d$ at $I_B$         | $\leq 2.5$ V                   |   | $\leq 2.5$ V                    |                           | $\leq 1.5$ V                    |                              | $\leq 2.5$ V                   |
| Rated insulation voltage $U_i$      | 75 V DC                        |   | 75 V DC                         |                           | 75 V DC                         |                              | 75 V DC                        |
| Rated operational current $I_B$     | 100 mA                         |   | 100 mA                          |                           | 100 mA                          |                              | 50 mA                          |
| No-load supply current $I_0$ max.   | $\leq 12$ mA                   |   | $\leq 12$ mA                    |                           | $\leq 12$ mA                    |                              | $\leq 10$ mA                   |
| Polarity reversal protected         | yes                            |   | yes                             |                           | yes                             |                              | yes                            |
| Short circuit protected             | yes                            |   | yes                             |                           | no                              |                              | yes                            |
| Repeat accuracy R                   | $\leq 5$ %                     |   | $\leq 5$ %                      |                           | $\leq 5$ %                      |                              | $\leq 15$ %                    |
| Ambient temperature range $T_a$     | $-25...+70$ °C                 |   | $-25...+70$ °C                  |                           | $0...+70$ °C                    |                              | $0...+70$ °C                   |
| Switching frequency f               | 2000 Hz                        |   | 2000 Hz                         |                           | 5000 Hz                         |                              | 3000 Hz                        |
| Utilization category                | DC 13                          |   | DC 13                           |                           | DC 13                           |                              | DC 13                          |
| Function indicator                  | yes                            |   | yes                             |                           | yes                             |                              | yes                            |
| Degree of protection per IEC 60529  | IP 67                          |   | IP 67                           |                           | IP 67                           |                              | IP 67                          |
| Housing material                    | Stainless steel                |   | Stainless steel                 |                           | Stainless steel                 |                              | Stainless steel                |
| Material of sensing face            | POM                            |   | POM                             |                           | POM                             |                              | POM                            |
| Connection                          | 0.3 m PUR cable with connector |   | 2 m cable PUR                   |                           | 2 m cable PUR                   |                              | 0.3 m PUR cable with connector |
| No. of wires $\times$ cross-section |                                |   | 3 $\times$ 0.09 mm <sup>2</sup> |                           | 3 $\times$ 0.09 mm <sup>2</sup> |                              |                                |
| Approval                            | cULus                          |   | cULus                           |                           |                                 |                              |                                |
| Recommended connector               | BKS- 48                        |   |                                 |                           |                                 |                              | BKS-B 25                       |

① Wiring diagrams see page 1.0.6  
 Switching distance ■■ see page 1.0.10

Other cable lengths on request.

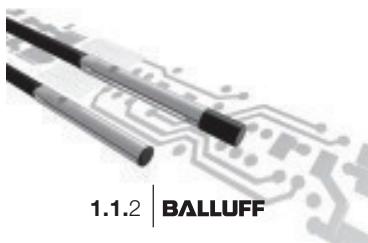


**mini.s**  
 The new sensor dimension

Ø 3 mm, Ø 4 mm

## Inductive Sensors

DC 3-wire  
Ø 3 mm, Ø 4 mm  
s<sub>n</sub> 0.8 mm, 3 mm

| Ø 3 mm<br>non-flush<br>3 mm<br>0...2.3 mm | Ø 4 mm<br>flush<br>0.8 mm<br>0...0.6 mm | Ø 4 mm<br>flush<br>0.8 mm<br>0...0.6 mm | Ø 4 mm<br>flush<br>0.8 mm<br>0...0.6 mm | Ø 4 mm<br>flush<br>0.8 mm<br>0...0.6 mm |
|-------------------------------------------|-----------------------------------------|-----------------------------------------|-----------------------------------------|-----------------------------------------|
|-------------------------------------------|-----------------------------------------|-----------------------------------------|-----------------------------------------|-----------------------------------------|

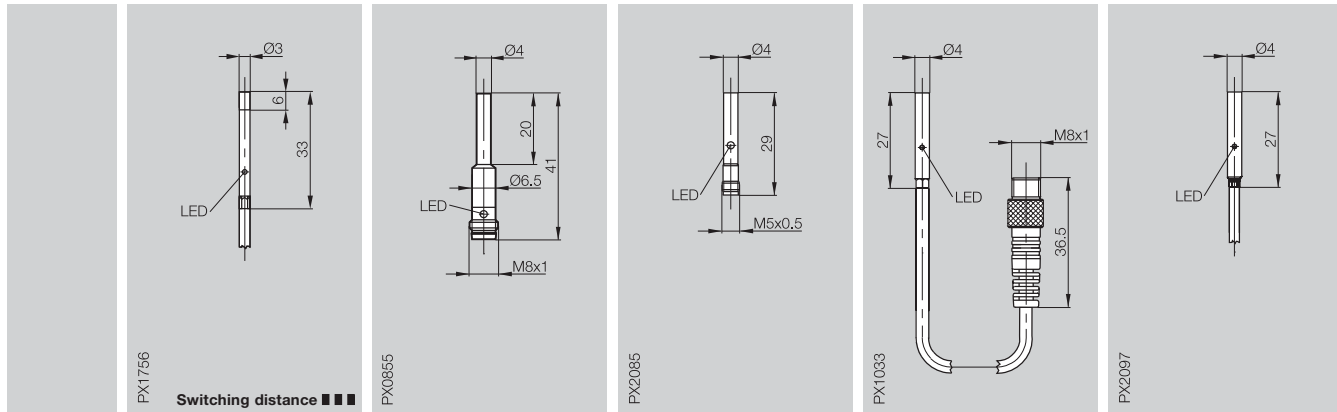

1.1

|                           |                                                |                                                |                                                          |                         |
|---------------------------|------------------------------------------------|------------------------------------------------|----------------------------------------------------------|-------------------------|
| BES 516-3048-G-E4-C-PU-02 | BES 516-3007-E5-C-S49<br>BES 516-3017-E5-C-S49 | BES G04EC-PSC08B-S26G<br>BES G04EC-POC08B-S26G | BES 516-3007-E4-C-S49-00,3<br>BES 516-3017-E4-C-S49-00,3 | BES 516-3007-E4-C-PU-02 |
|                           | BES 516-3008-E5-C-S49                          | BES G04EC-NSC08B-S26G                          | BES 516-3008-E4-C-S49-00,2                               |                         |
| 21.6...26.4 V DC          | 10...30 V DC                                   | 10...30 V DC                                   | 10...30 V DC                                             | 10...30 V DC            |
| ≤ 2.5 V                   | ≤ 3 V                                          | ≤ 3 V                                          | ≤ 3 V                                                    | ≤ 3 V                   |
| 75 V DC                   | 75 V DC                                        | 75 V DC                                        | 75 V DC                                                  | 75 V DC                 |
| 50 mA                     | 100 mA                                         | 100 mA                                         | 100 mA                                                   | 100 mA                  |
| ≤ 10 mA                   | ≤ 12 mA                                        | ≤ 12 mA                                        | ≤ 12 mA                                                  | ≤ 12 mA                 |
| yes                       | yes                                            | yes                                            | yes                                                      | yes                     |
| yes                       | yes                                            | yes                                            | yes                                                      | yes                     |
| ≤ 15 %                    | ≤ 5 %                                          | ≤ 5 %                                          | ≤ 5 %                                                    | ≤ 5 %                   |
| 0...+70 °C                | -25...+70 °C                                   | -25...+70 °C                                   | -25...+70 °C                                             | -25...+70 °C            |
| 3000 Hz                   | 3000 Hz                                        | 3000 Hz                                        | 3000 Hz                                                  | 3000 Hz                 |
| DC 13                     | DC 13                                          | DC 13                                          | DC 13                                                    | DC 13                   |
| yes                       | yes                                            | yes                                            | yes                                                      | yes                     |
| IP 67                     | IP 67                                          | IP 67                                          | IP 67                                                    | IP 67                   |
| Stainless steel           | Stainless steel                                | Stainless steel                                | Stainless steel                                          | Stainless steel         |
| POM                       | POM                                            | POM                                            | POM                                                      | POM                     |
| 2 m cable PUR             | Connector                                      | Connector                                      | 0.2 m/0.3 m PUR cable with connector                     | 2 m cable PUR           |
| 3x0.09 mm²                |                                                |                                                |                                                          | 3x0.14 mm²              |
|                           | cULus                                          | cULus                                          | cULus                                                    | cULus                   |
|                           | BKS- 48/BKS- 49                                | BKS-B 25/BKS-B 26                              | BKS- 48                                                  |                         |



5

Connectors,  
Holders ...  
Page 5.2 ...







## Inductive Sensors

DC 3-wire  
 $\varnothing$  4 mm  
 $s_n$  1.5 mm

$\varnothing$  4 mm

|                                         |                    |                    |                    |                    |  |
|-----------------------------------------|--------------------|--------------------|--------------------|--------------------|--|
| Housing size                            | $\varnothing$ 4 mm | $\varnothing$ 4 mm | $\varnothing$ 4 mm | $\varnothing$ 4 mm |  |
| Mounting (see notes starting p. 1.0.11) | flush              | flush              | flush              | flush              |  |
| Rated operating distance $s_n$          | 1.5 mm             | 1.5 mm             | 1.5 mm             | 1.5 mm             |  |
| Assured operating distance $s_a$        | 0...1.2 mm         | 0...1.2 mm         | 0...1.2 mm         | 0...1.2 mm         |  |

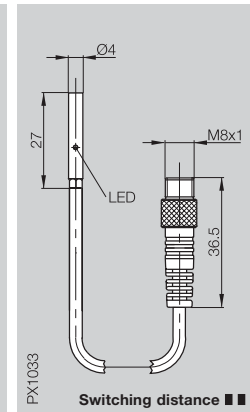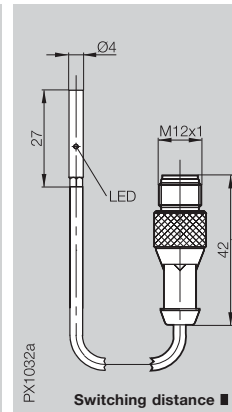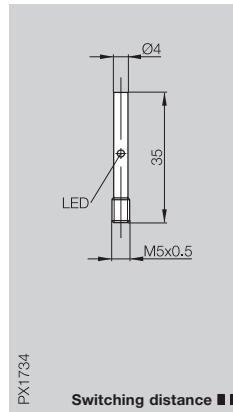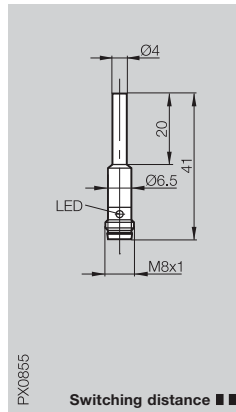

|                                     |                   |   |                         |                                |                                |                                      |
|-------------------------------------|-------------------|---|-------------------------|--------------------------------|--------------------------------|--------------------------------------|
| PNP                                 | NO                | ① | BES 516-3007-G-E5-C-S49 | BES G04ED-PSC15B-S26G          | BES 516-3007-G-E4-C-S4-00,2    | BES 516-3007-G-E4-C-S49-00,3         |
|                                     | NC                | ② | BES 516-3017-G-E5-C-S49 |                                | BES 516-3017-G-E4-C-S4-00,2    | BES 516-3017-G-E4-C-S49-00,3         |
| NPN                                 | NO                | ④ | BES 516-3008-G-E5-C-S49 |                                |                                | BES 516-3008-G-E4-C-S49-00,2         |
|                                     | NC                | ⑤ | BES 516-3018-G-E5-C-S49 |                                |                                |                                      |
| Supply voltage $U_B$                | 10...30 V DC      |   | 10...30 V DC            | 10...30 V DC                   | 10...30 V DC                   | 10...30 V DC                         |
| Voltage drop $U_d$ at $I_e$         | $\leq 3$ V        |   | $\leq 3$ V              | $\leq 3$ V                     | $\leq 3$ V                     | $\leq 3$ V                           |
| Rated insulation voltage $U_i$      | 75 V DC           |   | 75 V DC                 | 75 V DC                        | 75 V DC                        | 75 V DC                              |
| Rated operational current $I_e$     | 100 mA            |   | 100 mA                  | 100 mA                         | 100 mA                         | 100 mA                               |
| No-load supply current $I_0$ max.   | $\leq 12$ mA      |   | $\leq 10$ mA            | $\leq 12$ mA                   | $\leq 12$ mA                   | $\leq 12$ mA                         |
| Polarity reversal protected         | yes               |   | yes                     | yes                            | yes                            | yes                                  |
| Short circuit protected             | yes               |   | yes                     | yes                            | yes                            | yes                                  |
| Repeat accuracy R                   | $\leq 5$ %        |   | $\leq 5$ %              | $\leq 5$ %                     | $\leq 5$ %                     | $\leq 5$ %                           |
| Ambient temperature range $T_a$     | -25...+70 °C      |   | -25...+70 °C            | -25...+70 °C                   | -25...+70 °C                   | -25...+70 °C                         |
| Switching frequency f               | 3000 Hz           |   | 3000 Hz                 | 3000 Hz                        | 3000 Hz                        | 3000 Hz                              |
| Utilization category                | DC 13             |   | DC 13                   | DC 13                          | DC 13                          | DC 13                                |
| Function indicator                  | yes               |   | yes                     | yes                            | yes                            | yes                                  |
| Degree of protection per IEC 60529  | IP 67             |   | IP 67                   | IP 67                          | IP 67                          | IP 67                                |
| Housing material                    | Stainless steel   |   | Stainless steel         | Stainless steel                | Stainless steel                | Stainless steel                      |
| Material of sensing face            | POM               |   | POM                     | POM                            | POM                            | POM                                  |
| Connection                          | Connector         |   | Connector               | 0.2 m PUR cable with connector | 0.2 m PUR cable with connector | 0.2 m/0.3 m PUR cable with connector |
| No. of wires $\times$ cross-section |                   |   |                         |                                |                                |                                      |
| Approval                            | cULus             |   | cULus                   | cULus                          | cULus                          | cULus                                |
| Recommended connector               | BKS-_ 48/BKS-_ 49 |   | BKS-B 25/BKS-B 26       | BKS-_ 19                       | BKS-_ 48                       |                                      |

① Wiring diagrams see page 1.0.6  
 Switching distance ■■ see page 1.0.10

Other cable lengths on request.









Ø 4 mm

# Inductive Sensors

DC 3-wire  
Ø 4 mm  
s<sub>n</sub> 1.5 mm, 5 mm

1.1

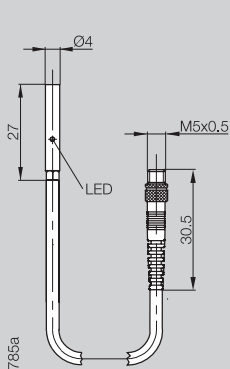
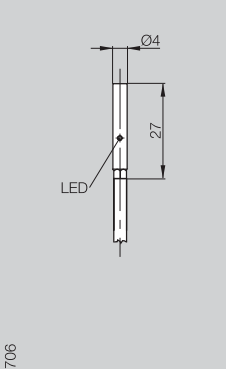
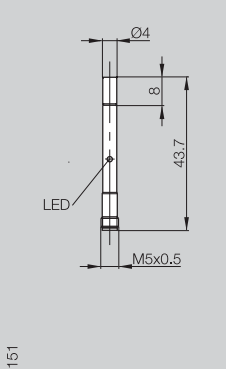
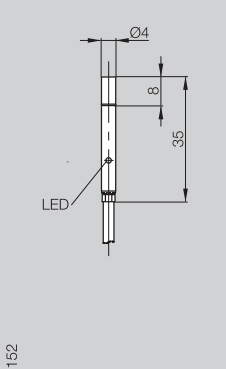
|  | Ø 4 mm<br>flush<br>1.5 mm<br>0...1.2 mm                                           | Ø 4 mm<br>flush<br>1.5 mm<br>0...1.2 mm                                           | Ø 4 mm<br>non-flush<br>5 mm<br>0...4.1 mm                                         | Ø 4 mm<br>non-flush<br>5 mm<br>0...4.1 mm                                          |  |
|--|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|--|
|  |  |  |  |  |  |
|  | PX1785a<br>Switching distance ■ ■                                                 | PX0706<br>Switching distance ■ ■                                                  | PX2151<br>Switching distance ■ ■ ■                                                | PX2152<br>Switching distance ■ ■ ■                                                 |  |
|  | BES 516-3007-G-E4-C-S26-00,2                                                      | BES 516-3007-G-E4-C-PU-02<br>BES 516-3017-G-E4-C-PU-02                            | BES G04ED-PSC50F-S26G                                                             | BES G04ED-PSC50F-EP02                                                              |  |
|  |                                                                                   | BES 516-3008-G-E4-C-PU-02<br>BES 516-3018-G-E4-C-PU-02                            |                                                                                   |                                                                                    |  |
|  | 10...30 V DC<br>≤ 3 V<br>75 V DC<br>100 mA<br>≤ 12 mA<br>yes<br>yes               | 10...30 V DC<br>≤ 3 V<br>75 V DC<br>100 mA<br>≤ 12 mA<br>yes<br>yes               | 10...30 V DC<br>≤ 2.5 V<br>75 V DC<br>100 mA<br>≤ 10 mA<br>yes<br>yes             | 10...30 V DC<br>≤ 2.5 V<br>75 V DC<br>100 mA<br>≤ 10 mA<br>yes<br>yes              |  |
|  | ≤ 5 %<br>-25...+70 °C<br>3000 Hz<br>DC 13<br>yes                                  | ≤ 5 %<br>-25...+70 °C<br>3000 Hz<br>DC 13<br>yes                                  | ≤ 10 %<br>-25...+70 °C<br>3000 Hz<br>DC 13<br>yes                                 | ≤ 10 %<br>-25...+70 °C<br>3000 Hz<br>DC 13<br>yes                                  |  |
|  | IP 67                                                                             | IP 67                                                                             | IP 67                                                                             | IP 67                                                                              |  |
|  | Stainless steel<br>POM<br>0.2 m PUR cable with<br>connector                       | Stainless steel<br>POM<br>2 m cable PUR                                           | Stainless steel<br>POM<br>Connector                                               | Stainless steel<br>POM<br>2 m cable PUR                                            |  |
|  | cULus<br>BKS-B 25                                                                 | 3×0.14 mm <sup>2</sup><br>cULus                                                   | cULus<br>BKS-B 25/BKS-B 26                                                        | 3×0.14 mm <sup>2</sup><br>cULus                                                    |  |



5

Connectors,  
Holders ...  
Page 5.2 ...

|                                           |               |               |               |               |  |
|-------------------------------------------|---------------|---------------|---------------|---------------|--|
| Housing size                              | <b>M5x0.5</b> | <b>M5x0.5</b> | <b>M5x0.5</b> | <b>M5x0.5</b> |  |
| Mounting (see notes starting p. 1.0.11)   | flush         | flush         | flush         | flush         |  |
| Rated operating distance s <sub>n</sub>   | <b>0.8 mm</b> | <b>0.8 mm</b> | <b>0.8 mm</b> | <b>0.8 mm</b> |  |
| Assured operating distance s <sub>a</sub> | 0...0.6 mm    | 0...0.6 mm    | 0...0.6 mm    | 0...0.6 mm    |  |

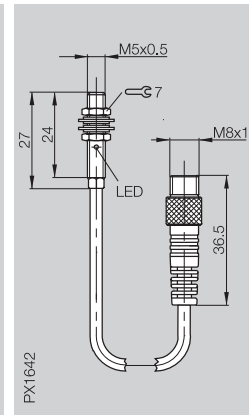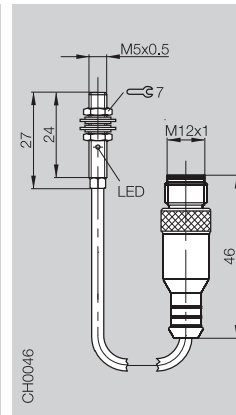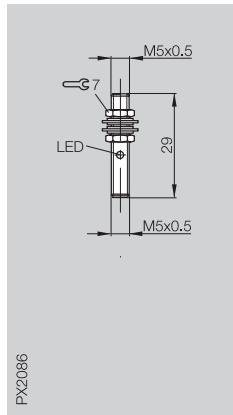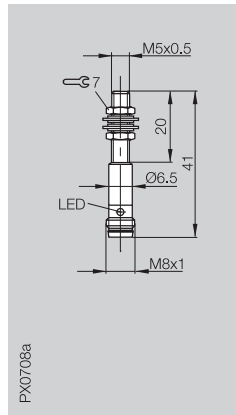






|                                               |                   |   |                       |                                |                                |                            |
|-----------------------------------------------|-------------------|---|-----------------------|--------------------------------|--------------------------------|----------------------------|
| PNP                                           | NO                | ① | BES 516-3005-E5-C-S49 | BES M05EC-PSC08B-S26G          | BES 516-3005-E4-C-S4-00,3      | BES 516-3005-E4-C-S49-00,3 |
|                                               | NC                | ② | BES 516-3022-E5-C-S49 | BES M05EC-POC08B-S26G          |                                |                            |
| NPN                                           | NO                | ④ | BES 516-3006-E5-C-S49 | BES M05EC-NSC08B-S26G          |                                |                            |
|                                               | NC                | ⑤ |                       |                                |                                |                            |
| Supply voltage U <sub>B</sub>                 | 10...30 V DC      |   | 10...30 V DC          | 10...30 V DC                   | 10...30 V DC                   | 10...30 V DC               |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 3 V             |   | ≤ 3 V                 | ≤ 3 V                          | ≤ 3 V                          | ≤ 3 V                      |
| Rated insulation voltage U <sub>i</sub>       | 75 V DC           |   | 75 V DC               | 75 V DC                        | 75 V DC                        | 75 V DC                    |
| Rated operational current I <sub>e</sub>      | 100 mA            |   | 100 mA                | 100 mA                         | 100 mA                         | 100 mA                     |
| No-load supply current I <sub>0</sub> max.    | ≤ 12 mA           |   | ≤ 12 mA               | ≤ 10 mA                        | ≤ 12 mA                        |                            |
| Polarity reversal protected                   | yes               |   | yes                   | yes                            | yes                            | yes                        |
| Short circuit protected                       | yes               |   | yes                   | yes                            | yes                            | yes                        |
| Repeat accuracy R                             | ≤ 5 %             |   | ≤ 5 %                 | ≤ 5 %                          | ≤ 5 %                          | ≤ 5 %                      |
| Ambient temperature range T <sub>a</sub>      | -25...+70 °C      |   | -25...+70 °C          | -25...+70 °C                   | -25...+70 °C                   | -25...+70 °C               |
| Switching frequency f                         | 3000 Hz           |   | 3000 Hz               | 3000 Hz                        | 3000 Hz                        | 3000 Hz                    |
| Utilization category                          | DC 13             |   | DC 13                 | DC 13                          | DC 13                          | DC 13                      |
| Function indicator                            | yes               |   | yes                   | yes                            | yes                            | yes                        |
| Degree of protection per IEC 60529            | IP 67             |   | IP 67                 | IP 67                          | IP 67                          | IP 67                      |
| Housing material                              | Stainless steel   |   | Stainless steel       | Stainless steel                | Stainless steel                | Stainless steel            |
| Material of sensing face                      | POM               |   | POM                   | POM                            | POM                            | POM                        |
| Connection                                    | Connector         |   | Connector             | 0.3 m PUR cable with connector | 0.3 m PUR cable with connector |                            |
| No. of wires × cross-section                  |                   |   |                       |                                |                                |                            |
| Approval                                      | cULus             |   | cULus                 | cULus                          | cULus                          | cULus                      |
| Recommended connector                         | BKS-_ 48/BKS-_ 49 |   | BKS-B 25/BKS-B 26     | BKS-_ 19                       | BKS-_ 48                       |                            |

① Wiring diagrams see page 1.0.6

Switching distance ■■ see page 1.0.10

Other cable lengths on request.

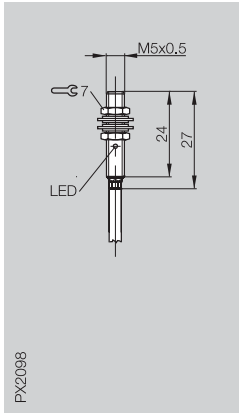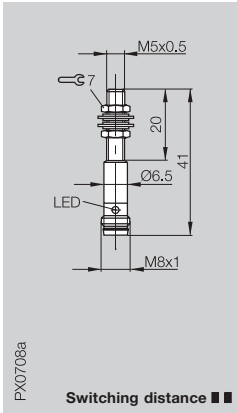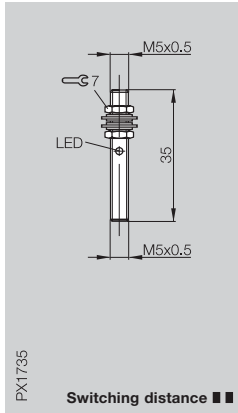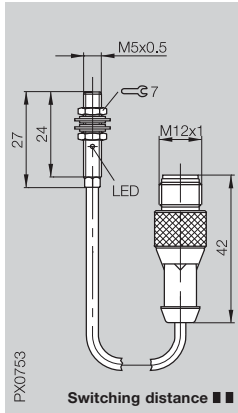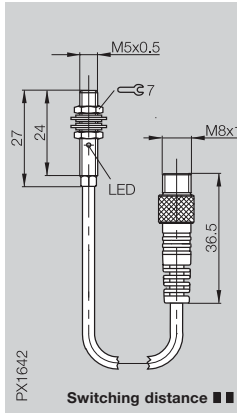





| M5×0.5<br>flush<br>0.8 mm<br>0...0.6 mm                                           | M5×0.5<br>flush<br>1.5 mm<br>0...1.2 mm                                           | M5×0.5<br>flush<br>1.5 mm<br>0...1.2 mm                                           | M5×0.5<br>flush<br>1.5 mm<br>0...1.2 mm                                            | M5×0.5<br>flush<br>1.5 mm<br>0...1.2 mm                                             |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |
| PX2098                                                                            | PX0708a<br>Switching distance ■ ■                                                 | PX1735<br>Switching distance ■ ■                                                  | PX0753<br>Switching distance ■ ■                                                   | PX1642<br>Switching distance ■ ■                                                    |
| BES 516-3005-E4-C-PU-02                                                           | BES 516-3005-G-E5-C-S49<br>BES 516-3022-G-E5-C-S49                                | BES M05ED-PSC15B-S26G                                                             | BES 516-3005-G-E4-C-S4-00,2                                                        | BES 516-3005-G-E4-C-S49-00,3<br>BES 516-3022-G-E4-C-S49-00,3                        |
|                                                                                   | BES 516-3006-G-E5-C-S49<br>BES 516-3023-G-E5-C-S49                                |                                                                                   |                                                                                    |                                                                                     |
| 10...30 V DC<br>≤ 3 V<br>75 V DC<br>100 mA<br>≤ 12 mA<br>yes<br>yes               | 10...30 V DC<br>≤ 3 V<br>75 V DC<br>100 mA<br>≤ 12 mA<br>yes<br>yes               | 10...30 V DC<br>≤ 3 V<br>75 V DC<br>100 mA<br>≤ 10 mA<br>yes<br>yes               | 10...30 V DC<br>≤ 3 V<br>75 V DC<br>100 mA<br>≤ 12 mA<br>yes<br>yes                | 10...30 V DC<br>≤ 3 V<br>75 V DC<br>100 mA<br>≤ 12 mA<br>yes<br>yes                 |
| ≤ 5 %<br>-25...+70 °C<br>3000 Hz<br>DC 13<br>yes                                  | ≤ 5 %<br>-25...+70 °C<br>3000 Hz<br>DC 13<br>yes                                  | ≤ 5 %<br>-25...+70 °C<br>3000 Hz<br>DC 13<br>yes                                  | ≤ 5 %<br>-25...+70 °C<br>3000 Hz<br>DC 13<br>yes                                   | ≤ 5 %<br>-25...+70 °C<br>3000 Hz<br>DC 13<br>yes                                    |
| IP 67                                                                             | IP 67                                                                             | IP 67                                                                             | IP 67                                                                              | IP 67                                                                               |
| Stainless steel<br>POM<br>2 m cable PUR                                           | Stainless steel<br>POM<br>Connector                                               | Stainless steel<br>POM<br>Connector                                               | Stainless steel<br>POM<br>0.2 m PUR cable with<br>connector                        | Stainless steel<br>POM<br>0.3 m PUR cable with<br>connector                         |
| 3×0.14 mm <sup>2</sup><br>cULus                                                   | cULus<br>BKS-_ 48/BKS-_ 49                                                        | cULus<br>BKS-B 25/BKS-B 26                                                        | cULus<br>BKS-_ 19                                                                  | cULus<br>BKS-_ 48                                                                   |

1.1

5

Connectors,  
Holders ...  
Page 5.2 ...

|                                           |               |               |               |               |  |
|-------------------------------------------|---------------|---------------|---------------|---------------|--|
| Housing size                              | <b>M5x0.5</b> | <b>M5x0.5</b> | <b>M5x0.5</b> | <b>M5x0.5</b> |  |
| Mounting (see notes starting p. 1.0.11)   | flush         | flush         | non-flush     | non-flush     |  |
| Rated operating distance s <sub>n</sub>   | <b>1.5 mm</b> | <b>1.5 mm</b> | <b>5 mm</b>   | <b>5 mm</b>   |  |
| Assured operating distance s <sub>a</sub> | 0...1.2 mm    | 0...1.2 mm    | 0...4.1 mm    | 0...4.1 mm    |  |

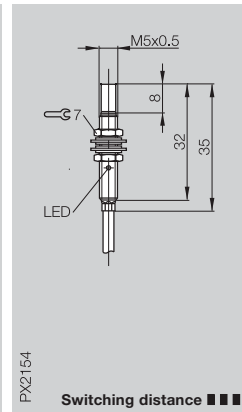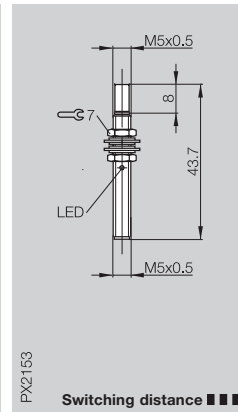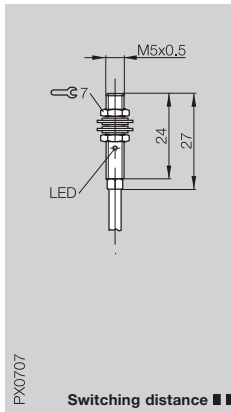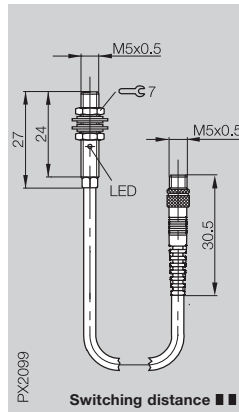

|                                               |                                |   |                              |                           |                       |                       |  |
|-----------------------------------------------|--------------------------------|---|------------------------------|---------------------------|-----------------------|-----------------------|--|
| PNP                                           | NO                             | ① | BES 516-3005-G-E4-C-S26-00,3 | BES 516-3005-G-E4-C-PU-02 | BES M05ED-PSC50F-S26G | BES M05ED-PSC50F-EP02 |  |
|                                               | NC                             | ② |                              | BES 516-3022-G-E4-C-PU-02 |                       |                       |  |
| NPN                                           | NO                             | ④ |                              | BES 516-3006-G-E4-C-PU-02 |                       |                       |  |
|                                               | NC                             | ⑤ |                              | BES 516-3023-G-E4-C-PU-02 |                       |                       |  |
| Supply voltage U <sub>B</sub>                 | 10...30 V DC                   |   | 10...30 V DC                 |                           | 10...30 V DC          |                       |  |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 3 V                          |   | ≤ 3 V                        |                           | ≤ 2.5 V               |                       |  |
| Rated insulation voltage U <sub>i</sub>       | 75 V DC                        |   | 75 V DC                      |                           | 75 V DC               |                       |  |
| Rated operational current I <sub>e</sub>      | 100 mA                         |   | 100 mA                       |                           | 100 mA                |                       |  |
| No-load supply current I <sub>0</sub> max.    | ≤ 12 mA                        |   | ≤ 12 mA                      |                           | ≤ 10 mA               |                       |  |
| Polarity reversal protected                   | yes                            |   | yes                          |                           | yes                   |                       |  |
| Short circuit protected                       | yes                            |   | yes                          |                           | yes                   |                       |  |
| Repeat accuracy R                             | ≤ 5 %                          |   | ≤ 5 %                        |                           | ≤ 10 %                |                       |  |
| Ambient temperature range T <sub>a</sub>      | -25...+70 °C                   |   | -25...+70 °C                 |                           | -25...+70 °C          |                       |  |
| Switching frequency f                         | 3000 Hz                        |   | 3000 Hz                      |                           | 3000 Hz               |                       |  |
| Utilization category                          | DC 13                          |   | DC 13                        |                           | DC 13                 |                       |  |
| Function indicator                            | yes                            |   | yes                          |                           | yes                   |                       |  |
| Degree of protection per IEC 60529            | IP 67                          |   | IP 67                        |                           | IP 67                 |                       |  |
| Insulation class                              |                                |   |                              |                           |                       |                       |  |
| Housing material                              | Stainless steel                |   | Stainless steel              |                           | Stainless steel       |                       |  |
| Material of sensing face                      | POM                            |   | POM                          |                           | POM                   |                       |  |
| Connection                                    | 0.3 m PUR cable with connector |   | 2 m cable PUR                |                           | Connector             |                       |  |
| No. of wires × cross-section                  |                                |   | 3×0.14 mm <sup>2</sup>       |                           |                       |                       |  |
| Approval                                      | cULus                          |   | cULus                        |                           | cULus                 |                       |  |
| Recommended connector                         | BKS-B 25                       |   |                              |                           | BKS-B 25/BKS-B 26     |                       |  |

① Wiring diagrams see page 1.0.6  
Switching distance ■■■ see page 1.0.10

Other cable lengths on request.




Ø 6.5 mm

Inductive  
Sensors

DC 3-wire  
Ø 6.5 mm  
s<sub>n</sub> 1.5 mm

|            |            |            |            |            |
|------------|------------|------------|------------|------------|
| Ø 6.5 mm   | Ø 6.5 mm   | Ø 6.5 mm   | Ø 6.5 mm   | Ø 6.5 mm   |
| flush      | flush      | flush      | flush      | flush      |
| 1.5 mm     | 1.5 mm     | 1.5 mm     | 1.5 mm     | 1.5 mm     |
| 0...1.2 mm | 0...1.2 mm | 0...1.2 mm | 0...1.2 mm | 0...1.2 mm |

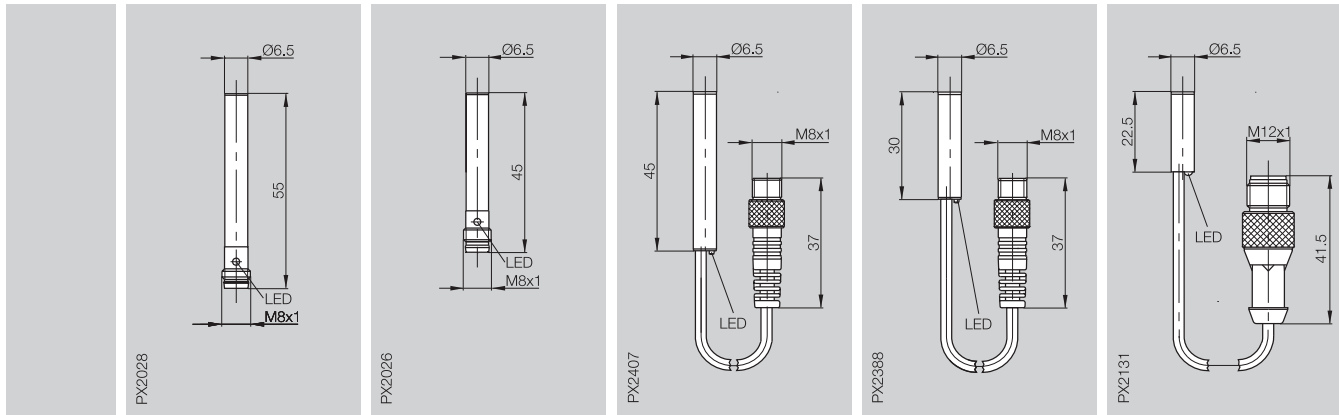

1.1

|                   |                      |                                |                                |                                |
|-------------------|----------------------|--------------------------------|--------------------------------|--------------------------------|
| BES 516-371-S49-C | BES 516-371-E5-C-S49 | BES 516-371-E0-C-S49-00,5      | BES 516-371-E4-C-S49-00,3      | BES 516-371-SA10-S4-00,3       |
| 10...30 V DC      | 10...30 V DC         | 10...30 V DC                   | 10...30 V DC                   | 10...30 V DC                   |
| ≤ 2.5 V           | ≤ 2.5 V              | ≤ 2.5 V                        | ≤ 2.5 V                        | ≤ 2.5 V                        |
| 75 V DC           | 75 V DC              | 250 V AC                       | 250 V AC                       | 75 V DC                        |
| 200 mA            | 200 mA               | 200 mA                         | 200 mA                         | 200 mA                         |
| ≤ 9 mA            | ≤ 9 mA               | ≤ 9 mA                         | ≤ 9 mA                         | ≤ 10 mA                        |
| yes               | yes                  | yes                            | yes                            | yes                            |
| yes               | yes                  | yes                            | yes                            | yes                            |
| ≤ 5 %             | ≤ 5 %                | ≤ 5 %                          | ≤ 5 %                          | ≤ 5 %                          |
| -25...+70 °C      | -25...+70 °C         | -25...+70 °C                   | -25...+70 °C                   | -25...+70 °C                   |
| 3000 Hz           | 3000 Hz              | 3000 Hz                        | 3000 Hz                        | 4000 Hz                        |
| DC 13             | DC 13                | DC 13                          | DC 13                          | DC 13                          |
| yes               | yes                  | yes                            | yes                            | yes                            |
| IP 67             | IP 67                | IP 68 per BWN Pr. 20           | IP 68 per BWN Pr. 20           | IP 67                          |
| Stainless steel   | Stainless steel      | Stainless steel                | Stainless steel                | Stainless steel                |
| PA 12             | PA 12                | PA 12                          | PA 12                          | PBT                            |
| Connector         | Connector            | 0.5 m PUR cable with connector | 0.3 m PUR cable with connector | 0.3 m PUR cable with connector |
| cULus             | cULus                | cULus                          | cULus                          |                                |
| BKS-_ 48/BKS-_ 49 | BKS-_ 48/BKS-_ 49    | BKS-_ 48                       | BKS-_ 48                       | BKS-_ 19                       |



5





Connectors,  
Holders ...  
Page 5.2 ...

## Inductive Sensors

DC 3-wire  
 $\varnothing$  6.5 mm  
 $s_n$  1.5 mm

$\varnothing$  6.5 mm

|                                         |                      |                      |                      |                      |  |
|-----------------------------------------|----------------------|----------------------|----------------------|----------------------|--|
| Housing size                            | $\varnothing$ 6.5 mm | $\varnothing$ 6.5 mm | $\varnothing$ 6.5 mm | $\varnothing$ 6.5 mm |  |
| Mounting (see notes starting p. 1.0.11) | flush                | flush                | flush                | flush                |  |
| Rated operating distance $s_n$          | 1.5 mm               | 1.5 mm               | 1.5 mm               | 1.5 mm               |  |
| Assured operating distance $s_a$        | 0...1.2 mm           | 0...1.2 mm           | 0...1.2 mm           | 0...1.2 mm           |  |

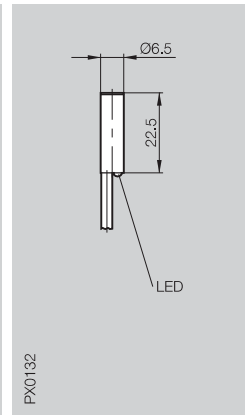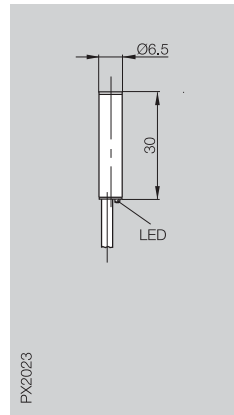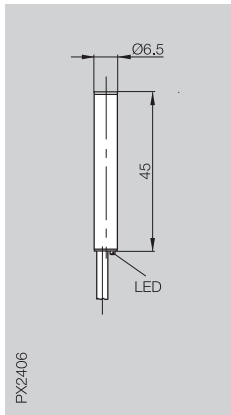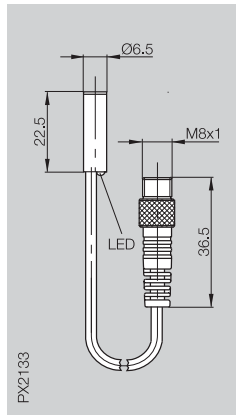

|                                     |                                 |   |                           |                     |                     |                     |  |
|-------------------------------------|---------------------------------|---|---------------------------|---------------------|---------------------|---------------------|--|
| PNP                                 | NO                              | ① | BES 516-371-SA10-S49-00,3 | BES 516-371-E0-C-02 | BES 516-371-E4-C-02 | BES 516-371-SA10-02 |  |
|                                     | NC                              | ② |                           |                     |                     |                     |  |
| NPN                                 | NO                              | ④ |                           |                     | BES 516-372-E4-C-02 | BES 516-372-SA1-02  |  |
|                                     | NC                              | ⑤ |                           |                     |                     |                     |  |
| Supply voltage $U_B$                | 10...30 V DC                    |   |                           |                     |                     |                     |  |
| Voltage drop $U_d$ at $I_e$         | $\leq 2.5$ V                    |   |                           |                     |                     |                     |  |
| Rated insulation voltage $U_i$      | 75 V DC                         |   |                           |                     |                     |                     |  |
| Rated operational current $I_e$     | 200 mA                          |   |                           |                     |                     |                     |  |
| No-load supply current $I_0$ max.   | $\leq 10$ mA                    |   |                           |                     |                     |                     |  |
| Polarity reversal protected         | yes                             |   |                           |                     |                     |                     |  |
| Short circuit protected             | yes                             |   |                           |                     |                     |                     |  |
| Repeat accuracy R                   | $\leq 5$ %                      |   |                           |                     |                     |                     |  |
| Ambient temperature range $T_a$     | $-25...+70$ °C                  |   |                           |                     |                     |                     |  |
| Switching frequency f               | 4000 Hz                         |   |                           |                     |                     |                     |  |
| Utilization category                | DC 13                           |   |                           |                     |                     |                     |  |
| Function indicator                  | yes                             |   |                           |                     |                     |                     |  |
| Degree of protection per IEC 60529  | IP 67                           |   |                           |                     |                     |                     |  |
| Insulation class                    |                                 |   |                           |                     |                     |                     |  |
| Housing material                    | CuZn coated                     |   |                           |                     |                     |                     |  |
| Material of sensing face            | PBT                             |   |                           |                     |                     |                     |  |
| Connection                          | 0.3 m PUR cable with connector  |   |                           |                     |                     |                     |  |
| No. of wires $\times$ cross-section | 3 $\times$ 0.14 mm <sup>2</sup> |   |                           |                     |                     |                     |  |
| Approval                            | cULus                           |   |                           |                     |                     |                     |  |
| Recommended connector               | BKS-_ 48                        |   |                           |                     |                     |                     |  |

① Wiring diagrams see page 1.0.6  
 Switching distance ■■ see page 1.0.10

For sensors with cable, other lengths and PUR quality are available on request.

For sensors with cable and connector, other lengths are available on request.








Ø 6.5 mm

# Inductive Sensors

DC 3-wire  
Ø 6.5 mm  
s<sub>n</sub> 2 mm

1.1
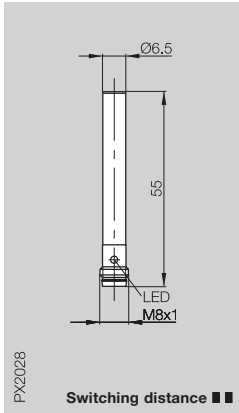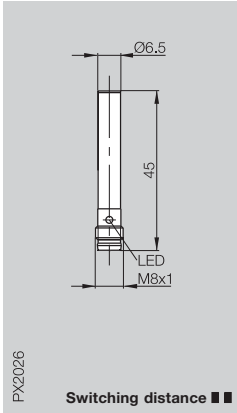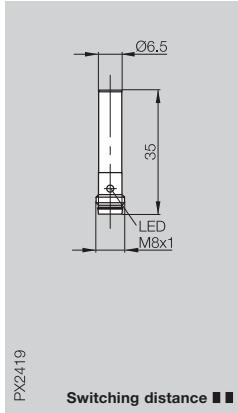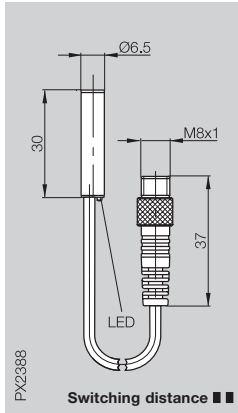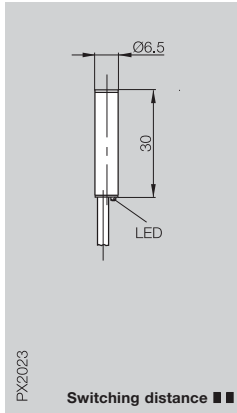
| Ø 6.5 mm<br>flush<br>2 mm<br>0...1.6 mm                                           | Ø 6.5 mm<br>flush<br>2 mm<br>0...1.6 mm                                           | Ø 6.5 mm<br>flush<br>2 mm<br>0...1.6 mm                                           | Ø 6.5 mm<br>flush<br>2 mm<br>0...1.6 mm                                            | Ø 6.5 mm<br>flush<br>2 mm<br>0...1.6 mm                                             |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |
| PX2028                                                                            | PX2026                                                                            | PX2419                                                                            | PX2388                                                                             | PX2023                                                                              |
| Switching distance ■ ■                                                            | Switching distance ■ ■                                                            | Switching distance ■ ■                                                            | Switching distance ■ ■                                                             | Switching distance ■ ■                                                              |
| BES 516-371-G-S49-C                                                               | BES 516-371-G-E5-C-S49<br>BES 516-3021-G-E5-C-S49                                 | BES 516-371-SA15-C-S49                                                            | BES 516-371-G-E4-C-S49-00,3                                                        | BES 516-371-G-E4-C-02<br>BES 516-3021-G-E4-C-02                                     |
|                                                                                   | BES 516-372-G-E5-C-S49<br>BES 516-3025-G-E5-C-S49                                 |                                                                                   |                                                                                    | BES 516-372-G-E4-C-02                                                               |
| 10...30 V DC<br>≤ 2.5 V<br>75 V DC<br>200 mA<br>≤ 9 mA<br>yes<br>yes              | 10...30 V DC<br>≤ 2.5 V<br>75 V DC<br>200 mA<br>≤ 18 mA<br>yes<br>yes             | 10...30 V DC<br>≤ 2.5 V<br>75 V DC<br>200 mA<br>≤ 9 mA<br>yes<br>yes              | 10...30 V DC<br>≤ 2.5 V<br>250 V AC<br>200 mA<br>≤ 9 mA<br>yes<br>yes              | 10...30 V DC<br>≤ 2.5 V<br>250 V AC<br>200 mA<br>≤ 18 mA<br>yes<br>yes              |
| ≤ 5 %<br>-25...+70 °C<br>1500 Hz<br>DC 13<br>yes                                  | ≤ 5 %<br>-25...+70 °C<br>1500 Hz<br>DC 13<br>yes                                  | ≤ 5 %<br>-25...+70 °C<br>1500 Hz<br>DC 13<br>yes                                  | ≤ 5 %<br>-25...+70 °C<br>1500 Hz<br>DC 13<br>yes                                   | ≤ 5 %<br>-25...+70 °C<br>1500 Hz<br>DC 13<br>yes                                    |
| IP 67                                                                             | IP 67                                                                             | IP 67                                                                             | IP 68 per BWN Pr. 20<br>□                                                          | IP 68 per BWN Pr. 20<br>□                                                           |
| Stainless steel<br>PA 12<br>Connector                                             | Stainless steel<br>PA 12<br>Connector                                             | Stainless steel<br>PA 12<br>Connector                                             | Stainless steel<br>PA 12<br>0.3 m PUR cable with<br>connector                      | Stainless steel<br>PA 12<br>2 m PVC cable                                           |
| cULus<br>BKS-_ 48/BKS-_ 49                                                        | cULus<br>BKS-_ 48/BKS-_ 49                                                        | cULus<br>BKS-_ 48/BKS-_ 49                                                        | cULus<br>BKS-_ 48                                                                  | 3x0.14 mm <sup>2</sup><br>cULus                                                     |



5

Connectors,  
Holders ...  
Page 5.2 ...







# Inductive Sensors

DC 3-wire  
 Ø 6.5 mm  
 s<sub>n</sub> 2 mm, 2.5 mm, 3 mm

Ø 6.5 mm

|                                           |            |             |             |           |  |
|-------------------------------------------|------------|-------------|-------------|-----------|--|
| Housing size                              | Ø 6.5 mm   | Ø 6.5 mm    | Ø 6.5 mm    | Ø 6.5 mm  |  |
| Mounting (see notes starting p. 1.0.11)   | flush      | quasi flush | quasi flush | non-flush |  |
| Rated operating distance s <sub>n</sub>   | 2 mm       | 3 mm        | 3 mm        | 2.5 mm    |  |
| Assured operating distance s <sub>a</sub> | 0...1.6 mm | 0...2.4 mm  | 0...2.4 mm  | 0...2 mm  |  |

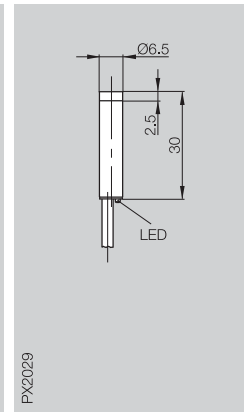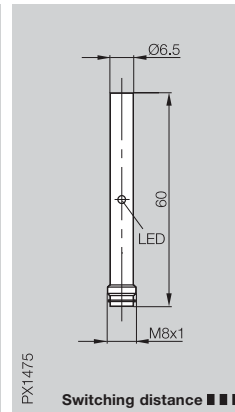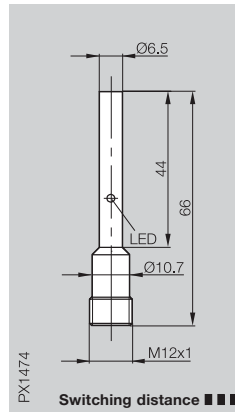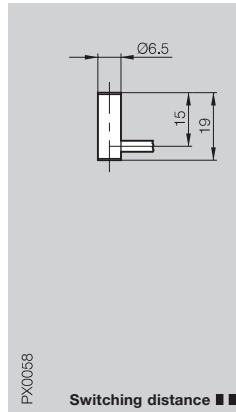

|                                               |                        |   |                        |                        |                       |                        |  |
|-----------------------------------------------|------------------------|---|------------------------|------------------------|-----------------------|------------------------|--|
| PNP                                           | NO                     | ① | BES 516-371-SA13-PU-02 | BES G06MH1-PSC30B-S04G | BES G06MI-PSC30B-S49G | BES 516-349-E4-C-02    |  |
|                                               | NC                     | ② |                        |                        | BES G06MI-POC30B-S49G |                        |  |
| NPN                                           | NO                     | ④ |                        | BES G06MH1-NSC30B-S04G | BES G06MI-NSC30B-S49G | BES 516-350-E4-C-02    |  |
|                                               | NC                     | ⑤ |                        |                        | BES G06MI-NOC30B-S49G |                        |  |
| Supply voltage U <sub>B</sub>                 | 10...30 V DC           |   | 10...30 V DC           | 10...30 V DC           | 10...30 V DC          | 10...30 V DC           |  |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 2.5 V                |   | ≤ 2.5 V                | ≤ 2.5 V                | ≤ 2.5 V               | ≤ 2.5 V                |  |
| Rated insulation voltage U <sub>i</sub>       | 75 V DC                |   | 75 V DC                | 75 V DC                | 75 V DC               | 250 V AC               |  |
| Rated operational current I <sub>e</sub>      | 200 mA                 |   | 200 mA                 | 200 mA                 | 200 mA                | 200 mA                 |  |
| No-load supply current I <sub>0</sub> max.    | ≤ 10 mA                |   | ≤ 12 mA                | ≤ 12 mA                | ≤ 12 mA               | ≤ 18 mA                |  |
| Polarity reversal protected                   | yes                    |   | yes                    | yes                    | yes                   | yes                    |  |
| Short circuit protected                       | yes                    |   | yes                    | yes                    | yes                   | yes                    |  |
| Repeat accuracy R                             | ≤ 5 %                  |   | ≤ 5 %                  | ≤ 5 %                  | ≤ 5 %                 | ≤ 5 %                  |  |
| Ambient temperature range T <sub>a</sub>      | -25...+70 °C           |   | -25...+70 °C           | -25...+70 °C           | -25...+70 °C          | -25...+70 °C           |  |
| Switching frequency f                         | 2000 Hz                |   | 1000 Hz                | 1000 Hz                | 1000 Hz               | 2000 Hz                |  |
| Utilization category                          | DC 13                  |   | DC 13                  | DC 13                  | DC 13                 | DC 13                  |  |
| Function indicator                            | no                     |   | yes                    | yes                    | yes                   | yes                    |  |
| Degree of protection per IEC 60529            | IP 65                  |   | IP 67                  | IP 67                  | IP 67                 | IP 68 per BWN Pr. 20   |  |
| Insulation class                              |                        |   |                        |                        |                       | □                      |  |
| Housing material                              | Stainless steel        |   | CuZn coated            | CuZn coated            | CuZn coated           | Stainless steel        |  |
| Material of sensing face                      | PBT                    |   | PBT                    | PBT                    | PBT                   | PA 12                  |  |
| Connection                                    | 2 m cable PUR          |   | Connector              | Connector              | Connector             | 2 m PVC cable          |  |
| No. of wires × cross-section                  | 3×0.14 mm <sup>2</sup> |   |                        |                        |                       | 3×0.14 mm <sup>2</sup> |  |
| Approval                                      |                        |   |                        |                        |                       | cULus                  |  |
| Recommended connector                         |                        |   | BKS- 19/BKS- 20        | BKS- 48/BKS- 49        | BKS- 48/BKS- 49       |                        |  |

① Wiring diagrams see page 1.0.6  
 Switching distance ■■■ see page 1.0.10

Other cable lengths on request.






Ø 6.5 mm, Ø 8 mm

Inductive  
Sensors

DC 3-wire  
Ø 6.5 mm, Ø 8 mm  
s<sub>n</sub> 1.5 mm, 4 mm

|                                             |                                             |                                             |  |                                         |
|---------------------------------------------|---------------------------------------------|---------------------------------------------|--|-----------------------------------------|
| Ø 6.5 mm<br>non-flush<br>4 mm<br>0...3.2 mm | Ø 6.5 mm<br>non-flush<br>4 mm<br>0...3.2 mm | Ø 6.5 mm<br>non-flush<br>4 mm<br>0...3.2 mm |  | Ø 8 mm<br>flush<br>1.5 mm<br>0...1.2 mm |
|---------------------------------------------|---------------------------------------------|---------------------------------------------|--|-----------------------------------------|

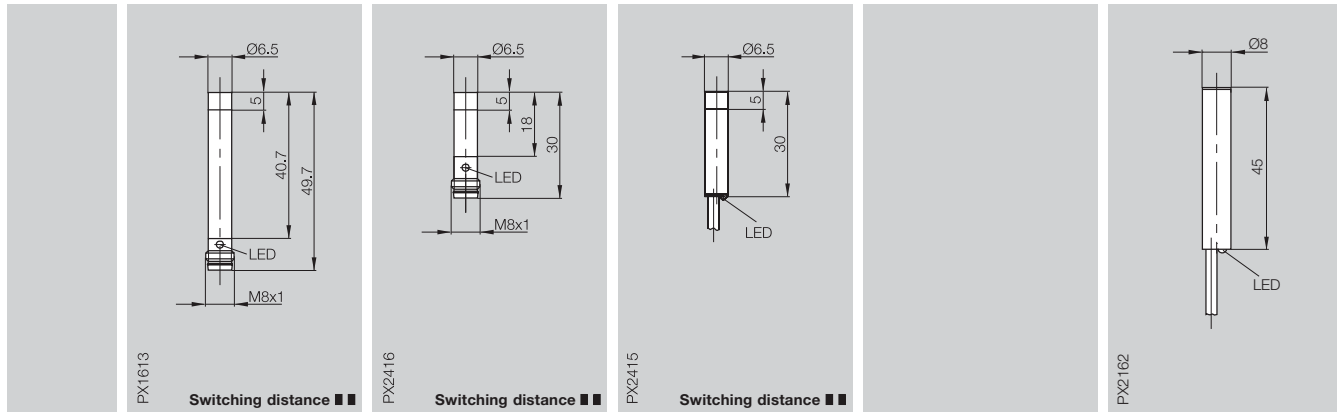

|                                                                       |                                                                       |                                                                              |  |                                                                            |
|-----------------------------------------------------------------------|-----------------------------------------------------------------------|------------------------------------------------------------------------------|--|----------------------------------------------------------------------------|
| BES G06EF-PSC40F-S49G                                                 | BES G06EB-PSC40F-S49G<br>BES G06EB-POC40F-S49G                        | BES G06ED-PSC40F-BV02<br>BES G06ED-POC40F-BV02                               |  | BES G08EG-PSC15B-BV02                                                      |
|                                                                       | BES G06EB-NSC40F-S49G<br>BES G06EB-NOC40F-S49G                        | BES G06ED-NSC40F-BV02<br>BES G06ED-NOC40F-BV02                               |  |                                                                            |
| 10...30 V DC<br>≤ 2.5 V<br>75 V DC<br>200 mA<br>≤ 12 mA<br>yes<br>yes | 10...30 V DC<br>≤ 2.5 V<br>75 V DC<br>200 mA<br>≤ 18 mA<br>yes<br>yes | 10...30 V DC<br>≤ 2.5 V<br>250 V AC<br>200 mA<br>≤ 18 mA<br>yes<br>yes       |  | 10...30 V DC<br>≤ 2.5 V<br>250 V AC<br>200 mA<br>≤ 9 mA<br>yes<br>yes      |
| ≤ 5 %<br>-25...+70 °C<br>5000 Hz<br>DC 13<br>yes                      | ≤ 5 %<br>-25...+70 °C<br>1500 Hz<br>DC 13<br>yes                      | ≤ 5 %<br>-25...+70 °C<br>1500 Hz<br>DC 13<br>yes                             |  | ≤ 5 %<br>-25...+70 °C<br>3000 Hz<br>DC 13<br>yes                           |
| IP 67                                                                 | IP 67                                                                 | IP 68 per BWN Pr. 20<br>☐                                                    |  | IP 68 per BWN Pr. 20<br>☐                                                  |
| Stainless steel<br>PBT<br>Connector                                   | Stainless steel<br>PA 12<br>Connector                                 | Stainless steel<br>PA 12<br>2 m PVC cable<br>3x0.14 mm <sup>2</sup><br>cULus |  | Stainless steel<br>PBT<br>2 m PVC cable<br>3x0.14 mm <sup>2</sup><br>cULus |
| cULus<br>BKS- 48/BKS- 49                                              | cULus<br>BKS- 48/BKS- 49                                              |                                                                              |  |                                                                            |







1.1

5

Connectors,  
Holders ...  
Page 5.2 ...

|                                           |               |               |               |               |  |
|-------------------------------------------|---------------|---------------|---------------|---------------|--|
| Housing size                              | <b>M8x1</b>   | <b>M8x1</b>   | <b>M8x1</b>   | <b>M8x1</b>   |  |
| Mounting (see notes starting p. 1.0.11)   | flush         | flush         | flush         | flush         |  |
| Rated operating distance s <sub>n</sub>   | <b>1.5 mm</b> | <b>1.5 mm</b> | <b>1.5 mm</b> | <b>1.5 mm</b> |  |
| Assured operating distance s <sub>a</sub> | 0...1.2 mm    | 0...1.2 mm    | 0...1.2 mm    | 0...1.2 mm    |  |


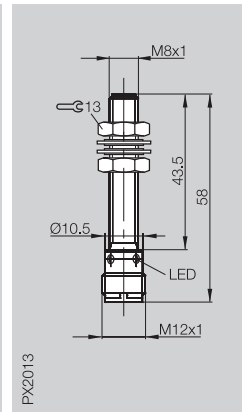
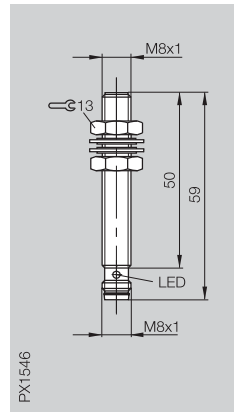
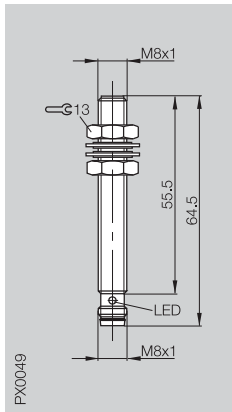
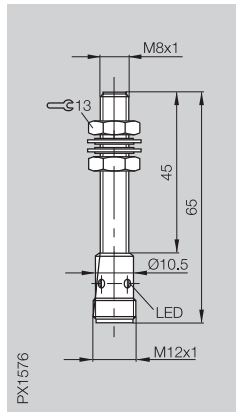


|                                               |                          |   |                        |                  |                          |                       |                         |
|-----------------------------------------------|--------------------------|---|------------------------|------------------|--------------------------|-----------------------|-------------------------|
| PNP                                           | NO                       | ① | BES M08MH1-PSC15B-S04G | BES 516-324-SA33 | BES M08MI-PSC15B-S49G    | BES M08EH-PSC15B-S04G |                         |
|                                               | NC                       | ② | BES M08MH1-POC15B-S04G |                  |                          | BES M08EH-POC15B-S04G |                         |
| NPN                                           | NO                       | ④ | BES M08MH1-NSC15B-S04G |                  | BES M08MI-NSC15B-S49G    | BES M08EH-NSC15B-S04G |                         |
|                                               | NC                       | ⑤ | BES M08MH1-NOC15B-S04G |                  |                          | BES M08EH-NOC15B-S04G |                         |
| Supply voltage U <sub>B</sub>                 | 12...30 V DC             |   | 10...30 V DC           |                  | 12...30 V DC             |                       | 10...30 V DC            |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 3 V                    |   | ≤ 2.5 V                |                  | ≤ 3 V                    |                       | ≤ 2.5 V                 |
| Rated insulation voltage U <sub>i</sub>       | 75 V DC                  |   | 75 V DC                |                  | 75 V DC                  |                       | 250 V AC                |
| Rated operational current I <sub>e</sub>      | 100 mA                   |   | 200 mA                 |                  | 100 mA                   |                       | 200 mA                  |
| No-load supply current I <sub>0</sub> max.    | PNP ≤ 12 mA, NPN ≤ 18 mA |   | ≤ 25 mA                |                  | PNP ≤ 12 mA, NPN ≤ 18 mA |                       | PNP ≤ 9 mA, NPN ≤ 18 mA |
| Polarity reversal protected                   | yes                      |   | yes                    |                  | yes                      |                       | yes                     |
| Short circuit protected                       | yes                      |   | yes                    |                  | yes                      |                       | yes                     |
| Repeat accuracy R                             | ≤ 5 %                    |   | ≤ 5 %                  |                  | ≤ 5 %                    |                       | ≤ 5 %                   |
| Ambient temperature range T <sub>a</sub>      | -25...+70 °C             |   | -25...+70 °C           |                  | -25...+70 °C             |                       | -25...+70 °C            |
| Switching frequency f                         | 1000 Hz                  |   | 1000 Hz                |                  | 1000 Hz                  |                       | 3000 Hz                 |
| Utilization category                          | DC 13                    |   | DC 13                  |                  | DC 13                    |                       | DC 13                   |
| Function indicator                            | yes                      |   | yes                    |                  | yes                      |                       | yes                     |
| Degree of protection per IEC 60529            | IP 67                    |   | IP 67                  |                  | IP 67                    |                       | IP 68 per BWN Pr. 20    |
| Insulation class                              |                          |   |                        |                  |                          |                       | □                       |
| Housing material                              | CuZn coated              |   | Stainless steel        |                  | CuZn coated              |                       | Stainless steel         |
| Material of sensing face                      | PA 12                    |   | PBT                    |                  | PA 12                    |                       | PBT                     |
| Connection                                    | Connector                |   | Connector              |                  | Connector                |                       | Connector               |
| Approval                                      | cULus                    |   |                        |                  | cULus                    |                       | cULus                   |
| Recommended connector                         | BKS-_ 19/BKS-_ 20        |   | BKS-_ 48/BKS-_ 49      |                  | BKS-_ 48/BKS-_ 49        |                       | BKS-_ 19/BKS-_ 20       |

① Wiring diagrams see page 1.0.6

Other cable lengths on request.

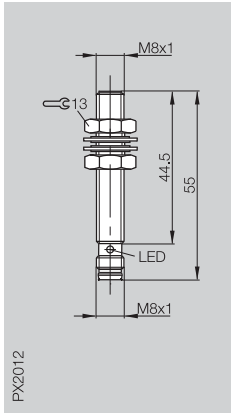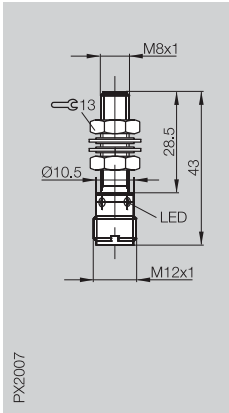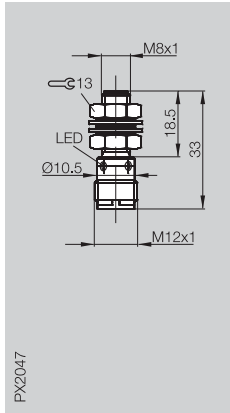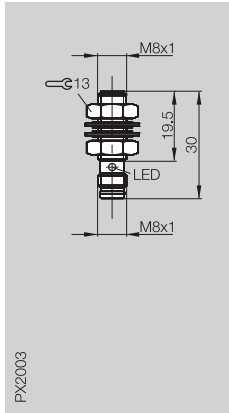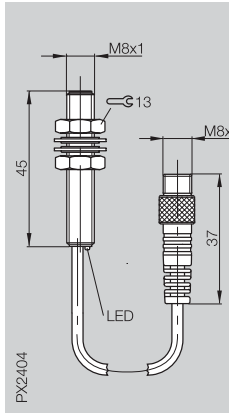

|                                                                                   | M8x1<br>flush<br>1.5 mm<br>0...1.2 mm                                                  | M8x1<br>flush<br>1.5 mm<br>0...1.2 mm                                                  | M8x1<br>flush<br>1.5 mm<br>0...1.2 mm                                              | M8x1<br>flush<br>1.5 mm<br>0...1.2 mm                                                  | M8x1<br>flush<br>1.5 mm<br>0...1.2 mm                                 |
|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|-----------------------------------------------------------------------|
|  |       |       |  |     |                                                                       |
|                                                                                   | BES 516-324-S49-C<br>BES 516-377-S49-C                                                 | BES M08EE-PSC15B-S04G<br>BES M08EE-POC15B-S04G                                         | BES M08EC-PSC15B-S04G                                                              | BES M08EC-PSC15B-S49G<br>BES M08EC-POC15B-S49G                                         | BES 516-324-E0-C-S49-00,2<br>BES 516-377-E0-C-S49-00,2                |
|                                                                                   | BES 516-343-S49-C<br>BES 516-378-S49-C                                                 | BES M08EE-NSC15B-S04G                                                                  |                                                                                    | BES M08EC-NSC15B-S49G                                                                  |                                                                       |
|                                                                                   | 10...30 V DC<br>≤ 2.5 V<br>250 V AC<br>200 mA<br>PNP ≤ 9 mA, NPN ≤ 18 mA<br>yes<br>yes | 10...30 V DC<br>≤ 2.5 V<br>250 V AC<br>200 mA<br>PNP ≤ 9 mA, NPN ≤ 18 mA<br>yes<br>yes | 10...30 V DC<br>≤ 2.5 V<br>250 V AC<br>200 mA<br>≤ 9 mA<br>yes<br>yes              | 10...30 V DC<br>≤ 2.5 V<br>250 V AC<br>200 mA<br>PNP ≤ 9 mA, NPN ≤ 18 mA<br>yes<br>yes | 10...30 V DC<br>≤ 2.5 V<br>250 V AC<br>200 mA<br>≤ 9 mA<br>yes<br>yes |
|                                                                                   | ≤ 5 %<br>-25...+70 °C<br>3000 Hz<br>DC 13<br>yes                                       | ≤ 5 %<br>-25...+70 °C<br>3000 Hz<br>DC 13<br>yes                                       | ≤ 5 %<br>-25...+70 °C<br>3000 Hz<br>DC 13<br>yes                                   | ≤ 5 %<br>-25...+70 °C<br>3000 Hz<br>DC 13<br>yes                                       | ≤ 5 %<br>-25...+70 °C<br>3000 Hz<br>DC 13<br>yes                      |
|                                                                                   | IP 68 per BWN Pr. 20<br>□                                                              | IP 68 per BWN Pr. 20<br>□                                                              | IP 68 per BWN Pr. 20<br>□                                                          | IP 68 per BWN Pr. 20<br>□                                                              | IP 68 per BWN Pr. 20<br>□                                             |
|                                                                                   | Stainless steel<br>PA 12<br>Connector                                                  | Stainless steel<br>PBT<br>Connector                                                    | Stainless steel<br>PBT<br>Connector                                                | Stainless steel<br>PBT<br>Connector                                                    | Stainless steel<br>PA 12<br>0.2 m PUR cable with<br>connector         |
|                                                                                   | cULus<br>BKS-_ 48/BKS-_ 49                                                             | cULus<br>BKS-_ 19/BKS-_ 20                                                             | cULus<br>BKS-_ 19/BKS-_ 20                                                         | cULus<br>BKS-_ 48/BKS-_ 49                                                             | cULus<br>BKS-_ 48                                                     |







1.1

5

Connectors,  
Holders ...  
Page 5.2 ...

|                                           |               |               |               |               |  |
|-------------------------------------------|---------------|---------------|---------------|---------------|--|
| Housing size                              | <b>M8x1</b>   | <b>M8x1</b>   | <b>M8x1</b>   | <b>M8x1</b>   |  |
| Mounting (see notes starting p. 1.0.11)   | flush         | flush         | flush         | flush         |  |
| Rated operating distance s <sub>n</sub>   | <b>1.5 mm</b> | <b>1.5 mm</b> | <b>1.5 mm</b> | <b>1.5 mm</b> |  |
| Assured operating distance s <sub>a</sub> | 0...1.2 mm    | 0...1.2 mm    | 0...1.2 mm    | 0...1.2 mm    |  |

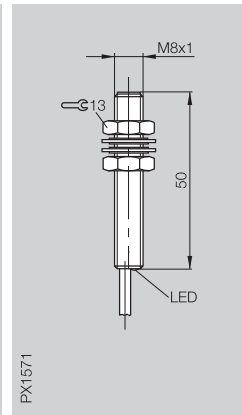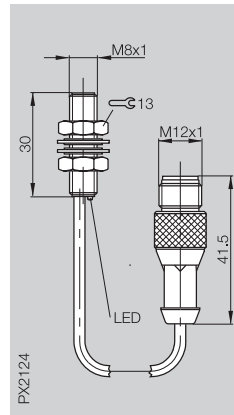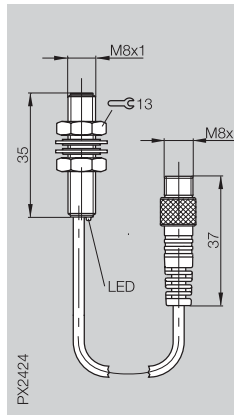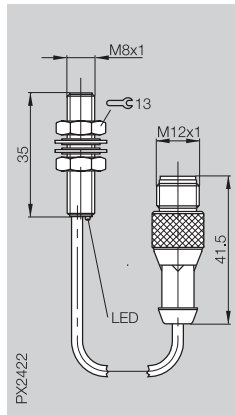


|                                               |                                |   |                                |                                |                                |                          |
|-----------------------------------------------|--------------------------------|---|--------------------------------|--------------------------------|--------------------------------|--------------------------|
| PNP                                           | NO                             | ① | BES 516-324-E3-C-S4-00,3       | BES 516-324-E3-C-S49-00,3      | BES 516-324-E4-C-S4-00,3       | BES M08MI-PSC15B-BV02    |
|                                               | NC                             | ② | BES 516-377-E3-C-S4-PU-00,3    |                                |                                | BES M08MI-POC15B-BV02    |
| NPN                                           | NO                             | ④ |                                |                                |                                | BES M08MI-NSC15B-BV02    |
|                                               | NC                             | ⑤ |                                |                                |                                |                          |
| Supply voltage U <sub>B</sub>                 | 10...30 V DC                   |   | 10...30 V DC                   | 10...30 V DC                   | 10...30 V DC                   | 12...30 V DC             |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 2.5 V                        |   | ≤ 2.5 V                        | ≤ 2.5 V                        | ≤ 2.5 V                        | ≤ 2.5 V                  |
| Rated insulation voltage U <sub>i</sub>       | 250 V AC                       |   | 250 V AC                       | 250 V AC                       | 250 V AC                       | 75 V DC                  |
| Rated operational current I <sub>e</sub>      | 200 mA                         |   | 200 mA                         | 200 mA                         | 200 mA                         | 100 mA                   |
| No-load supply current I <sub>0</sub> max.    | ≤ 9 mA                         |   | ≤ 9 mA                         | ≤ 9 mA                         | ≤ 9 mA                         | PNP ≤ 10 mA, NPN ≤ 18 mA |
| Polarity reversal protected                   | yes                            |   | yes                            | yes                            | yes                            | yes                      |
| Short circuit protected                       | yes                            |   | yes                            | yes                            | yes                            | yes                      |
| Repeat accuracy R                             | ≤ 5 %                          |   | ≤ 5 %                          | ≤ 5 %                          | ≤ 5 %                          | ≤ 5 %                    |
| Ambient temperature range T <sub>a</sub>      | -25...+70 °C                   |   | -25...+70 °C                   | -25...+70 °C                   | -25...+70 °C                   | -25...+70 °C             |
| Switching frequency f                         | 3000 Hz                        |   | 3000 Hz                        | 3000 Hz                        | 3000 Hz                        | 1000 Hz                  |
| Utilization category                          | DC 13                          |   | DC 13                          | DC 13                          | DC 13                          | DC 13                    |
| Function indicator                            | yes                            |   | yes                            | yes                            | yes                            | yes                      |
| Degree of protection per IEC 60529            | IP 68 per BWN Pr. 20           |   | IP 68 per BWN Pr. 20           | IP 68 per BWN Pr. 20           | IP 68 per BWN Pr. 20           | IP 67                    |
| Insulation class                              | □                              |   | □                              | □                              | □                              |                          |
| Housing material                              | Stainless steel                |   | Stainless steel                | Stainless steel                | Stainless steel                | CuZn coated              |
| Material of sensing face                      | PA 12                          |   | PA 12                          | PA 12                          | PA 12                          | PA 12                    |
| Connection                                    | 0.3 m PUR cable with connector |   | 0.3 m PUR cable with connector | 0.3 m PUR cable with connector | 0.3 m PUR cable with connector | 2 m PVC cable            |
| No. of wires × cross-section                  |                                |   |                                |                                |                                | 3×0.14 mm <sup>2</sup>   |
| Approval                                      | cULus                          |   | cULus                          | cULus                          | cULus                          | cULus                    |
| Recommended connector                         | BKS-_ 19                       |   | BKS-_ 48                       | BKS-_ 48                       | BKS-_ 19                       |                          |

① Wiring diagrams see page 1.0.6

Other cable lengths on request.



| M8x1       | M8x1       | M8x1       | M8x1       | M8x1       |
|------------|------------|------------|------------|------------|
| flush      | flush      | flush      | flush      | flush      |
| 1.5 mm     | 1.5 mm     | 1.5 mm     | 1.5 mm     | 1.5 mm     |
| 0...1.2 mm | 0...1.2 mm | 0...1.2 mm | 0...1.2 mm | 0...1.2 mm |

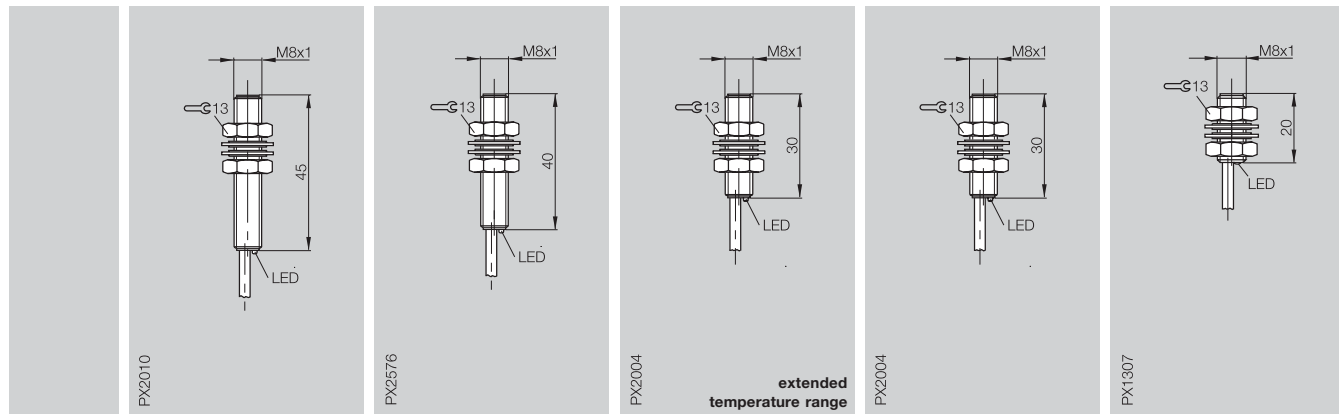

1.1





|                                                                                        |                                                                       |                                                                       |                                                                                        |                                                                        |
|----------------------------------------------------------------------------------------|-----------------------------------------------------------------------|-----------------------------------------------------------------------|----------------------------------------------------------------------------------------|------------------------------------------------------------------------|
| BES 516-324-E0-C-02<br>BES 516-377-E0-C-02                                             | BES M08EF-PSC15B-BP02<br>BES M08EF-POC15B-BP02                        | BES 516-324-SA45-E4-C-PU-03                                           | BES 516-324-E4-C-02<br>BES 516-377-E4-C-02                                             | BES 516-324-SA44-C-02                                                  |
| BES 516-343-E0-C-02<br>BES 516-378-E0-C-02                                             |                                                                       |                                                                       | BES 516-343-E4-C-02<br>BES 516-378-E4-C-02                                             |                                                                        |
| 10...30 V DC<br>≤ 2.5 V<br>250 V AC<br>200 mA<br>PNP ≤ 9 mA, NPN ≤ 11 mA<br>yes<br>yes | 10...30 V DC<br>≤ 2.5 V<br>250 V AC<br>200 mA<br>≤ 9 mA<br>yes<br>yes | 10...30 V DC<br>≤ 2.5 V<br>250 V AC<br>200 mA<br>≤ 9 mA<br>yes<br>yes | 10...30 V DC<br>≤ 2.5 V<br>250 V AC<br>200 mA<br>PNP ≤ 9 mA, NPN ≤ 11 mA<br>yes<br>yes | 10...30 V DC<br>≤ 2.5 V<br>250 V AC<br>200 mA<br>≤ 25 mA<br>yes<br>yes |
| ≤ 5 %<br>-25...+70 °C<br>3000 Hz<br>DC 13<br>yes                                       | ≤ 5 %<br>-25...+70 °C<br>3000 Hz<br>DC 13<br>yes                      | ≤ 5 %<br>-40...+85 °C<br>3000 Hz<br>DC 13<br>yes                      | ≤ 5 %<br>-25...+70 °C<br>3000 Hz<br>DC 13<br>yes                                       | ≤ 5 %<br>-25...+70 °C<br>1500 Hz<br>DC 13<br>yes                       |
| IP 68 per BWN Pr. 20<br>☐                                                              | IP 68 per BWN Pr. 20<br>☐                                             | IP 68 per BWN Pr. 20<br>☐                                             | IP 68 per BWN Pr. 20<br>☐                                                              | IP 67                                                                  |
| Stainless steel<br>PA 12<br>2 m PVC cable                                              | Stainless steel<br>PBT<br>2 m cable PUR                               | Stainless steel<br>PA 12<br>3 m cable PUR                             | Stainless steel<br>PA 12<br>2 m PVC cable                                              | Stainless steel<br>PBT<br>3 m PVC cable                                |
| 3x0.14 mm <sup>2</sup><br>cULus                                                        | 3x0.14 mm <sup>2</sup><br>cULus                                       | 3x0.14 mm <sup>2</sup><br>cULus                                       | 3x0.14 mm <sup>2</sup><br>cULus                                                        | 3x0.14 mm <sup>2</sup><br>cULus                                        |



5

Connectors,  
Holders ...  
Page 5.2 ...

|                                           |             |             |             |             |  |
|-------------------------------------------|-------------|-------------|-------------|-------------|--|
| Housing size                              | <b>M8x1</b> | <b>M8x1</b> | <b>M8x1</b> | <b>M8x1</b> |  |
| Mounting (see notes starting p. 1.0.11)   | flush       | flush       | flush       | flush       |  |
| Rated operating distance s <sub>n</sub>   | <b>2 mm</b> | <b>2 mm</b> | <b>2 mm</b> | <b>2 mm</b> |  |
| Assured operating distance s <sub>a</sub> | 0...1.6 mm  | 0...1.6 mm  | 0...1.6 mm  | 0...1.6 mm  |  |

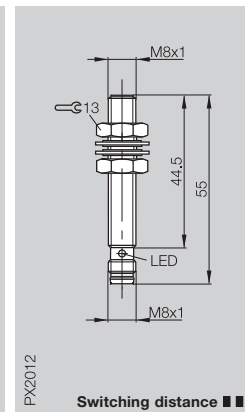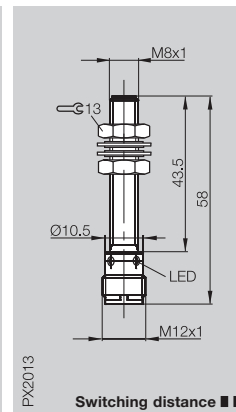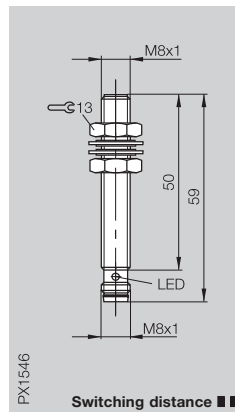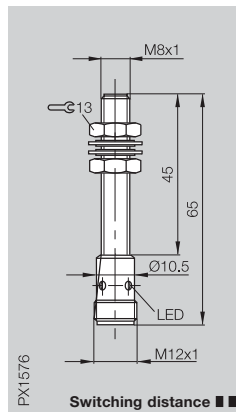

|                                               |                          |   |                          |                          |                       |                      |
|-----------------------------------------------|--------------------------|---|--------------------------|--------------------------|-----------------------|----------------------|
| PNP                                           | NO                       | ① | BES M08MH1-PSC20B-S04G   | BES M08MI-PSC20B-S49G    | BES M08EH-PSC20B-S04G | BES 516-324-G-S49-C  |
|                                               | NC                       | ② |                          | BES M08MI-POC20B-S49G    |                       | BES 516-377-G-S49-C  |
| NPN                                           | NO                       | ④ | BES M08MH1-NSC20B-S04G   | BES M08MI-NSC20B-S49G    |                       |                      |
|                                               | NC                       | ⑤ |                          |                          |                       |                      |
| Supply voltage U <sub>B</sub>                 | 12...30 V DC             |   | 12...30 V DC             | 12...30 V DC             | 10...30 V DC          | 10...30 V DC         |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 2.5 V                  |   | ≤ 2.5 V                  | ≤ 2.5 V                  | ≤ 2.5 V               | ≤ 2.5 V              |
| Rated insulation voltage U <sub>i</sub>       | 75 V DC                  |   | 75 V DC                  | 75 V DC                  | 250 V AC              | 250 V AC             |
| Rated operational current I <sub>e</sub>      | 200 mA                   |   | 200 mA                   | 200 mA                   | 200 mA                | 200 mA               |
| No-load supply current I <sub>0</sub> max.    | PNP ≤ 10 mA, NPN ≤ 18 mA |   | PNP ≤ 10 mA, NPN ≤ 18 mA | PNP ≤ 10 mA, NPN ≤ 18 mA | ≤ 9 mA                | ≤ 9 mA               |
| Polarity reversal protected                   | yes                      |   | yes                      | yes                      | yes                   | yes                  |
| Short circuit protected                       | yes                      |   | yes                      | yes                      | yes                   | yes                  |
| Repeat accuracy R                             | ≤ 5 %                    |   | ≤ 5 %                    | ≤ 5 %                    | ≤ 5 %                 | ≤ 5 %                |
| Ambient temperature range T <sub>a</sub>      | -25...+70 °C             |   | -25...+70 °C             | -25...+70 °C             | -25...+70 °C          | -25...+70 °C         |
| Switching frequency f                         | 700 Hz                   |   | 700 Hz                   | 700 Hz                   | 1500 Hz               | 1500 Hz              |
| Utilization category                          | DC 13                    |   | DC 13                    | DC 13                    | DC 13                 | DC 13                |
| Function indicator                            | yes                      |   | yes                      | yes                      | yes                   | yes                  |
| Degree of protection per IEC 60529            | IP 67                    |   | IP 67                    | IP 67                    | IP 68 per BWN Pr. 20  | IP 68 per BWN Pr. 20 |
| Insulation class                              |                          |   |                          |                          | □                     | □                    |
| Housing material                              | CuZn coated              |   | CuZn coated              | CuZn coated              | Stainless steel       | Stainless steel      |
| Material of sensing face                      | PA 12                    |   | PA 12                    | PA 12                    | PBT                   | PBT                  |
| Connection                                    | Connector                |   | Connector                | Connector                | Connector             | Connector            |
| No. of wires × cross-section                  |                          |   |                          |                          |                       |                      |
| Approval                                      | cULus                    |   | cULus                    | cULus                    | cULus                 | cULus                |
| Recommended connector                         | BKS-_ 19/BKS-_ 20        |   | BKS-_ 48/BKS-_ 49        | BKS-_ 48/BKS-_ 49        | BKS-_ 19/BKS-_ 20     | BKS-_ 48/BKS-_ 49    |






① Wiring diagrams see page 1.0.6  
Switching distance ■ ■ see page 1.0.10

For sensors with cable, other lengths and PUR quality are available on request.

For sensors with cable and connector, other lengths are available on request.







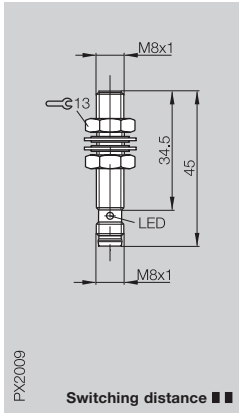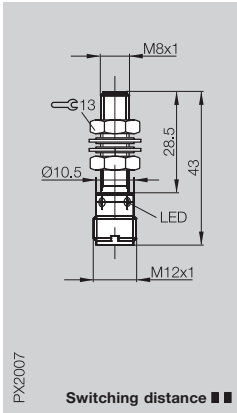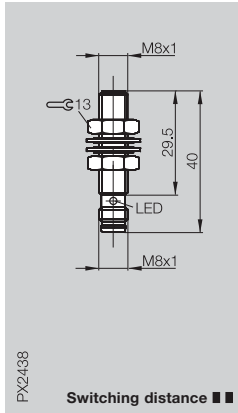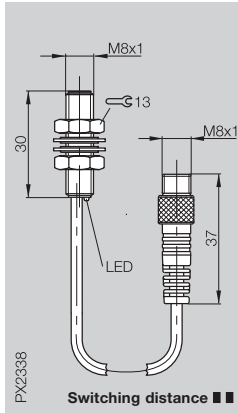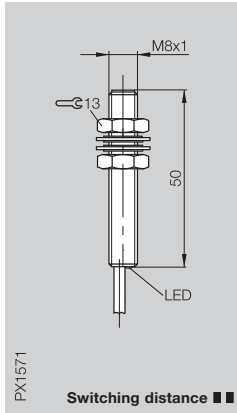

| M8x1<br>flush<br>2 mm<br>0...1.6 mm                                                    | M8x1<br>flush<br>2 mm<br>0...1.6 mm                                               | M8x1<br>flush<br>2 mm<br>0...1.6 mm                                                    | M8x1<br>flush<br>2 mm<br>0...1.6 mm                                                | M8x1<br>flush<br>2 mm<br>0...1.6 mm                                                     |
|----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
|       |  |       |  |      |
| Switching distance ■ ■                                                                 | Switching distance ■ ■                                                            | Switching distance ■ ■                                                                 | Switching distance ■ ■                                                             | Switching distance ■ ■                                                                  |
| BES 516-324-G-E5-C-S49<br>BES 516-377-G-E5-C-S49                                       | BES M08EE-PSC20B-S04G                                                             | BES M08EE-PSC20B-S49G<br>BES M08EE-POC20B-S49G                                         | BES 516-324-G-E4-C-S49-00,2<br>BES 516-377-G-E4-C-S49-00,3                         | BES M08MI-PSC20B-BV02                                                                   |
| BES 516-343-G-E5-C-S49<br>BES 516-378-G-E5-C-S49                                       |                                                                                   | BES M08EE-NSC20B-S49G<br>BES M08EE-NOC20B-S49G                                         |                                                                                    | BES M08MI-NSC20B-BV02                                                                   |
| 10...30 V DC<br>≤ 2.5 V<br>250 V AC<br>200 mA<br>PNP ≤ 9 mA, NPN ≤ 11 mA<br>yes<br>yes | 10...30 V DC<br>≤ 2.5 V<br>250 V AC<br>200 mA<br>≤ 9 mA<br>yes<br>yes             | 10...30 V DC<br>≤ 2.5 V<br>250 V AC<br>200 mA<br>PNP ≤ 9 mA, NPN ≤ 11 mA<br>yes<br>yes | 10...30 V DC<br>≤ 2.5 V<br>250 V AC<br>200 mA<br>≤ 9 mA<br>yes<br>yes              | 12...30 V DC<br>≤ 2.5 V<br>250 V AC<br>200 mA<br>PNP ≤ 10 mA, NPN ≤ 18 mA<br>yes<br>yes |
| ≤ 5 %<br>-25...+70 °C<br>1500 Hz<br>DC 13<br>yes                                       | ≤ 5 %<br>-25...+70 °C<br>1500 Hz<br>DC 13<br>yes                                  | ≤ 5 %<br>-25...+70 °C<br>1500 Hz<br>DC 13<br>yes                                       | ≤ 5 %<br>-25...+70 °C<br>1500 Hz<br>DC 13<br>yes                                   | ≤ 5 %<br>-25...+70 °C<br>700 Hz<br>DC 13<br>yes                                         |
| IP 68 per BWN Pr. 20<br>□                                                              | IP 68 per BWN Pr. 20<br>□                                                         | IP 68 per BWN Pr. 20<br>□                                                              | IP 68 per BWN Pr. 20<br>□                                                          | IP 67                                                                                   |
| Stainless steel<br>PA 12<br>Connector                                                  | Stainless steel<br>PBT<br>Connector                                               | Stainless steel<br>PBT<br>Connector                                                    | Stainless steel<br>PA 12<br>0.2 m/0.3 m PUR cable<br>with connector                | CuZn coated<br>PBT<br>2 m PVC cable                                                     |
| cULus<br>BKS-_ 48/BKS-_ 49                                                             | cULus<br>BKS-_ 19/BKS-_ 20                                                        | cULus<br>BKS-_ 48/BKS-_ 49                                                             | cULus<br>BKS-_ 48                                                                  | 3x0.14 mm <sup>2</sup><br>cULus                                                         |



|                                           |             |             |             |             |
|-------------------------------------------|-------------|-------------|-------------|-------------|
| Housing size                              | <b>M8x1</b> | <b>M8x1</b> | <b>M8x1</b> | <b>M8x1</b> |
| Mounting (see notes starting p. 1.0.11)   | flush       | flush       | quasi flush | quasi flush |
| Rated operating distance s <sub>n</sub>   | <b>2 mm</b> | <b>2 mm</b> | <b>3 mm</b> | <b>3 mm</b> |
| Assured operating distance s <sub>a</sub> | 0...1.6 mm  | 0...1.6 mm  | 0...2.4 mm  | 0...2.4 mm  |

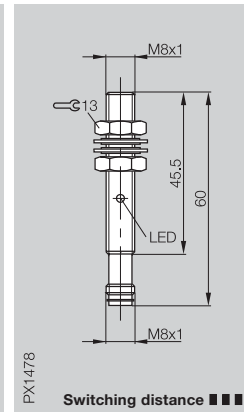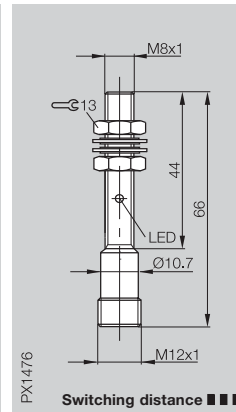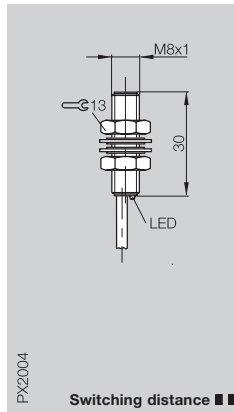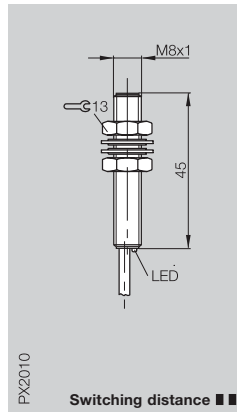

|                                               |                        |   |                         |                        |                        |                        |
|-----------------------------------------------|------------------------|---|-------------------------|------------------------|------------------------|------------------------|
| PNP                                           | NO                     | ① | BES 516-324-G-E0-C-02   | BES 516-324-G-E4-C-02  | BES M08MH1-PSC30B-S04G | BES M08MH1-PSC30B-S49G |
|                                               | NC                     | ② |                         | BES 516-377-G-E4-C-02  |                        |                        |
| NPN                                           | NO                     | ④ |                         | BES 516-343-G-E4-C-02  | BES M08MH1-NSC30B-S04G | BES M08MH1-NSC30B-S49G |
|                                               | NC                     | ⑤ |                         | BES 516-378-G-E4-C-02  |                        |                        |
| Supply voltage U <sub>B</sub>                 | 10...30 V DC           |   | 10...30 V DC            | 10...30 V DC           | 10...30 V DC           | 10...30 V DC           |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 2.5 V                |   | ≤ 2.5 V                 | ≤ 2.5 V                | ≤ 2.5 V                | ≤ 2.5 V                |
| Rated insulation voltage U <sub>i</sub>       | 250 V AC               |   | 250 V AC                | 250 V AC               | 75 V DC                | 75 V DC                |
| Rated operational current I <sub>e</sub>      | 200 mA                 |   | 200 mA                  | 200 mA                 | 200 mA                 | 200 mA                 |
| No-load supply current I <sub>0</sub> max.    | ≤ 9 mA                 |   | PNP ≤ 9 mA, NPN ≤ 11 mA |                        | ≤ 12 mA                | ≤ 12 mA                |
| Polarity reversal protected                   | yes                    |   | yes                     | yes                    | yes                    | yes                    |
| Short circuit protected                       | yes                    |   | yes                     | yes                    | yes                    | yes                    |
| Repeat accuracy R                             | ≤ 5 %                  |   | ≤ 5 %                   | ≤ 5 %                  | ≤ 5 %                  | ≤ 5 %                  |
| Ambient temperature range T <sub>a</sub>      | -25...+70 °C           |   | -25...+70 °C            | -25...+70 °C           | -25...+70 °C           | -25...+70 °C           |
| Switching frequency f                         | 1500 Hz                |   | 1500 Hz                 | 1500 Hz                | 1000 Hz                | 1000 Hz                |
| Utilization category                          | DC 13                  |   | DC 13                   | DC 13                  | DC 13                  | DC 13                  |
| Function indicator                            | yes                    |   | yes                     | yes                    | yes                    | yes                    |
| Degree of protection per IEC 60529            | IP 68 per BWN Pr. 20   |   | IP 68 per BWN Pr. 20    | IP 68 per BWN Pr. 20   | IP 67                  | IP 67                  |
| Insulation class                              | □                      |   | □                       | □                      |                        |                        |
| Housing material                              | Stainless steel        |   | Stainless steel         | Stainless steel        | CuZn coated            | CuZn coated            |
| Material of sensing face                      | PA 12                  |   | PA 12                   | PA 12                  | PBT                    | PBT                    |
| Connection                                    | 2 m PVC cable          |   | 2 m PVC cable           | 2 m PVC cable          | Connector              | Connector              |
| No. of wires × cross-section                  | 3×0.14 mm <sup>2</sup> |   | 3×0.14 mm <sup>2</sup>  | 3×0.14 mm <sup>2</sup> |                        |                        |
| Approval                                      | cULus                  |   | cULus                   | cULus                  |                        |                        |
| Recommended connector                         |                        |   |                         |                        | BKS-_ 19/BKS-_ 20      | BKS-_ 48/BKS-_ 49      |

① Wiring diagrams see page 1.0.6  
Switching distance ■■ see page 1.0.10


For sensors with cable, other lengths and PUR quality are available on request.

For sensors with cable and connector, other lengths are available on request.





| M8×1        | M8×1        | M8×1          | M8×1          | M8×1          |
|-------------|-------------|---------------|---------------|---------------|
| quasi flush | quasi flush | non-flush     | non-flush     | non-flush     |
| <b>4 mm</b> | <b>4 mm</b> | <b>2.5 mm</b> | <b>2.5 mm</b> | <b>2.5 mm</b> |
| 0...2.9 mm  | 0...2.9 mm  | 0...2 mm      | 0...2 mm      | 0...2 mm      |

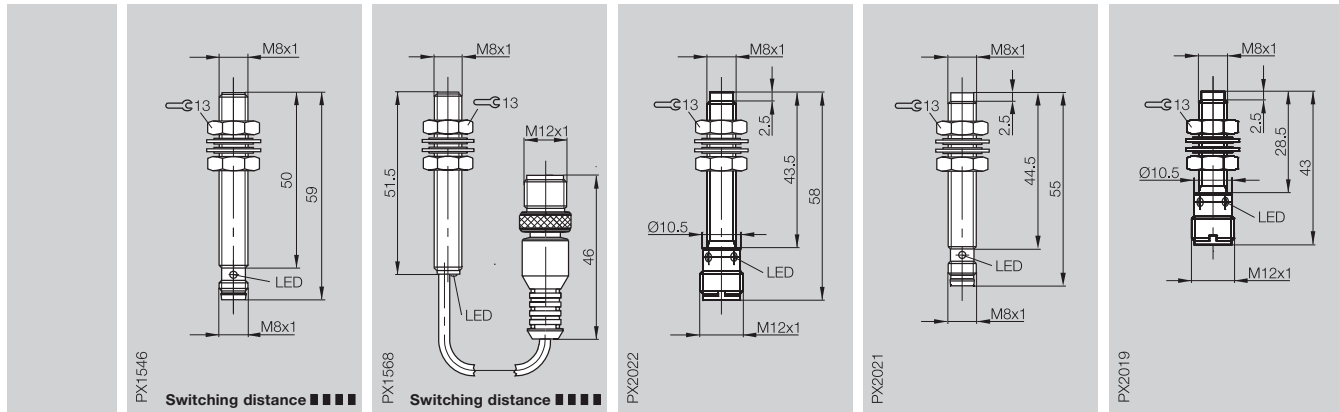

1.1





|                       |                                |                                                |                      |                       |
|-----------------------|--------------------------------|------------------------------------------------|----------------------|-----------------------|
| BES M08MI-PSC40B-S49G | BES M08MI-PSC40B-BP00,2-GS04   | BES M08EG-PSC25F-S04G<br>BES M08EG-POC25F-S04G | BES 516-383-S49-C    | BES M08ED-PSC25F-S04G |
| BES M08MI-NSC40B-S49G | BES M08MI-NSC40B-BP00,2-GS04   | BES M08EG-NSC25F-S04G                          |                      | BES M08ED-NSC25F-S04G |
| 10...30 V DC          | 10...30 V DC                   | 10...30 V DC                                   | 10...30 V DC         | 10...30 V DC          |
| ≤ 2.8 V               | ≤ 2.8 V                        | ≤ 2.5 V                                        | ≤ 2.5 V              | ≤ 2.5 V               |
| 75 V DC               | 75 V DC                        | 250 V AC                                       | 250 V AC             | 250 V AC              |
| 200 mA                | 200 mA                         | 200 mA                                         | 200 mA               | 200 mA                |
| ≤ 10 mA               | ≤ 10 mA                        | PNP ≤ 9 mA, NPN ≤ 18 mA                        | ≤ 9 mA               | ≤ 11 mA               |
| yes                   | yes                            | yes                                            | yes                  | yes                   |
| yes                   | yes                            | yes                                            | yes                  | yes                   |
| ≤ 5 %                 | ≤ 5 %                          | ≤ 5 %                                          | ≤ 5 %                | ≤ 5 %                 |
| 0...+60 °C            | 0...+60 °C                     | -25...+70 °C                                   | -25...+70 °C         | -25...+70 °C          |
| 800 Hz                | 800 Hz                         | 2000 Hz                                        | 2000 Hz              | 2000 Hz               |
| DC 13                 | DC 13                          | DC 13                                          | DC 13                | DC 13                 |
| yes                   | yes                            | yes                                            | yes                  | yes                   |
| IP 67                 | IP 67                          | IP 68 per BWN Pr. 20                           | IP 68 per BWN Pr. 20 | IP 68 per BWN Pr. 20  |
| CuZn coated           | CuZn coated                    | Stainless steel                                | Stainless steel      | Stainless steel       |
| PBT                   | PBT                            | PBT                                            | PA 12                | PBT                   |
| Connector             | 0.2 m PUR cable with connector | Connector                                      | Connector            | Connector             |
| cULus                 | cULus                          | cULus                                          | cULus                | cULus                 |
| BKS-_ 48/BKS-_ 49     | BKS-_ 19                       | BKS-_ 19/BKS-_ 20                              | BKS-_ 48/BKS-_ 49    | BKS-_ 19/BKS-_ 20     |



5

Connectors,  
Holders ...  
Page 5.2 ...

|                                           |               |               |             |             |
|-------------------------------------------|---------------|---------------|-------------|-------------|
| Housing size                              | <b>M8x1</b>   | <b>M8x1</b>   | <b>M8x1</b> | <b>M8x1</b> |
| Mounting (see notes starting p. 1.0.11)   | non-flush     | non-flush     | non-flush   | non-flush   |
| Rated operating distance s <sub>n</sub>   | <b>2.5 mm</b> | <b>2.5 mm</b> | <b>4 mm</b> | <b>4 mm</b> |
| Assured operating distance s <sub>a</sub> | 0...2 mm      | 0...2 mm      | 0...3.2 mm  | 0...3.2 mm  |

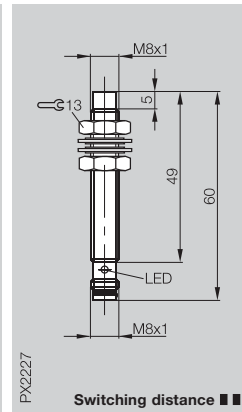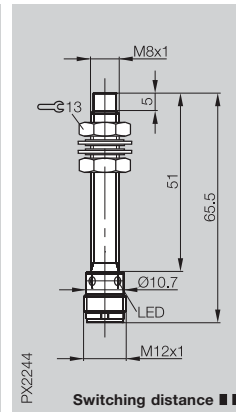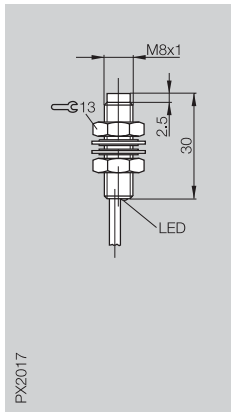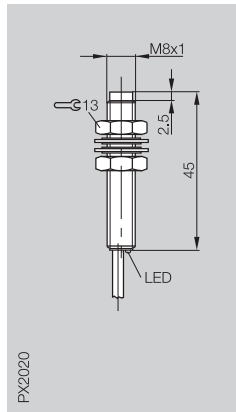


|                                               |                         |   |                         |                         |                       |                       |
|-----------------------------------------------|-------------------------|---|-------------------------|-------------------------|-----------------------|-----------------------|
| PNP                                           | NO                      | ① | BES 516-383-E0-C-02     | BES 516-383-E4-C-02     | BES M08EH-PSC40F-S04G | BES M08EH-PSC40F-S49G |
|                                               | NC                      | ② |                         |                         | BES M08EH-POC40F-S04G | BES M08EH-POC40F-S49G |
| NPN                                           | NO                      | ④ | BES 516-384-E0-C-02     | BES 516-384-E4-C-02     | BES M08EH-NSC40F-S04G | BES M08EH-NSC40F-S49G |
|                                               | NC                      | ⑤ |                         |                         | BES M08EH-NOC40F-S04G | BES M08EH-NOC40F-S49G |
| Supply voltage U <sub>B</sub>                 | 10...30 V DC            |   | 10...30 V DC            | 10...30 V DC            | 10...30 V DC          | 10...30 V DC          |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 2.5 V                 |   | ≤ 2.5 V                 | ≤ 2.5 V                 | ≤ 2.5 V               | ≤ 2.5 V               |
| Rated insulation voltage U <sub>i</sub>       | 250 V AC                |   | 250 V AC                | 250 V AC                | 250 V AC              | 250 V AC              |
| Rated operational current I <sub>e</sub>      | 200 mA                  |   | 200 mA                  | 200 mA                  | 200 mA                | 200 mA                |
| No-load supply current I <sub>0</sub> max.    | PNP ≤ 9 mA, NPN ≤ 18 mA |   | PNP ≤ 9 mA, NPN ≤ 18 mA | PNP ≤ 9 mA, NPN ≤ 18 mA | ≤ 14 mA               | ≤ 14 mA               |
| Polarity reversal protected                   | yes                     |   | yes                     | yes                     | yes                   | yes                   |
| Short circuit protected                       | yes                     |   | yes                     | yes                     | yes                   | yes                   |
| Repeat accuracy R                             | ≤ 5 %                   |   | ≤ 5 %                   | ≤ 5 %                   | ≤ 5 %                 | ≤ 5 %                 |
| Ambient temperature range T <sub>a</sub>      | -25...+70 °C            |   | -25...+70 °C            | -25...+70 °C            | -25...+70 °C          | -25...+70 °C          |
| Switching frequency f                         | 2000 Hz                 |   | 2000 Hz                 | 2000 Hz                 | 1500 Hz               | 1500 Hz               |
| Utilization category                          | DC 13                   |   | DC 13                   | DC 13                   | DC 13                 | DC 13                 |
| Function indicator                            | yes                     |   | yes                     | yes                     | yes                   | yes                   |
| Degree of protection per IEC 60529            | IP 68 per BWN Pr. 20    |   | IP 68 per BWN Pr. 20    | IP 68 per BWN Pr. 20    | IP 67                 | IP 68 per BWN Pr. 20  |
| Insulation class                              | □                       |   | □                       | □                       | □                     | □                     |
| Housing material                              | Stainless steel         |   | Stainless steel         | Stainless steel         | Stainless steel       | Stainless steel       |
| Material of sensing face                      | PA 12                   |   | PA 12                   | PA 12                   | PBT                   | PBT                   |
| Connection                                    | 2 m PVC cable           |   | 2 m PVC cable           | 2 m PVC cable           | Connector             | Connector             |
| No. of wires × cross-section                  | 3×0.14 mm <sup>2</sup>  |   | 3×0.14 mm <sup>2</sup>  | 3×0.14 mm <sup>2</sup>  |                       |                       |
| Approval                                      | cULus                   |   | cULus                   | cULus                   | cULus                 | cULus                 |
| Recommended connector                         |                         |   |                         |                         | BKS- 19/BKS- 20       | BKS- 48/BKS- 49       |

① Wiring diagrams see page 1.0.6  
Switching distance ■■ see page 1.0.10

For sensors with cable, other lengths and PUR quality are available on request.







| M8x1       | M8x1       | M8x1       | M8x1       | M8x1       |
|------------|------------|------------|------------|------------|
| non-flush  | non-flush  | non-flush  | non-flush  | non-flush  |
| 4 mm       | 4 mm       | 4 mm       | 6 mm       | 6 mm       |
| 0...3.2 mm | 0...3.2 mm | 0...3.2 mm | 0...4.9 mm | 0...4.9 mm |

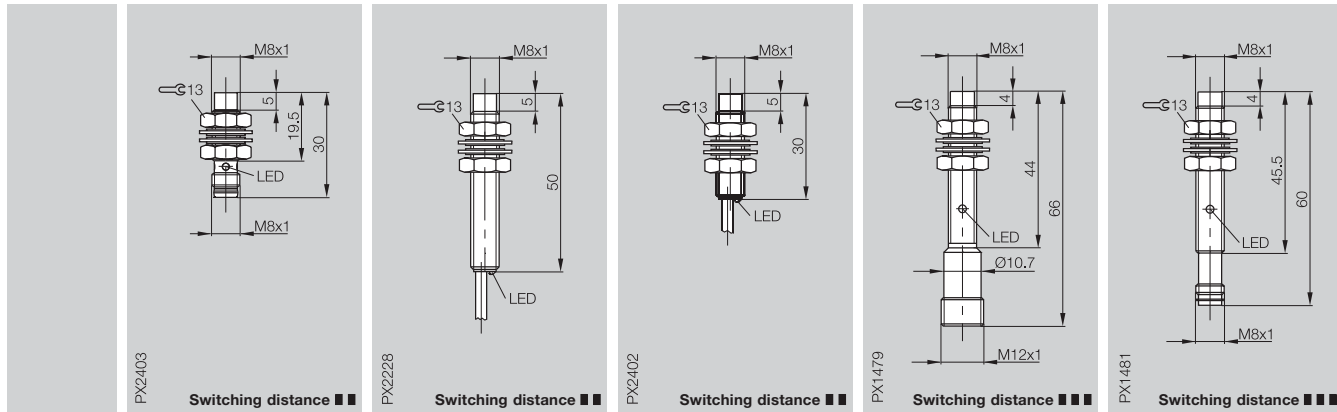

|                                                                        |                                                                            |                                                                              |                                                                       |                                                                       |
|------------------------------------------------------------------------|----------------------------------------------------------------------------|------------------------------------------------------------------------------|-----------------------------------------------------------------------|-----------------------------------------------------------------------|
| BES M08EB-PSC40F-S49G<br>BES M08EB-POC40F-S49G                         | BES M08EG-PSC40F-BV02<br>BES M08EG-POC40F-BV02                             | BES M08ED-PSC40F-BV02<br>BES M08ED-POC40F-BV02                               | BES M08MG1-PSC60F-S04G<br>BES M08MG1-POC60F-S49G                      | BES M08MG1-PSC60F-S49G<br>BES M08MG1-POC60F-S49G                      |
| BES M08EB-NSC40F-S49G<br>BES M08EB-NOC40F-S49G                         | BES M08EG-NSC40F-BV02<br>BES M08EG-NOC40F-BV02                             | BES M08ED-NSC40F-BV02<br>BES M08ED-NOC40F-BV02                               | BES M08MG1-NSC60F-S04G<br>BES M08MG1-POC60F-S49G                      | BES M08MG1-NSC60F-S49G<br>BES M08MG1-NOC60F-S49G                      |
| 10...30 V DC<br>≤ 2.5 V<br>250 V AC<br>200 mA<br>≤ 18 mA<br>yes<br>yes | 10...30 V DC<br>≤ 2.5 V<br>250 V AC<br>200 mA<br>≤ 14 mA<br>yes<br>yes     | 10...30 V DC<br>≤ 2.5 V<br>250 V AC<br>200 mA<br>≤ 18 mA<br>yes<br>yes       | 10...30 V DC<br>≤ 2.5 V<br>75 V DC<br>200 mA<br>≤ 12 mA<br>yes<br>yes | 10...30 V DC<br>≤ 2.5 V<br>75 V DC<br>200 mA<br>≤ 12 mA<br>yes<br>yes |
| ≤ 5 %<br>-25...+70 °C<br>1500 Hz<br>DC 13<br>yes                       | ≤ 5 %<br>-25...+70 °C<br>1500 Hz<br>DC 13<br>yes                           | ≤ 5 %<br>-25...+70 °C<br>1500 Hz<br>DC 13<br>yes                             | ≤ 5 %<br>-25...+70 °C<br>500 Hz<br>DC 13<br>yes                       | ≤ 5 %<br>-25...+70 °C<br>500 Hz<br>DC 13<br>yes                       |
| IP 68 per BWN Pr. 20<br>□                                              | IP 68 per BWN Pr. 20<br>□                                                  | IP 68 per BWN Pr. 20<br>□                                                    | IP 67                                                                 | IP 67                                                                 |
| Stainless steel<br>PBT<br>Connector                                    | Stainless steel<br>PBT<br>2 m PVC cable<br>3x0.14 mm <sup>2</sup><br>cULus | Stainless steel<br>PA 12<br>2 m PVC cable<br>3x0.14 mm <sup>2</sup><br>cULus | CuZn coated<br>PBT<br>Connector                                       | CuZn coated<br>PBT<br>Connector                                       |
| BKS- 48/BKS- 49                                                        |                                                                            |                                                                              | BKS- 19/BKS- 20                                                       | BKS- 48/BKS- 49                                                       |



|                                           |              |              |              |              |
|-------------------------------------------|--------------|--------------|--------------|--------------|
| Housing size                              | <b>M12x1</b> | <b>M12x1</b> | <b>M12x1</b> | <b>M12x1</b> |
| Mounting (see notes starting p. 1.0.11)   | flush        | flush        | flush        | flush        |
| Rated operating distance s <sub>n</sub>   | <b>2 mm</b>  | <b>2 mm</b>  | <b>2 mm</b>  | <b>2 mm</b>  |
| Assured operating distance s <sub>a</sub> | 0...1.6 mm   | 0...1.6 mm   | 0...1.6 mm   | 0...1.6 mm   |

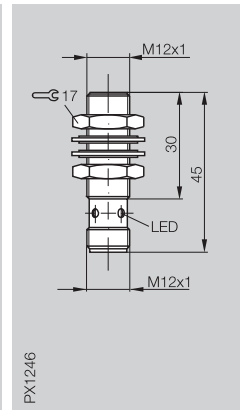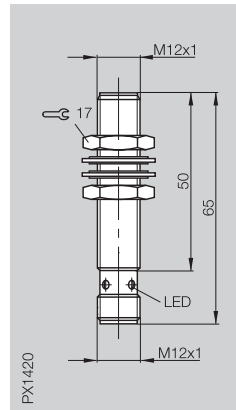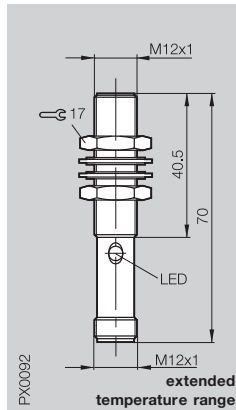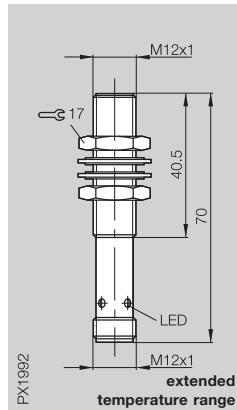

|     |                 |                  |                  |                       |                     |
|-----|-----------------|------------------|------------------|-----------------------|---------------------|
| PNP | NO ①            | BES 516-325-S4-C |                  | BES M12MI-PSC20B-S04G | BES 516-325-E5-C-S4 |
|     | NC ②            |                  | BES 516-370-S4-C | BES M12MI-POC20B-S04G | BES 516-370-E5-C-S4 |
|     | complementary ③ | BES 516-113-S4-C |                  |                       |                     |
| NPN | NO ④            |                  | BES 516-329-S4-C | BES M12MI-NSC20B-S04G | BES 516-329-E5-C-S4 |
|     | NC ⑤            |                  | BES 516-375-S4-C | BES M12MI-NOC20B-S04G | BES 516-375-E5-C-S4 |
|     | complementary ⑥ | BES 516-118-S4-C |                  |                       |                     |

|                                               |                      |                      |                      |                      |
|-----------------------------------------------|----------------------|----------------------|----------------------|----------------------|
| Supply voltage U <sub>B</sub>                 | 10...30 V DC         | 10...30 V DC         | 12...30 V DC         | 10...30 V DC         |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 1.5 V              | ≤ 1.5 V              | ≤ 2.5 V              | ≤ 2 V                |
| Rated insulation voltage U <sub>i</sub>       | 250 V AC             | 250 V AC             | 250 V AC             | 250 V AC             |
| Rated operational current I <sub>e</sub>      | 200 mA               | 200 mA               | 200 mA               | 200 mA               |
| No-load supply current I <sub>0</sub> max.    | ≤ 8 mA               | ≤ 8 mA               | ≤ 15 mA              | ≤ 10 mA              |
| Polarity reversal protected                   | yes                  | yes                  | yes                  | yes                  |
| Short circuit protected                       | yes                  | yes                  | yes                  | yes                  |
| Repeat accuracy R                             | ≤ 5 %                | ≤ 5 %                | ≤ 5 %                | ≤ 5 %                |
| Ambient temperature range T <sub>a</sub>      | -40...+85 °C         | -40...+85 °C         | -25...+70 °C         | -25...+70 °C         |
| Switching frequency f                         | 3000 Hz              | 3000 Hz              | 1200 Hz              | 5000 Hz              |
| Utilization category                          | DC 13                | DC 13                | DC 13                | DC 13                |
| Function indicator                            | yes                  | yes                  | yes                  | yes                  |
| Degree of protection per IEC 60529            | IP 68 per BWN Pr. 20 | IP 68 per BWN Pr. 20 | IP 68 per BWN Pr. 20 | IP 68 per BWN Pr. 20 |
| Insulation class                              | □                    | □                    | □                    | □                    |
| Housing material                              | Stainless steel      | Stainless steel      | CuZn coated          | CuZn coated          |
| Material of sensing face                      | PA 12                | PA 12                | PA 12                | PBT                  |
| Connection                                    | Connector            | Connector            | Connector            | Connector            |
| No. of wires × cross-section                  |                      |                      |                      |                      |
| Approval                                      | cULus                | cULus                | cULus                | cULus                |
| Recommended connector                         | BKS- _ 19/BKS- _ 20  | BKS- _ 19/BKS- _ 20  | BKS- _ 19/BKS- _ 20  | BKS- _ 19/BKS- _ 20  |

① Wiring diagrams see page 1.0.6

For sensors with cable, other lengths and PUR quality are available on request.





For sensors with cable and connector, other lengths are available on request.



|  | M12x1<br>flush<br>2 mm<br>0...1.6 mm                                  | M12x1<br>flush<br>2 mm<br>0...1.6 mm                                  | M12x1<br>flush<br>2 mm<br>0...1.6 mm                                 | M12x1<br>flush<br>2 mm<br>0...1.6 mm                                  | M12x1<br>flush<br>2 mm<br>0...1.6 mm                                   |
|--|-----------------------------------------------------------------------|-----------------------------------------------------------------------|----------------------------------------------------------------------|-----------------------------------------------------------------------|------------------------------------------------------------------------|
|  |                                                                       |                                                                       |                                                                      |                                                                       |                                                                        |
|  | BES 516-325-E5-Y-S49                                                  | BES 516-325-SA45                                                      | BES 516-325-E4-C-S4-00.5                                             | BES 516-325-B0-C-02<br>BES 516-370-B0-C-02                            | BES 516-113-B0-C-03                                                    |
|  |                                                                       |                                                                       |                                                                      | BES 516-329-B0-C-02<br>BES 516-375-B0-C-02                            | BES 516-118-B0-C-03                                                    |
|  | 10...30 V DC<br>≤ 3.5 V<br>75 V DC<br>130 mA<br>≤ 25 mA<br>yes<br>yes | 10...30 V DC<br>≤ 2.5 V<br>75 V DC<br>200 mA<br>≤ 20 mA<br>yes<br>yes | 10...30 V DC<br>≤ 2 V<br>250 V AC<br>200 mA<br>≤ 10 mA<br>yes<br>yes | 10...30 V DC<br>≤ 1.5 V<br>250 V AC<br>200 mA<br>≤ 8 mA<br>yes<br>yes | 10...30 V DC<br>≤ 2.5 V<br>250 V AC<br>200 mA<br>≤ 32 mA<br>yes<br>yes |
|  | ≤ 5 %<br>-25...+70 °C<br>1000 Hz<br>DC 13<br>yes                      | ≤ 5 %<br>-25...+70 °C<br>1000 Hz<br>DC 13<br>no                       | ≤ 5 %<br>-25...+70 °C<br>5000 Hz<br>DC 13<br>yes                     | ≤ 5 %<br>-25...+70 °C<br>3000 Hz<br>DC 13<br>yes                      | ≤ 5 %<br>-25...+70 °C<br>800 Hz<br>DC 13<br>yes                        |
|  | IP 67                                                                 | IP 67                                                                 | IP 68 per BWN Pr. 20<br>□                                            | IP 68 per BWN Pr. 20<br>□                                             | IP 68 per BWN Pr. 20<br>□                                              |
|  | CuZn coated<br>PA 12<br>Connector                                     | CuZn coated<br>PA 12<br>Connector                                     | CuZn coated<br>PBT<br>0.5 m PUR cable with<br>connector              | Stainless steel<br>PA 12<br>2 m PVC cable                             | Stainless steel<br>PA 12<br>3 m PVC cable                              |
|  | cULus<br>BKS- _ 48/BKS- _ 49                                          | cULus<br>BKS- _ 19/BKS- _ 20                                          | cULus<br>BKS- _ 19                                                   | 3x0.34 mm <sup>2</sup><br>cULus                                       | 4x0.25 mm <sup>2</sup><br>cULus                                        |



|                                           |              |              |              |              |  |
|-------------------------------------------|--------------|--------------|--------------|--------------|--|
| Housing size                              | <b>M12x1</b> | <b>M12x1</b> | <b>M12x1</b> | <b>M12x1</b> |  |
| Mounting (see notes starting p. 1.0.11)   | flush        | flush        | flush        | flush        |  |
| Rated operating distance s <sub>n</sub>   | <b>2 mm</b>  | <b>2 mm</b>  | <b>2 mm</b>  | <b>4 mm</b>  |  |
| Assured operating distance s <sub>a</sub> | 0...1.6 mm   | 0...1.6 mm   | 0...1.6 mm   | 0...3.2 mm   |  |

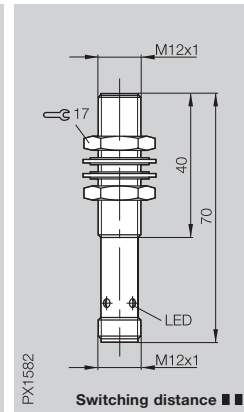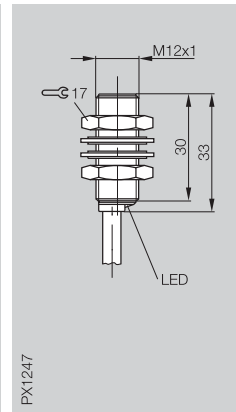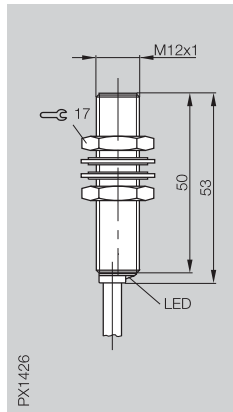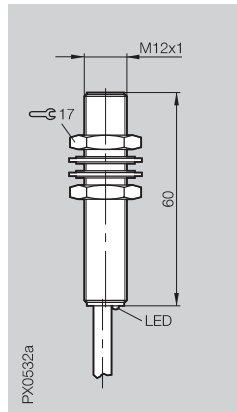

|                                               |                        |   |                        |                       |                        |                    |                   |
|-----------------------------------------------|------------------------|---|------------------------|-----------------------|------------------------|--------------------|-------------------|
| PNP                                           | NO                     | ① | BES 516-325-SA56-03    | BES M12MI-PSC20B-BV02 | BES 516-325-E4-C-02    | BES 516-325-G-S4-C |                   |
|                                               | NC                     | ② |                        | BES M12MI-POC20B-BV02 | BES 516-370-E4-C-02    |                    |                   |
| NPN                                           | NO                     | ④ |                        | BES M12MI-NSC20B-BV02 | BES 516-329-E4-C-02    |                    |                   |
|                                               | NC                     | ⑤ |                        |                       | BES 516-375-E4-C-02    |                    |                   |
| Supply voltage U <sub>B</sub>                 | 10...30 V DC           |   | 12...30 V DC           |                       | 10...30 V DC           |                    | 10...30 V DC      |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 1.7 V                |   | ≤ 2.5 V                |                       | ≤ 2 V                  |                    | ≤ 2.5 V           |
| Rated insulation voltage U <sub>i</sub>       | 75 V DC                |   | 250 V AC               |                       | 250 V AC               |                    | 75 V DC           |
| Rated operational current I <sub>e</sub>      | 200 mA                 |   | 200 mA                 |                       | 200 mA                 |                    | 200 mA            |
| No-load supply current I <sub>0</sub> max.    | ≤ 25 mA                |   | ≤ 15 mA                |                       | ≤ 12 mA                |                    | ≤ 25 mA           |
| Polarity reversal protected                   | yes                    |   | yes                    |                       | yes                    |                    | yes               |
| Short circuit protected                       | yes                    |   | yes                    |                       | yes                    |                    | yes               |
| Repeat accuracy R                             | ≤ 5 %                  |   | ≤ 5 %                  |                       | ≤ 5 %                  |                    | ≤ 5 %             |
| Ambient temperature range T <sub>a</sub>      | -25...+70 °C           |   | -25...+70 °C           |                       | -25...+70 °C           |                    | -25...+70 °C      |
| Switching frequency f                         | 800 Hz                 |   | 1200 Hz                |                       | 5000 Hz                |                    | 1000 Hz           |
| Utilization category                          | DC 13                  |   | DC 13                  |                       | DC 13                  |                    | DC 13             |
| Function indicator                            | yes                    |   | yes                    |                       | yes                    |                    | yes               |
| Degree of protection per IEC 60529            | IP 67                  |   | IP 68 per BWN Pr. 20   |                       | IP 68 per BWN Pr. 20   |                    | IP 67             |
| Insulation class                              |                        |   | □                      |                       | □                      |                    |                   |
| Housing material                              | Stainless steel        |   | CuZn coated            |                       | CuZn coated            |                    | CuZn coated       |
| Material of sensing face                      | PA 12                  |   | PA 12                  |                       | PBT                    |                    | LCP               |
| Connection                                    | 3 m PVC cable          |   | 2 m PVC cable          |                       | 2 m PVC cable          |                    | Connector         |
| No. of wires × cross-section                  | 3×0.34 mm <sup>2</sup> |   | 3×0.34 mm <sup>2</sup> |                       | 3×0.34 mm <sup>2</sup> |                    |                   |
| Approval                                      |                        |   | cULus                  |                       | cULus                  |                    | cULus             |
| Recommended connector                         |                        |   |                        |                       |                        |                    | BKS-_ 19/BKS-_ 20 |

① Wiring diagrams see page 1.0.6  
Switching distance ■ ■ see page 1.0.10





For sensors with cable, other lengths and PUR quality are available on request.

For sensors with cable and connector, other lengths are available on request.





|                                           |              |              |              |              |  |
|-------------------------------------------|--------------|--------------|--------------|--------------|--|
| Housing size                              | <b>M12x1</b> | <b>M12x1</b> | <b>M12x1</b> | <b>M12x1</b> |  |
| Mounting (see notes starting p. 1.0.11)   | flush        | flush        | flush        | flush        |  |
| Rated operating distance s <sub>n</sub>   | <b>2 mm</b>  | <b>2 mm</b>  | <b>2 mm</b>  | <b>4 mm</b>  |  |
| Assured operating distance s <sub>a</sub> | 0...1.6 mm   | 0...1.6 mm   | 0...1.6 mm   | 0...3.2 mm   |  |

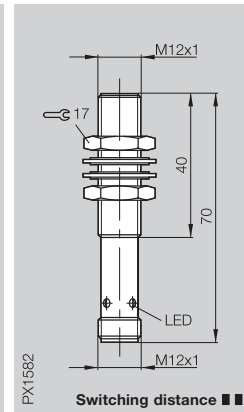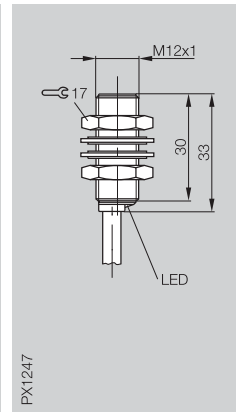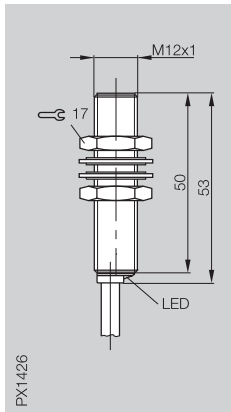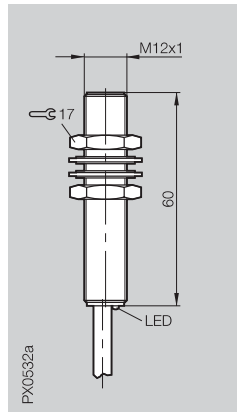

|                                               |                        |   |                        |                       |                        |                    |
|-----------------------------------------------|------------------------|---|------------------------|-----------------------|------------------------|--------------------|
| PNP                                           | NO                     | ① | BES 516-325-SA56-03    | BES M12MI-PSC20B-BV02 | BES 516-325-E4-C-02    | BES 516-325-G-S4-C |
|                                               | NC                     | ② |                        | BES M12MI-POC20B-BV02 | BES 516-370-E4-C-02    |                    |
| NPN                                           | NO                     | ④ |                        | BES M12MI-NSC20B-BV02 | BES 516-329-E4-C-02    |                    |
|                                               | NC                     | ⑤ |                        |                       | BES 516-375-E4-C-02    |                    |
| Supply voltage U <sub>B</sub>                 | 10...30 V DC           |   | 12...30 V DC           |                       | 10...30 V DC           |                    |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 1.7 V                |   | ≤ 2.5 V                |                       | ≤ 2 V                  |                    |
| Rated insulation voltage U <sub>i</sub>       | 75 V DC                |   | 250 V AC               |                       | 250 V AC               |                    |
| Rated operational current I <sub>e</sub>      | 200 mA                 |   | 200 mA                 |                       | 200 mA                 |                    |
| No-load supply current I <sub>0</sub> max.    | ≤ 25 mA                |   | ≤ 15 mA                |                       | ≤ 12 mA                |                    |
| Polarity reversal protected                   | yes                    |   | yes                    |                       | yes                    |                    |
| Short circuit protected                       | yes                    |   | yes                    |                       | yes                    |                    |
| Repeat accuracy R                             | ≤ 5 %                  |   | ≤ 5 %                  |                       | ≤ 5 %                  |                    |
| Ambient temperature range T <sub>a</sub>      | -25...+70 °C           |   | -25...+70 °C           |                       | -25...+70 °C           |                    |
| Switching frequency f                         | 800 Hz                 |   | 1200 Hz                |                       | 5000 Hz                |                    |
| Utilization category                          | DC 13                  |   | DC 13                  |                       | DC 13                  |                    |
| Function indicator                            | yes                    |   | yes                    |                       | yes                    |                    |
| Degree of protection per IEC 60529            | IP 67                  |   | IP 68 per BWN Pr. 20   |                       | IP 68 per BWN Pr. 20   |                    |
| Insulation class                              |                        |   | □                      |                       | □                      |                    |
| Housing material                              | Stainless steel        |   | CuZn coated            |                       | CuZn coated            |                    |
| Material of sensing face                      | PA 12                  |   | PA 12                  |                       | PBT                    |                    |
| Connection                                    | 3 m PVC cable          |   | 2 m PVC cable          |                       | 2 m PVC cable          |                    |
|                                               |                        |   |                        |                       | Connector              |                    |
| No. of wires × cross-section                  | 3×0.34 mm <sup>2</sup> |   | 3×0.34 mm <sup>2</sup> |                       | 3×0.34 mm <sup>2</sup> |                    |
| Approval                                      |                        |   | cULus                  |                       | cULus                  |                    |
| Recommended connector                         |                        |   |                        |                       | BKS-_ 19/BKS-_ 20      |                    |


① Wiring diagrams see page 1.0.6  
Switching distance ■■ see page 1.0.10

For sensors with cable, other lengths and PUR quality are available on request.

For sensors with cable and connector, other lengths are available on request.



| M12x1      | M12x1      | M12x1      | M12x1      | M12x1      |
|------------|------------|------------|------------|------------|
| flush      | flush      | flush      | flush      | flush      |
| 4 mm       | 4 mm       | 4 mm       | 4 mm       | 4 mm       |
| 0...3.2 mm | 0...3.2 mm | 0...3.2 mm | 0...3.2 mm | 0...3.2 mm |

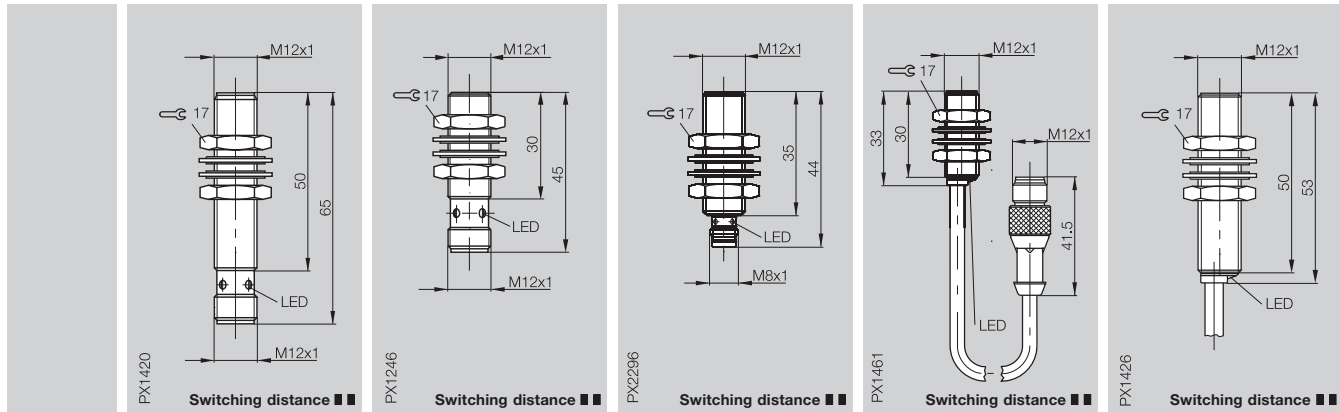

1.1

|                                                |                                                |                                                  |                                   |                                                |
|------------------------------------------------|------------------------------------------------|--------------------------------------------------|-----------------------------------|------------------------------------------------|
| BES M12MI-PSC40B-S04G<br>BES M12MI-POC40B-S04G | BES 516-325-G-E5-C-S4<br>BES 516-370-G-E5-C-S4 | BES 516-325-G-E5-C-S49<br>BES 516-370-G-E5-C-S49 | BES 516-325-G-E4-C-S4-00,5        | BES M12MI-PSC40B-BV02<br>BES M12MI-POC40B-BV02 |
| BES M12MI-NSC40B-S04G<br>BES M12MI-NOC40B-S04G | BES 516-329-G-E5-C-S4<br>BES 516-375-G-E5-C-S4 | BES 516-329-G-E5-C-S49<br>BES 516-375-G-E5-C-S49 |                                   | BES M12MI-NSC40B-BV02                          |
| 12...30 V DC                                   | 10...30 V DC                                   | 10...30 V DC                                     | 10...30 V DC                      | 12...30 V DC                                   |
| ≤ 2.5 V                                        | ≤ 2.5 V                                        | ≤ 2.5 V                                          | ≤ 2.5 V                           | ≤ 2.5 V                                        |
| 250 V AC                                       | 250 V AC                                       | 75 V DC                                          | 250 V AC                          | 250 V AC                                       |
| 200 mA                                         | 200 mA                                         | 200 mA                                           | 200 mA                            | 200 mA                                         |
| ≤ 15 mA                                        | ≤ 14 mA                                        | ≤ 14 mA                                          | ≤ 10 mA                           | ≤ 15 mA                                        |
| yes                                            | yes                                            | yes                                              | yes                               | yes                                            |
| yes                                            | yes                                            | yes                                              | yes                               | yes                                            |
| ≤ 5 %                                          | ≤ 5 %                                          | ≤ 5 %                                            | ≤ 5 %                             | ≤ 5 %                                          |
| -25...+70 °C                                   | -25...+70 °C                                   | -25...+70 °C                                     | -25...+70 °C                      | -25...+70 °C                                   |
| 300 Hz                                         | 1000 Hz                                        | 1000 Hz                                          | 2500 Hz                           | 300 Hz                                         |
| DC 13                                          | DC 13                                          | DC 13                                            | DC 13                             | DC 13                                          |
| yes                                            | yes                                            | yes                                              | yes                               | yes                                            |
| IP 68 per BWN Pr. 20<br>☐                      | IP 68 per BWN Pr. 20<br>☐                      | IP 67                                            | IP 68 per BWN Pr. 20<br>☐         | IP 68 per BWN Pr. 20<br>☐                      |
| CuZn coated                                    | CuZn coated                                    | CuZn coated                                      | CuZn coated                       | CuZn coated                                    |
| LCP                                            | LCP                                            | LCP                                              | LCP                               | LCP                                            |
| Connector                                      | Connector                                      | Connector                                        | 0.5 m PUR cable with<br>connector | 2 m PVC cable                                  |
| cULus                                          | cULus                                          | cULus                                            | cULus                             | 3x0.34 mm <sup>2</sup><br>cULus                |
| BKS-_ 19/BKS-_ 20                              | BKS-_ 19/BKS-_ 20                              | BKS-_ 48/BKS-_ 49                                | BKS-_ 19                          |                                                |







5

Connectors,  
Holders ...  
Page 5.2 ...



|                                           |              |              |              |              |
|-------------------------------------------|--------------|--------------|--------------|--------------|
| Housing size                              | <b>M12x1</b> | <b>M12x1</b> | <b>M12x1</b> | <b>M12x1</b> |
| Mounting (see notes starting p. 1.0.11)   | flush        | quasi flush  | quasi flush  | quasi flush  |
| Rated operating distance s <sub>n</sub>   | <b>4 mm</b>  | <b>6 mm</b>  | <b>6 mm</b>  | <b>8 mm</b>  |
| Assured operating distance s <sub>a</sub> | 0...3.2 mm   | 0...4.9 mm   | 0...4.9 mm   | 0...5.8 mm   |

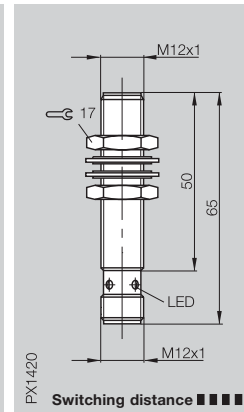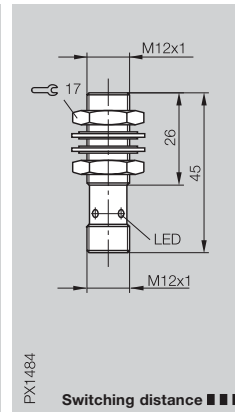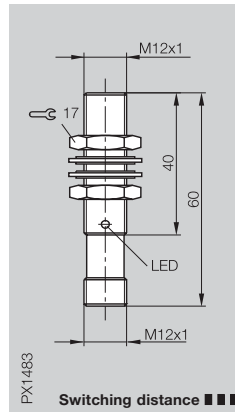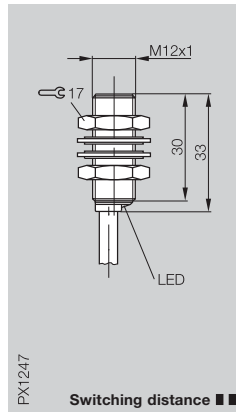






|                                               |                        |                       |                        |                        |                       |
|-----------------------------------------------|------------------------|-----------------------|------------------------|------------------------|-----------------------|
| PNP                                           | NO ①                   | BES 516-325-G-E4-C-02 | BES M12MG1-PSC60B-S04G | BES M12MD1-PSC60B-S04G | BES M12MI-PSH80B-S04G |
|                                               | NC ②                   | BES 516-370-G-E4-C-02 | BES M12MG1-POC60B-S04G |                        |                       |
|                                               | complementary ③        |                       |                        |                        |                       |
| NPN                                           | NO ④                   | BES 516-329-G-E4-C-02 | BES M12MG1-NSC60B-S04G | BES M12MD1-NSC60B-S04G | BES M12MI-NSH80B-S04G |
|                                               | NC ⑤                   | BES 516-375-G-E4-C-02 | BES M12MG1-NOC60B-S04G |                        |                       |
|                                               | complementary ⑥        |                       |                        |                        |                       |
| Supply voltage U <sub>B</sub>                 | 10...30 V DC           | 10...30 V DC          | 10...30 V DC           | 10...30 V DC           | 10...55 V DC          |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 2.5 V                | ≤ 2 V                 | ≤ 2 V                  | ≤ 2 V                  | ≤ 2.5 V               |
| Rated insulation voltage U <sub>i</sub>       | 250 V AC               | 75 V DC               | 75 V DC                | 75 V DC                | 250 V AC              |
| Rated operational current I <sub>e</sub>      | 200 mA                 | 200 mA                | 200 mA                 | 200 mA                 | 200 mA                |
| No-load supply current I <sub>0</sub> max.    | ≤ 14 mA                | ≤ 10 mA               | ≤ 10 mA                | ≤ 10 mA                | ≤ 10 mA               |
| Polarity reversal protected                   | yes                    | yes                   | yes                    | yes                    | yes                   |
| Short circuit protected                       | yes                    | yes                   | yes                    | yes                    | yes                   |
| Repeat accuracy R                             | ≤ 5 %                  | ≤ 5 %                 | ≤ 5 %                  | ≤ 5 %                  | ≤ 10 %                |
| Ambient temperature range T <sub>a</sub>      | -25...+70 °C           | -25...+70 °C          | -25...+70 °C           | -25...+70 °C           | 0...+60 °C            |
| Switching frequency f                         | 1000 Hz                | 800 Hz                | 800 Hz                 | 800 Hz                 | 300 Hz                |
| Utilization category                          | DC 13                  | DC 13                 | DC 13                  | DC 13                  | DC 13                 |
| Function indicator                            | yes                    | yes                   | yes                    | yes                    | yes                   |
| Degree of protection per IEC 60529            | IP 68 per BWN Pr. 20   | IP 67                 | IP 67                  | IP 67                  | IP 67                 |
| Insulation class                              | □                      |                       |                        |                        | □                     |
| Housing material                              | CuZn coated            | CuZn coated           | CuZn coated            | CuZn coated            | CuZn coated           |
| Material of sensing face                      | LCP                    | PBT                   | PBT                    | PBT                    | LCP                   |
| Connection                                    | 2 m PVC cable          | Connector             | Connector              | Connector              | Connector             |
| No. of wires × cross-section                  | 3×0.34 mm <sup>2</sup> |                       |                        |                        |                       |
| Approval                                      | cULus                  |                       |                        |                        |                       |
| Recommended connector                         |                        | BKS- _ 19/BKS- _ 20   | BKS- _ 19/BKS- _ 20    | BKS- _ 19/BKS- _ 20    | BKS- _ 19/BKS- _ 20   |

① Wiring diagrams see page 1.0.6  
Switching distance ■■ see page 1.0.10

For sensors with cable, other lengths and PUR quality are available on request.


For sensors with cable and connector, other lengths are available on request.

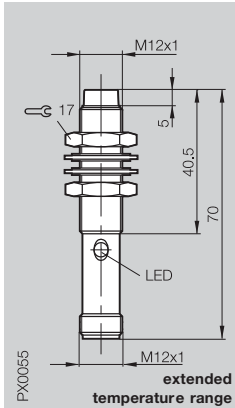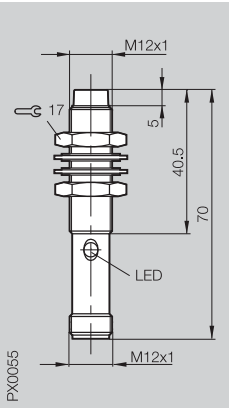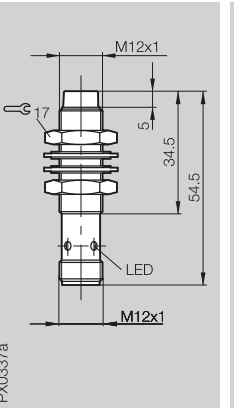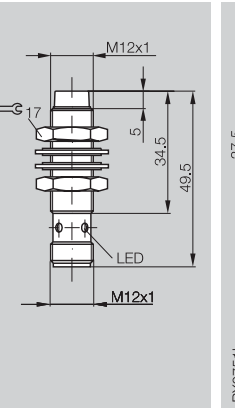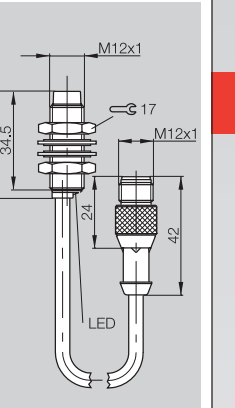





| M12x1<br>non-flush<br>4 mm<br>0...3.2 mm                                          | M12x1<br>non-flush<br>4 mm<br>0...3.2 mm                                          | M12x1<br>non-flush<br>4 mm<br>0...3.2 mm                                          | M12x1<br>non-flush<br>4 mm<br>0...3.2 mm                                           | M12x1<br>non-flush<br>4 mm<br>0...3.2 mm                                             |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |  |  |   |
| BES 516-356-S4-C<br>BES 516-3019-S4-C                                             | BES 516-131-S4-C                                                                  |                                                                                   | BES 516-356-E5-C-S4<br>BES 516-3019-E5-C-S4                                        | BES 516-356-E4-C-S4-00,3                                                             |
| BES 516-357-S4-C<br>BES 516-3030-S4-C                                             | BES 516-122-S4-C                                                                  | BES 516-357-E5-Y-S4                                                               |                                                                                    |                                                                                      |
| 10...30 V DC<br>≤ 1.5 V<br>250 V AC<br>200 mA<br>≤ 8 mA<br>yes<br>yes             | 10...30 V DC<br>≤ 2.5 V<br>250 V AC<br>200 mA<br>≤ 32 mA<br>yes<br>yes            | 10...30 V DC<br>≤ 3.5 V<br>75 V DC<br>130 mA<br>≤ 25 mA<br>yes<br>yes             | 10...30 V DC<br>≤ 2 V<br>250 V AC<br>200 mA<br>≤ 10 mA<br>yes<br>yes               | 10...30 V DC<br>≤ 2 V<br>250 V AC<br>200 mA<br>≤ 10 mA<br>yes<br>yes                 |
| ≤ 5 %<br>-40...+85 °C<br>1500 Hz<br>DC 13<br>yes                                  | ≤ 5 %<br>-25...+70 °C<br>400 Hz<br>DC 13<br>yes                                   | ≤ 5 %<br>-25...+70 °C<br>400 Hz<br>DC 13<br>yes                                   | ≤ 5 %<br>-25...+70 °C<br>2000 Hz<br>DC 13<br>yes                                   | ≤ 5 %<br>-25...+70 °C<br>2000 Hz<br>DC 13<br>yes                                     |
| IP 68 per BWN Pr. 20<br>☐<br>Stainless steel<br>PA 12<br>Connector                | IP 68 per BWN Pr. 20<br>☐<br>Stainless steel<br>PA 12<br>Connector                | IP 68 per BWN Pr. 20<br>☐<br>CuZn coated<br>PA 12<br>Connector                    | IP 68 per BWN Pr. 20<br>☐<br>CuZn coated<br>PBT<br>Connector                       | IP 68 per BWN Pr. 20<br>☐<br>CuZn coated<br>PBT<br>0.3 m PUR cable with<br>connector |
| cULus<br>BKS- _ 19/BKS- _ 20                                                      | cULus<br>BKS- _ 19/BKS- _ 20                                                      | cULus<br>BKS- _ 19/BKS- _ 20                                                      | cULus<br>BKS- _ 19/BKS- _ 20                                                       | cULus<br>BKS- _ 19                                                                   |

1.1

5

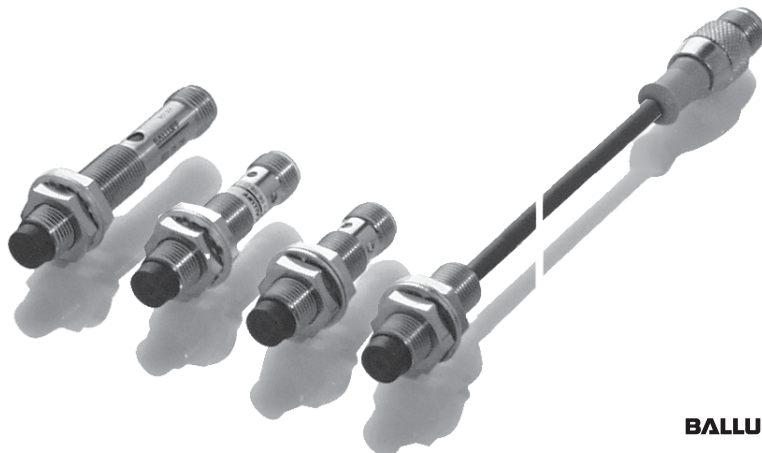Connectors,  
Holders ...  
Page 5.2 ...

|                                           |              |              |              |              |  |
|-------------------------------------------|--------------|--------------|--------------|--------------|--|
| Housing size                              | <b>M12x1</b> | <b>M12x1</b> | <b>M12x1</b> | <b>M12x1</b> |  |
| Mounting (see notes starting p. 1.0.11)   | non-flush    | non-flush    | non-flush    | non-flush    |  |
| Rated operating distance s <sub>n</sub>   | <b>4 mm</b>  | <b>4 mm</b>  | <b>4 mm</b>  | <b>4 mm</b>  |  |
| Assured operating distance s <sub>a</sub> | 0...3.2 mm   | 0...3.2 mm   | 0...3.2 mm   | 0...3.2 mm   |  |

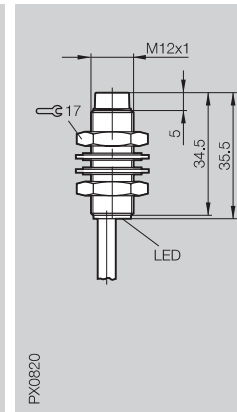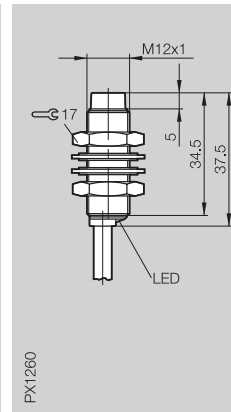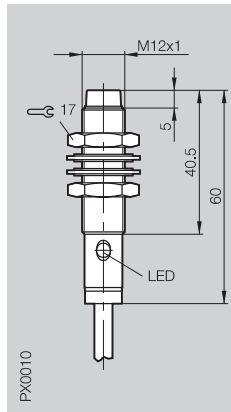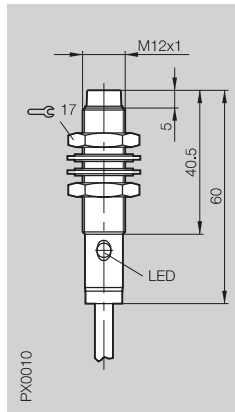

|     |                 |                      |                     |                      |                     |
|-----|-----------------|----------------------|---------------------|----------------------|---------------------|
| PNP | NO ①            | BES 516-356-B0-C-02  |                     | BES 516-356-E4-C-02  |                     |
|     | NC ②            | BES 516-3019-B0-C-02 |                     | BES 516-3019-E4-C-02 |                     |
|     | complementary ③ |                      | BES 516-131-B0-C-03 |                      |                     |
| NPN | NO ④            | BES 516-357-B0-C-02  |                     |                      | BES 516-357-E4-Y-02 |
|     | NC ⑤            | BES 516-3030-B0-C-02 |                     | BES 516-3030-E4-C-02 |                     |
|     | complementary ⑥ |                      | BES 516-122-B0-C-03 |                      |                     |

|                                               |                        |                        |                        |                        |  |
|-----------------------------------------------|------------------------|------------------------|------------------------|------------------------|--|
| Supply voltage U <sub>B</sub>                 | 10...30 V DC           | 10...30 V DC           | 10...30 V DC           | 10...30 V DC           |  |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 1.5 V                | ≤ 2.5 V                | ≤ 2 V                  | ≤ 3.5 V                |  |
| Rated insulation voltage U <sub>i</sub>       | 250 V AC               | 250 V AC               | 250 V AC               | 75 V DC                |  |
| Rated operational current I <sub>e</sub>      | 200 mA                 | 200 mA                 | 200 mA                 | 130 mA                 |  |
| No-load supply current I <sub>0</sub> max.    | ≤ 8 mA                 | ≤ 32 mA                | ≤ 10 mA                | ≤ 25 mA                |  |
| Polarity reversal protected                   | yes                    | yes                    | yes                    | yes                    |  |
| Short circuit protected                       | yes                    | yes                    | yes                    | yes                    |  |
| Repeat accuracy R                             | ≤ 5 %                  | ≤ 5 %                  | ≤ 5 %                  | ≤ 5 %                  |  |
| Ambient temperature range T <sub>a</sub>      | -25...+70 °C           | -25...+70 °C           | -25...+70 °C           | -25...+70 °C           |  |
| Switching frequency f                         | 1500 Hz                | 400 Hz                 | 2000 Hz                | 400 Hz                 |  |
| Utilization category                          | DC 13                  | DC 13                  | DC 13                  | DC 13                  |  |
| Function indicator                            | yes                    | yes                    | yes                    | yes                    |  |
| Degree of protection per IEC 60529            | IP 68 per BWN Pr. 20   | IP 68 per BWN Pr. 20   | IP 68 per BWN Pr. 20   | IP 68 per BWN Pr. 20   |  |
| Insulation class                              | □                      | □                      | □                      |                        |  |
| Housing material                              | Stainless steel        | Stainless steel        | CuZn coated            | CuZn coated            |  |
| Material of sensing face                      | PA 12                  | PA 12                  | PBT                    | PA 12                  |  |
| Connection                                    | 2 m PVC cable          | 3 m PVC cable          | 2 m PVC cable          | 2 m PVC cable          |  |
| No. of wires × cross-section                  | 3×0.34 mm <sup>2</sup> | 4×0.25 mm <sup>2</sup> | 3×0.34 mm <sup>2</sup> | 3×0.34 mm <sup>2</sup> |  |
| Approval                                      | cULus                  | cULus                  | cULus                  | cULus                  |  |
| Recommended connector                         |                        |                        |                        |                        |  |

① Wiring diagrams see page 1.0.6  
Switching distance ■■ see page 1.0.10

For sensors with cable, other lengths  
quality are available on request.



**M12x1**

non-flush

**8 mm**

0...6.5 mm

**M12x1**

non-flush

**8 mm**




0...6.5 mm

**M12x1**

non-flush

**8 mm**

0...6.5 mm

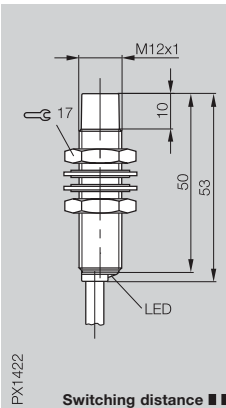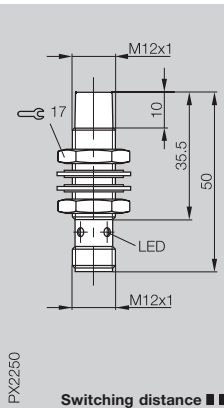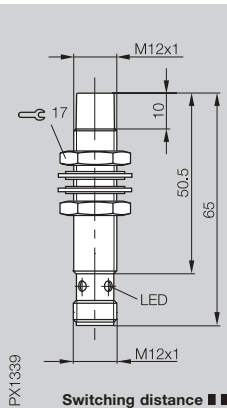BES M12MG-PSC80F-S04G  
BES M12MG-POC80F-S04GBES M12MD-PSC80F-S04G  
BES M12MD-POC80F-S04GBES M12MG-PSC80F-BV02  
BES M12MG-POC80F-BV02BES M12MG-NSC80F-S04G  
BES M12MG-NOC80F-S04GBES M12MD-NSC80F-S04G  
BES M12MD-NOC80F-S04GBES M12MG-NSC80F-BV02  
BES M12MG-NOC80F-BV02

10...30 V DC

≤ 2.5 V

250 V AC

200 mA

≤ 14 mA

yes

yes

≤ 5 %

-25...+70 °C

800 Hz

DC 13

yes

IP 67



CuZn coated

PBT

Connector

cULus

BKS- \_ 19/BKS- \_ 20

10...30 V DC

≤ 2.5 V

250 V AC

200 mA

≤ 14 mA

yes

yes

≤ 5 %

-25...+70 °C

800 Hz

DC 13

yes

IP 67



CuZn coated

PBT

Connector

cULus

BKS- \_ 19/BKS- \_ 20

10...30 V DC

≤ 2.5 V

250 V AC

200 mA

≤ 14 mA

yes

yes

≤ 5 %

-25...+70 °C

800 Hz

DC 13

yes

IP 67



CuZn coated

PBT



2 m PVC cable

3×0.34 mm<sup>2</sup>

cULus

**1.1****5**Connectors,  
Holders ...  
Page 5.2 ...

|                                           |              |              |  |  |  |
|-------------------------------------------|--------------|--------------|--|--|--|
| Housing size                              | <b>M12x1</b> | <b>M12x1</b> |  |  |  |
| Mounting (see notes starting p. 1.0.11)   | non-flush    | non-flush    |  |  |  |
| Rated operating distance s <sub>n</sub>   | <b>10 mm</b> | <b>10 mm</b> |  |  |  |
| Assured operating distance s <sub>a</sub> | 0...8.1 mm   | 0...8.1 mm   |  |  |  |

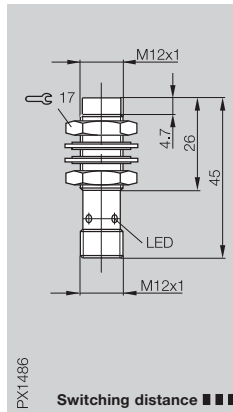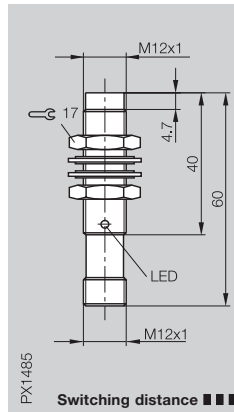

|                                               |                     |                        |                        |  |  |
|-----------------------------------------------|---------------------|------------------------|------------------------|--|--|
| PNP                                           | NO ①                | BES M12MF1-PSC10F-S04G | BES M12MC1-PSC10F-S04G |  |  |
|                                               | NC ②                | BES M12MF1-POC10F-S04G |                        |  |  |
|                                               | complementary ③     |                        |                        |  |  |
| NPN                                           | NO ④                | BES M12MF1-NSC10F-S04G | BES M12MC1-NSC10F-S04G |  |  |
|                                               | NC ⑤                |                        |                        |  |  |
|                                               | complementary ⑥     |                        |                        |  |  |
| Supply voltage U <sub>B</sub>                 | 10...30 V DC        | 10...30 V DC           |                        |  |  |
| Voltage drop U <sub>d</sub> at I <sub>B</sub> | ≤ 2 V               | ≤ 2 V                  |                        |  |  |
| Rated insulation voltage U <sub>i</sub>       | 75 V DC             | 75 V DC                |                        |  |  |
| Rated operational current I <sub>B</sub>      | 200 mA              | 200 mA                 |                        |  |  |
| No-load supply current I <sub>0</sub> max.    | ≤ 10 mA             | ≤ 10 mA                |                        |  |  |
| Polarity reversal protected                   | yes                 | yes                    |                        |  |  |
| Short circuit protected                       | yes                 | yes                    |                        |  |  |
| Repeat accuracy R                             | ≤ 5 %               | ≤ 5 %                  |                        |  |  |
| Ambient temperature range T <sub>a</sub>      | -25...+70 °C        | -25...+70 °C           |                        |  |  |
| Switching frequency f                         | 400 Hz              | 400 Hz                 |                        |  |  |
| Utilization category                          | DC 13               | DC 13                  |                        |  |  |
| Function indicator                            | yes                 | yes                    |                        |  |  |
| Degree of protection per IEC 60529            | IP 67               | IP 67                  |                        |  |  |
| Insulation class                              |                     |                        |                        |  |  |
| Housing material                              | CuZn coated         | CuZn coated            |                        |  |  |
| Material of sensing face                      | PBT                 | PBT                    |                        |  |  |
| Connection                                    | Connector           | Connector              |                        |  |  |
| Approval                                      |                     |                        |                        |  |  |
| Recommended connector                         | BKS- _ 19/BKS- _ 20 | BKS- _ 19/BKS- _ 20    |                        |  |  |

① Wiring diagrams see page 1.0.6  
Switching distance ■■■ see page 1.0.10







| M18x1<br>flush<br>5 mm<br>0...4.1 mm                                  | M18x1<br>flush<br>5 mm<br>0...4.1 mm                                   | M18x1<br>flush<br>5 mm<br>0...4.1 mm                                   | M18x1<br>flush<br>5 mm<br>0...4.1 mm                                   | M18x1<br>flush<br>5 mm<br>0...4.1 mm                                  |
|-----------------------------------------------------------------------|------------------------------------------------------------------------|------------------------------------------------------------------------|------------------------------------------------------------------------|-----------------------------------------------------------------------|
|                                                                       |                                                                        |                                                                        |                                                                        |                                                                       |
| BES 516-326-S4-C<br>BES 516-367-S4-C                                  | BES 516-105-S4-C                                                       | BES M18MI-PSC50B-S04G                                                  | BES M18MI-PSC50B-S04K<br>BES M18MI-POC50B-S04K                         | BES 516-367-E5-Y-S4                                                   |
| BES 516-355-S4-C<br>BES 516-366-S4-C                                  | BES 516-111-S4-C                                                       |                                                                        | BES M18MI-NSC50B-S04K<br>BES M18MI-NOC50B-S04K                         | BES 516-355-E5-Y-S4                                                   |
| 10...30 V DC<br>≤ 1.5 V<br>250 V AC<br>200 mA<br>≤ 8 mA<br>yes<br>yes | 10...30 V DC<br>≤ 2.5 V<br>250 V AC<br>200 mA<br>≤ 30 mA<br>yes<br>yes | 12...30 V DC<br>≤ 2.5 V<br>250 V AC<br>200 mA<br>≤ 15 mA<br>yes<br>yes | 12...30 V DC<br>≤ 2.5 V<br>250 V AC<br>200 mA<br>≤ 15 mA<br>yes<br>yes | 10...30 V DC<br>≤ 3.5 V<br>75 V DC<br>130 mA<br>≤ 25 mA<br>yes<br>yes |
| ≤ 5 %<br>-25...+70 °C<br>900 Hz<br>DC 13<br>yes                       | ≤ 5 %<br>-25...+70 °C<br>500 Hz<br>DC 13<br>yes                        | ≤ 5 %<br>-25...+70 °C<br>700 Hz<br>DC 13<br>yes                        | ≤ 5 %<br>-25...+70 °C<br>700 Hz<br>DC 13<br>yes                        | ≤ 5 %<br>-25...+70 °C<br>500 Hz<br>DC 13<br>yes                       |
| IP 68 per BWN Pr. 20<br>☐<br>CuZn coated                              | IP 68 per BWN Pr. 20<br>☐<br>CuZn coated                               | IP 68 per BWN Pr. 20<br>☐<br>CuZn coated                               | IP 68 per BWN Pr. 20<br>☐<br>CuZn coated/<br>PA 6 transparent          | IP 67<br>CuZn coated                                                  |
| PA 12<br>Connector                                                    | PA 12<br>Connector                                                     | PA 12<br>Connector                                                     | PA 12<br>Connector                                                     | PA 12<br>Connector                                                    |
| cULus<br>BKS- 19/BKS- 20                                              | cULus<br>BKS- 19/BKS- 20                                               | cULus<br>BKS- 19/BKS- 20                                               | cULus<br>BKS- 19/BKS- 20                                               | cULus<br>BKS- 19/BKS- 20                                              |



All-round LED

|                                           |              |              |              |              |  |
|-------------------------------------------|--------------|--------------|--------------|--------------|--|
| Housing size                              | <b>M18x1</b> | <b>M18x1</b> | <b>M18x1</b> | <b>M18x1</b> |  |
| Mounting (see notes starting p. 1.0.11)   | flush        | flush        | flush        | flush        |  |
| Rated operating distance s <sub>n</sub>   | <b>5 mm</b>  | <b>5 mm</b>  | <b>5 mm</b>  | <b>5 mm</b>  |  |
| Assured operating distance s <sub>a</sub> | 0...4.1 mm   | 0...4.1 mm   | 0...4.1 mm   | 0...4.1 mm   |  |

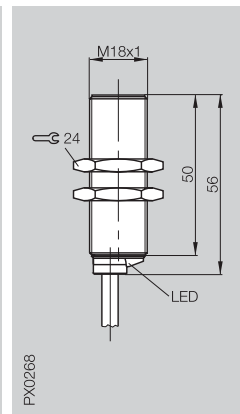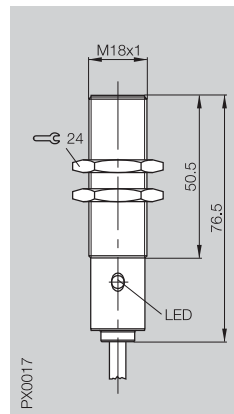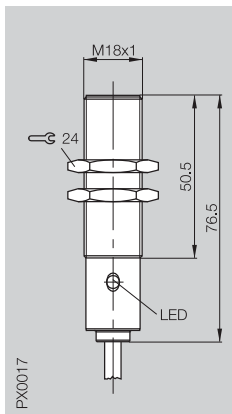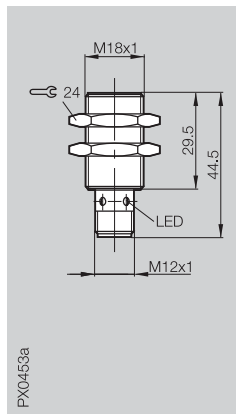






|                                               |                 |                             |                        |                        |                        |
|-----------------------------------------------|-----------------|-----------------------------|------------------------|------------------------|------------------------|
| PNP                                           | NO ①            | BES 516-326-E5-C-S4         | BES 516-326-B0-C-02    |                        | BES M18MI-PSC50B-BV02  |
|                                               | NC ②            |                             |                        |                        | BES M18MI-POC50B-BV02  |
|                                               | complementary ③ |                             |                        | BES 516-105-B0-C-03    |                        |
| NPN                                           | NO ④            |                             | BES 516-355-B0-C-02    |                        | BES M18MI-NSC50B-BV02  |
|                                               | complementary ⑥ |                             |                        | BES 516-111-B0-C-03    |                        |
| Supply voltage U <sub>B</sub>                 | 10...30 V DC    | 10...30 V DC                | 10...30 V DC           | 10...30 V DC           | 12...30 V DC           |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 2 V           | ≤ 1.5 V (PNP)/≤ 2.5 V (NPN) | ≤ 2.5 V                | ≤ 2.5 V                | ≤ 2.5 V                |
| Rated insulation voltage U <sub>i</sub>       | 75 V DC         | 250 V AC                    | 250 V AC               | 250 V AC               | 250 V AC               |
| Rated operational current I <sub>e</sub>      | 200 mA          | 200 mA                      | 200 mA                 | 200 mA                 | 200 mA                 |
| No-load supply current I <sub>0</sub> max.    | ≤ 10 mA         | ≤ 25 mA                     | ≤ 30 mA                | ≤ 30 mA                | ≤ 15 mA                |
| Polarity reversal protected                   | yes             | yes                         | yes                    | yes                    | yes                    |
| Short circuit protected                       | yes             | yes                         | yes                    | yes                    | yes                    |
| Repeat accuracy R                             | ≤ 5 %           | ≤ 5 %                       | ≤ 5 %                  | ≤ 5 %                  | ≤ 5 %                  |
| Ambient temperature range T <sub>a</sub>      | -25...+70 °C    | -25...+70 °C                | -25...+70 °C           | -25...+70 °C           | -25...+70 °C           |
| Switching frequency f                         | 1000 Hz         | 900 Hz (PNP)/500 Hz (NPN)   | 500 Hz                 | 500 Hz                 | 700 Hz                 |
| Utilization category                          | DC 13           | DC 13                       | DC 13                  | DC 13                  | DC 13                  |
| Function indicator                            | yes             | yes                         | yes                    | yes                    | yes                    |
| Degree of protection per IEC 60529            | IP 67           | IP 68 per BWN Pr. 20        | IP 67                  | IP 67                  | IP 68 per BWN Pr. 20   |
| Insulation class                              |                 | □                           | □                      | □                      | □                      |
| Housing material                              | CuZn coated     | CuZn coated                 | CuZn coated            | CuZn coated            | CuZn coated            |
| Material of sensing face                      | PBT             | PA 12                       | PA 12                  | PA 12                  | PA 12                  |
| Connection                                    | Connector       | 2 m PVC cable               | 3 m PVC cable          | 3 m PVC cable          | 2 m PVC cable          |
| No. of wires × cross-section                  |                 | 3×0.34 mm <sup>2</sup>      | 4×0.25 mm <sup>2</sup> | 4×0.25 mm <sup>2</sup> | 3×0.34 mm <sup>2</sup> |
| Approval                                      | cULus           | cULus                       | cULus                  | cULus                  | cULus                  |
| Recommended connector                         | BKS- 19/BKS- 20 |                             |                        |                        |                        |

① Wiring diagrams see page 1.0.6

Switching distance ■■ see page 1.0.10

For sensors with cable, other lengths and PUR quality are available on request.

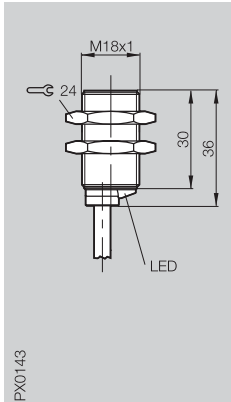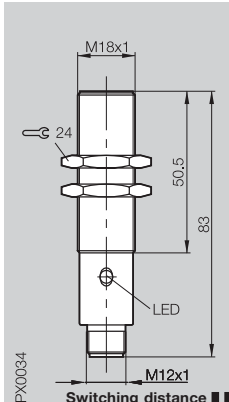
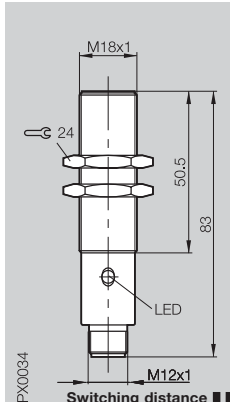
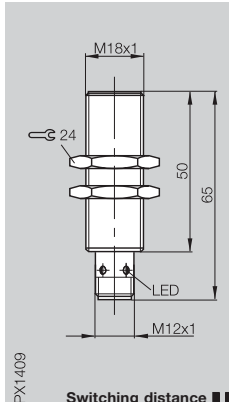
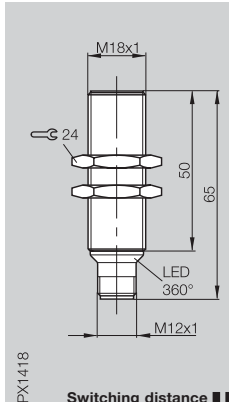


| M18x1<br>flush<br>5 mm<br>0...4.1 mm                                              | M18x1<br>flush<br>8 mm<br>0...6.5 mm                                              | M18x1<br>flush<br>8 mm<br>0...6.5 mm                                              | M18x1<br>flush<br>8 mm<br>0...6.5 mm                                               | M18x1<br>flush<br>8 mm<br>0...6.5 mm                                                |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |
| BES 516-326-E4-C-02                                                               | BES 516-326-G-S4-C                                                                | BES 516-326-G-S4-H                                                                | BES M18MI-PSC80B-S04G                                                              | BES M18MI-PSC80B-S04K                                                               |
|                                                                                   |                                                                                   | BES 516-105-G-S4-H                                                                |                                                                                    | BES M18MI-POC80B-S04K                                                               |
|                                                                                   |                                                                                   |                                                                                   |                                                                                    | BES M18MI-NSC80B-S04K                                                               |
| 10...30 V DC                                                                      | 10...30 V DC                                                                      | 10...55 V DC                                                                      | 10...30 V DC                                                                       | 12...30 V DC                                                                        |
| ≤ 2 V                                                                             | ≤ 2.5 V                                                                           | ≤ 2.5 V                                                                           | ≤ 2.5 V                                                                            | ≤ 2.5 V                                                                             |
| 75 V DC                                                                           | 75 V DC                                                                           | 75 V DC                                                                           | 250 V AC                                                                           | 250 V AC                                                                            |
| 200 mA                                                                            | 200 mA                                                                            | 200 mA                                                                            | 200 mA                                                                             | 200 mA                                                                              |
| ≤ 10 mA                                                                           | ≤ 12 mA                                                                           | ≤ 15 mA                                                                           | ≤ 18 mA                                                                            | ≤ 15 mA                                                                             |
| yes                                                                               | yes                                                                               | yes                                                                               | yes                                                                                | yes                                                                                 |
| yes                                                                               | yes                                                                               | yes                                                                               | yes                                                                                | yes                                                                                 |
| ≤ 5 %                                                                             | ≤ 5 %                                                                             | ≤ 5 %                                                                             | ≤ 5 %                                                                              | ≤ 5 %                                                                               |
| -25...+70 °C                                                                      | 0...+70 °C                                                                        | 0...+70 °C                                                                        | -25...+70 °C                                                                       | -25...+70 °C                                                                        |
| 1000 Hz                                                                           | 80 Hz                                                                             | 80 Hz                                                                             | 1000 Hz                                                                            | 150 Hz                                                                              |
| DC 13                                                                             | DC 13                                                                             | DC 13                                                                             | DC 13                                                                              | DC 13                                                                               |
| yes                                                                               | yes                                                                               | yes                                                                               | yes                                                                                | yes                                                                                 |
| IP 67                                                                             | IP 67                                                                             | IP 67                                                                             | IP 67                                                                              | IP 68 per BWN Pr. 20                                                                |
| CuZn coated                                                                       | CuZn coated                                                                       | CuZn coated                                                                       | CuZn coated                                                                        | CuZn coated/<br>PA 6 transparent                                                    |
| PBT                                                                               | PBT                                                                               | PBT                                                                               | PBT                                                                                | PA 12                                                                               |
| 2 m PVC cable                                                                     | Connector                                                                         | Connector                                                                         | Connector                                                                          | Connector                                                                           |
| 3x0.34 mm <sup>2</sup>                                                            |                                                                                   |                                                                                   |                                                                                    |                                                                                     |
| cULus                                                                             | cULus                                                                             |                                                                                   | cULus                                                                              | cULus                                                                               |
|                                                                                   | BKS-_ 19/BKS-_ 20                                                                 | BKS-_ 19/BKS-_ 20                                                                 | BKS-_ 19/BKS-_ 20                                                                  | BKS-_ 19/BKS-_ 20                                                                   |





|                                           |              |              |              |              |  |
|-------------------------------------------|--------------|--------------|--------------|--------------|--|
| Housing size                              | <b>M18x1</b> | <b>M18x1</b> | <b>M18x1</b> | <b>M18x1</b> |  |
| Mounting (see notes starting p. 1.0.11)   | flush        | flush        | flush        | flush        |  |
| Rated operating distance s <sub>n</sub>   | <b>8 mm</b>  | <b>8 mm</b>  | <b>8 mm</b>  | <b>8 mm</b>  |  |
| Assured operating distance s <sub>a</sub> | 0...6.5 mm   | 0...6.5 mm   | 0...6.5 mm   | 0...6.5 mm   |  |

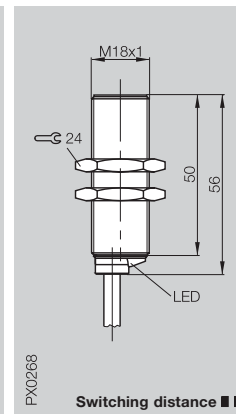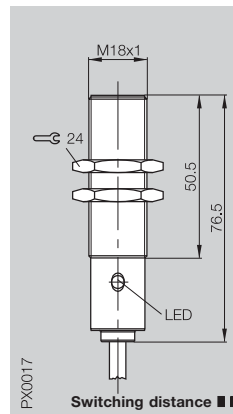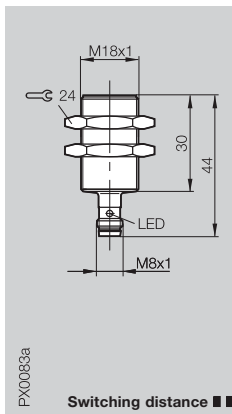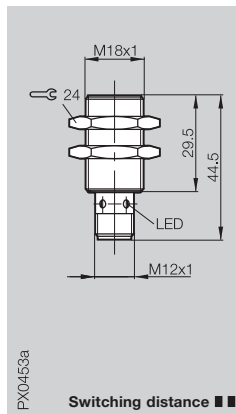

|     |               |   |                       |                        |                          |                       |  |
|-----|---------------|---|-----------------------|------------------------|--------------------------|-----------------------|--|
| PNP | NO            | ① | BES 516-326-G-E5-Y-S4 | BES 516-326-G-E5-Y-S49 | BES 516-326-G-B0-C-PU-02 | BES M18MI-PSC80B-BV02 |  |
|     | NC            | ② | BES 516-367-G-E5-Y-S4 | BES 516-367-G-E5-Y-S49 |                          |                       |  |
|     | complementary | ③ |                       |                        |                          |                       |  |
| NPN | NO            | ④ | BES 516-355-G-E5-Y-S4 | BES 516-355-G-E5-Y-S49 |                          | BES M18MI-NSC80B-BV02 |  |
|     | NC            | ⑤ |                       | BES 516-366-G-E5-Y-S49 |                          |                       |  |
|     | complementary | ⑥ |                       |                        |                          |                       |  |






|                                               |                 |                 |                        |                        |  |
|-----------------------------------------------|-----------------|-----------------|------------------------|------------------------|--|
| Supply voltage U <sub>B</sub>                 | 10...30 V DC    | 10...30 V DC    | 10...30 V DC           | 12...30 V DC           |  |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 3.5 V         | ≤ 3.5 V         | ≤ 2.5 V                | ≤ 2.5 V                |  |
| Rated insulation voltage U <sub>i</sub>       | 75 V DC         | 75 V DC         | 250 V AC               | 250 V AC               |  |
| Rated operational current I <sub>e</sub>      | 130 mA          | 130 mA          | 200 mA                 | 200 mA                 |  |
| No-load supply current I <sub>0</sub> max.    | ≤ 25 mA         | ≤ 25 mA         | ≤ 12 mA                | ≤ 15 mA                |  |
| Polarity reversal protected                   | yes             | yes             | yes                    | yes                    |  |
| Short circuit protected                       | yes             | yes             | yes                    | yes                    |  |
| Repeat accuracy R                             | ≤ 5 %           | ≤ 5 %           | ≤ 5 %                  | ≤ 5 %                  |  |
| Ambient temperature range T <sub>a</sub>      | -25...+70 °C    | -25...+70 °C    | 0...+70 °C             | -25...+70 °C           |  |
| Switching frequency f                         | 200 Hz          | 200 Hz          | 80 Hz                  | 150 Hz                 |  |
| Utilization category                          | DC 13           | DC 13           | DC 13                  | DC 13                  |  |
| Function indicator                            | yes             | yes             | yes                    | yes                    |  |
| Degree of protection per IEC 60529            | IP 67           | IP 67           | IP 67                  | IP 68 per BWN Pr. 20   |  |
| Insulation class                              |                 |                 | □                      | □                      |  |
| Housing material                              | CuZn coated     | CuZn coated     | CuZn coated            | CuZn coated            |  |
| Material of sensing face                      | PBT             | PBT             | PBT                    | PA 12                  |  |
| Connection                                    | Connector       | Connector       | 2 m cable PUR          | 2 m PVC cable          |  |
| No. of wires × cross-section                  |                 |                 | 3×0.34 mm <sup>2</sup> | 3×0.34 mm <sup>2</sup> |  |
| Approval                                      | cULus           | cULus           | cULus                  | cULus                  |  |
| Recommended connector                         | BKS- 19/BKS- 20 | BKS- 48/BKS- 49 |                        |                        |  |

① Wiring diagrams see page 1.0.6  
Switching distance ■■ see page 1.0.10

Other cable lengths on request.



| M18x1<br>flush | M18x1<br>quasi flush | M18x1<br>quasi flush | M18x1<br>non-flush | M18x1<br>non-flush |
|----------------|----------------------|----------------------|--------------------|--------------------|
| 8 mm           | 12 mm                | 12 mm                | 8 mm               | 8 mm               |
| 0...6.5 mm     | 0...9.7 mm           | 0...9.7 mm           | 0...6.5 mm         | 0...6.5 mm         |

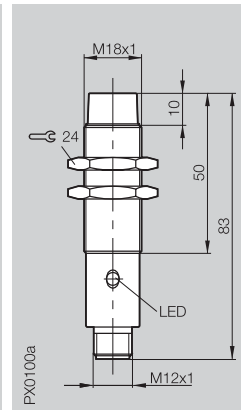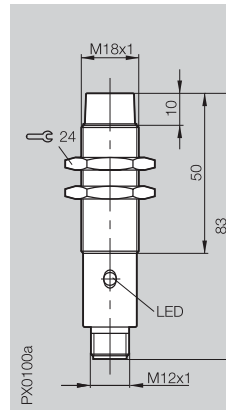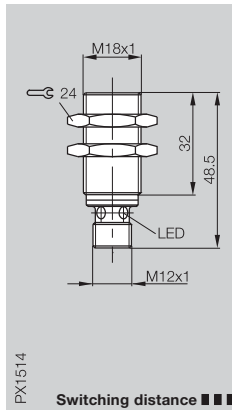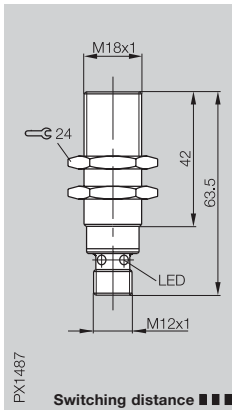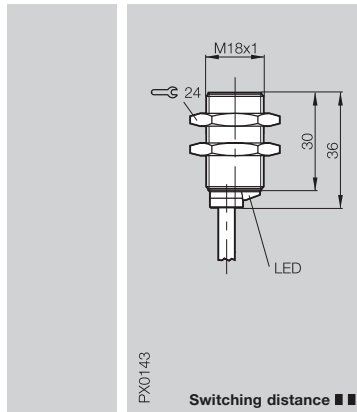

1.1





|                                                                        |                                                                     |                                                                     |                                                                       |                                                                        |
|------------------------------------------------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------|-----------------------------------------------------------------------|------------------------------------------------------------------------|
| BES 516-326-G-E4-Y-02<br>BES 516-367-G-E4-Y-02                         | BES M18MG1-PSC12B-S04G                                              | BES M18MD1-PSC12B-S04G                                              | BES 516-360-S4-C<br>BES 516-3026-S4-C                                 | BES 516-123-S4-C                                                       |
| BES 516-355-G-E4-Y-02<br>BES 516-366-G-E4-Y-02                         | BES M18MG1-NSC12B-S04G                                              | BES M18MD1-NSC12B-S04G                                              | BES 516-361-S4-C                                                      | BES 516-124-S4-C                                                       |
| 10...30 V DC<br>≤ 3.5 V<br>75 V DC<br>130 mA<br>≤ 25 mA<br>yes<br>yes  | 10...30 V DC<br>≤ 2 V<br>75 V DC<br>200 mA<br>≤ 10 mA<br>yes<br>yes | 10...30 V DC<br>≤ 2 V<br>75 V DC<br>200 mA<br>≤ 10 mA<br>yes<br>yes | 10...30 V DC<br>≤ 1.5 V<br>250 V AC<br>200 mA<br>≤ 8 mA<br>yes<br>yes | 10...30 V DC<br>≤ 2.5 V<br>250 V AC<br>200 mA<br>≤ 30 mA<br>yes<br>yes |
| ≤ 5 %<br>-25...+70 °C<br>200 Hz<br>DC 13<br>yes                        | ≤ 5 %<br>-25...+70 °C<br>500 Hz<br>DC 13<br>yes                     | ≤ 5 %<br>-25...+70 °C<br>500 Hz<br>DC 13<br>yes                     | ≤ 5 %<br>-25...+70 °C<br>600 Hz<br>DC 13<br>yes                       | ≤ 5 %<br>-25...+70 °C<br>200 Hz<br>DC 13<br>yes                        |
| IP 68 per BWN Pr. 20                                                   | IP 67                                                               | IP 67                                                               | IP 68 per BWN Pr. 20<br>□                                             | IP 67<br>□                                                             |
| CuZn coated<br>PBT<br>2 m PVC cable<br>3x0.34 mm <sup>2</sup><br>cULus | CuZn coated<br>PBT<br>Connector                                     | CuZn coated<br>PBT<br>Connector                                     | CuZn coated<br>PA 12<br>Connector                                     | CuZn coated<br>PA 12<br>Connector                                      |
|                                                                        | BKS- _ 19/BKS- _ 20                                                 | BKS- _ 19/BKS- _ 20                                                 | cULus<br>BKS- _ 19/BKS- _ 20                                          | cULus<br>BKS- _ 19/BKS- _ 20                                           |



5

Connectors,  
Holders ...  
Page 5.2 ...

|                                           |              |              |              |              |
|-------------------------------------------|--------------|--------------|--------------|--------------|
| Housing size                              | <b>M18x1</b> | <b>M18x1</b> | <b>M18x1</b> | <b>M18x1</b> |
| Mounting (see notes starting p. 1.0.11)   | non-flush    | non-flush    | non-flush    | non-flush    |
| Rated operating distance s <sub>n</sub>   | <b>8 mm</b>  | <b>8 mm</b>  | <b>8 mm</b>  | <b>8 mm</b>  |
| Assured operating distance s <sub>a</sub> | 0...6.5 mm   | 0...6.5 mm   | 0...6.5 mm   | 0...6.5 mm   |

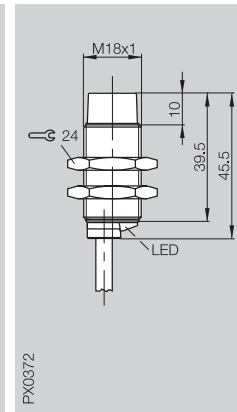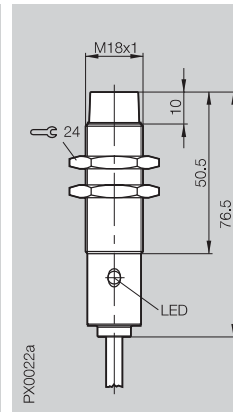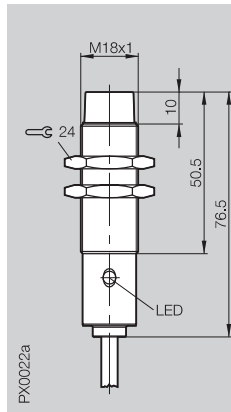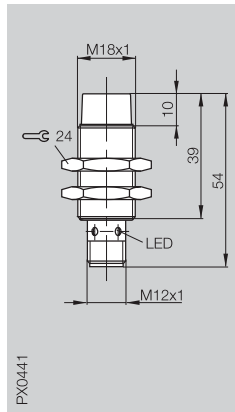





|     |                 |                      |                      |                     |                      |
|-----|-----------------|----------------------|----------------------|---------------------|----------------------|
| PNP | NO ①            | BES 516-360-E5-Y-S4  | BES 516-360-B0-C-02  |                     | BES 516-360-E4-Y-02  |
|     | NC ②            | BES 516-3026-E5-Y-S4 | BES 516-3026-B0-C-02 |                     | BES 516-3026-E4-Y-02 |
|     | complementary ③ |                      |                      | BES 516-123-B0-C-03 |                      |
| NPN | NO ④            | BES 516-361-E5-Y-S4  | BES 516-361-B0-C-02  |                     | BES 516-361-E4-Y-02  |
|     | NC ⑤            |                      | BES 516-3031-B0-C-02 |                     |                      |
|     | complementary ⑥ |                      |                      | BES 516-124-B0-C-03 |                      |

|                                               |                 |                                            |                        |                        |
|-----------------------------------------------|-----------------|--------------------------------------------|------------------------|------------------------|
| Supply voltage U <sub>B</sub>                 | 10...30 V DC    | 10...30 V DC                               | 10...30 V DC           | 10...30 V DC           |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 3.5 V         | ≤ 1.5 V                                    | ≤ 2.5 V                | ≤ 3.5 V                |
| Rated insulation voltage U <sub>i</sub>       | 75 V DC         | 250 V AC                                   | 250 V AC               | 75 V DC                |
| Rated operational current I <sub>e</sub>      | 130 mA          | 200 mA                                     | 200 mA                 | 130 mA                 |
| No-load supply current I <sub>0</sub> max.    | ≤ 25 mA         | ≤ 25 mA                                    | ≤ 30 mA                | ≤ 25 mA                |
| Polarity reversal protected                   | yes             | yes                                        | yes                    | yes                    |
| Short circuit protected                       | yes             | yes                                        | yes                    | yes                    |
| Repeat accuracy R                             | ≤ 5 %           | ≤ 5 %                                      | ≤ 5 %                  | ≤ 5 %                  |
| Ambient temperature range T <sub>a</sub>      | -25...+70 °C    | -25...+70 °C                               | -25...+70 °C           | -25...+70 °C           |
| Switching frequency f                         | 200 Hz          | 600 Hz (PNP)/200 Hz (NPN)                  | 200 Hz                 | 200 Hz                 |
| Utilization category                          | DC 13           | DC 13                                      | DC 13                  | DC 13                  |
| Function indicator                            | yes             | yes                                        | yes                    | yes                    |
| Degree of protection per IEC 60529            | IP 67           | IP 68 per BWN Pr. 20 (PNP)/<br>IP 67 (NPN) | IP 67                  | IP 68 per BWN Pr. 20   |
| Insulation class                              |                 | □                                          | □                      |                        |
| Housing material                              | CuZn coated     | CuZn coated                                | CuZn coated            | CuZn coated            |
| Material of sensing face                      | PA 12           | PA 12                                      | PA 12                  | PA 12                  |
| Connection                                    | Connector       | 2 m PVC cable                              | 3 m PVC cable          | 2 m PVC cable          |
| No. of wires × cross-section                  |                 | 3×0.34 mm <sup>2</sup>                     | 4×0.25 mm <sup>2</sup> | 3×0.34 mm <sup>2</sup> |
| Approval                                      | cULus           | cULus                                      | cULus                  | cULus                  |
| Recommended connector                         | BKS- 19/BKS- 20 |                                            |                        |                        |

① Wiring diagrams see page 1.0.6  
Switching distance ■■ see page 1.0.10





For sensors with cable, other lengths and  
PUR quality are available on request.

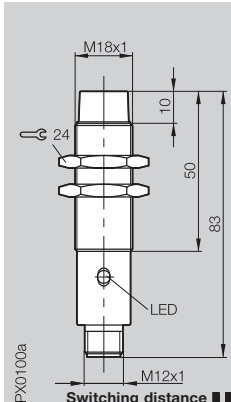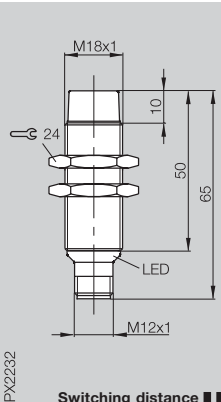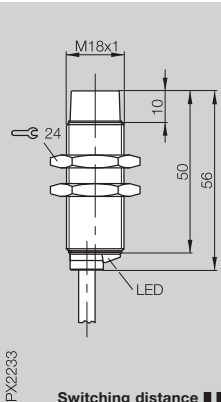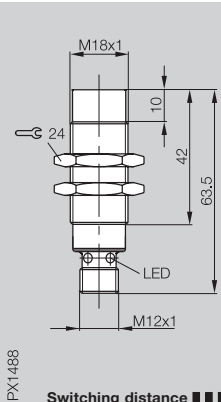

| M18x1<br>non-flush<br>16 mm<br>0...13 mm                                          | M18x1<br>non-flush<br>16 mm<br>0...12.8 mm                                        | M18x1<br>non-flush<br>16 mm<br>0...12.8 mm                                        | M18x1<br>non-flush<br>20 mm<br>0...16.2 mm                                         |  |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|--|
|  |  |  |  |  |
| BES 516-360-G-S4-H                                                                | BES M18MG-PSC16F-S04K<br>BES M18MG-POC16F-S04K                                    | BES M18MG-PSC16F-BV02<br>BES M18MG-POC16F-BV02                                    | BES M18ME1-PSC20F-S04G                                                             |  |
| BES 516-123-G-S4-H                                                                |                                                                                   |                                                                                   |                                                                                    |  |
|                                                                                   | BES M18MG-NSC16F-S04K<br>BES M18MG-NOC16F-S04K                                    | BES M18MG-NSC16F-BV02<br>BES M18MG-NOC16F-BV02                                    | BES M18ME1-NSC20F-S04G                                                             |  |
| 10...55 V DC                                                                      | 10...30 V DC                                                                      | 10...30 V DC                                                                      | 10...30 V DC                                                                       |  |
| ≤ 2.5 V                                                                           | ≤ 2.5 V                                                                           | ≤ 2.5 V                                                                           | ≤ 2 V                                                                              |  |
| 250 V AC                                                                          | 250 V AC                                                                          | 250 V AC                                                                          | 75 V DC                                                                            |  |
| 200 mA                                                                            | 200 mA                                                                            | 200 mA                                                                            | 200 mA                                                                             |  |
| ≤ 15 mA                                                                           | ≤ 14 mA                                                                           | ≤ 14 mA                                                                           | ≤ 10 mA                                                                            |  |
| yes                                                                               | yes                                                                               | yes                                                                               | yes                                                                                |  |
| yes                                                                               | yes                                                                               | yes                                                                               | yes                                                                                |  |
| ≤ 5 %                                                                             | ≤ 5 %                                                                             | ≤ 5 %                                                                             | ≤ 5 %                                                                              |  |
| -25...+70 °C                                                                      | -25...+70 °C                                                                      | -25...+70 °C                                                                      | -25...+70 °C                                                                       |  |
| 80 Hz                                                                             | 800 Hz                                                                            | 800 Hz                                                                            | 200 Hz                                                                             |  |
| DC 13                                                                             | DC 13                                                                             | DC 13                                                                             | DC 13                                                                              |  |
| yes                                                                               | yes                                                                               | yes                                                                               | yes                                                                                |  |
| IP 68 per BWN Pr. 20                                                              | IP 67                                                                             | IP 67                                                                             | IP 54                                                                              |  |
| ☐                                                                                 | ☐                                                                                 | ☐                                                                                 |                                                                                    |  |
| CuZn coated                                                                       | CuZn coated                                                                       | CuZn coated                                                                       | CuZn coated                                                                        |  |
| PA 12                                                                             | PBT                                                                               | PBT                                                                               | PBT                                                                                |  |
| Connector                                                                         | Connector                                                                         | 2 m PVC cable<br>3x0.34 mm <sup>2</sup>                                           | Connector                                                                          |  |
|                                                                                   | cULus                                                                             | cULus                                                                             |                                                                                    |  |
| BKS- _ 19/BKS- _ 20                                                               | BKS- _ 19/BKS- _ 20                                                               |                                                                                   | BKS- _ 19/BKS- _ 20                                                                |  |



|                                           |                |                |                |                |  |
|-------------------------------------------|----------------|----------------|----------------|----------------|--|
| Housing size                              | <b>M30x1.5</b> | <b>M30x1.5</b> | <b>M30x1.5</b> | <b>M30x1.5</b> |  |
| Mounting (see notes starting p. 1.0.11)   | flush          | flush          | flush          | flush          |  |
| Rated operating distance s <sub>n</sub>   | <b>10 mm</b>   | <b>10 mm</b>   | <b>10 mm</b>   | <b>10 mm</b>   |  |
| Assured operating distance s <sub>a</sub> | 0...8.1 mm     | 0...8.1 mm     | 0...8.1 mm     | 0...8.1 mm     |  |

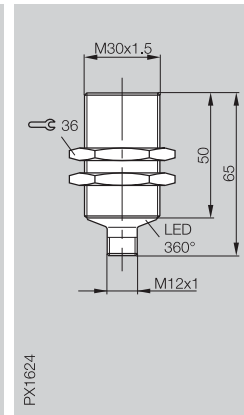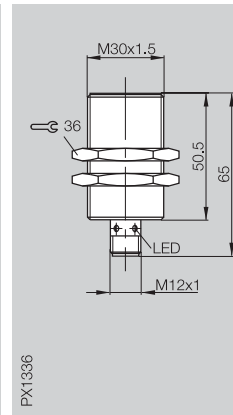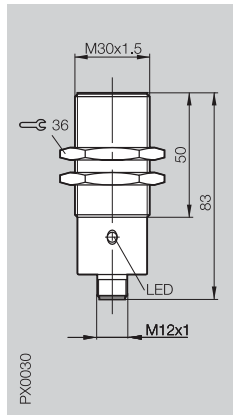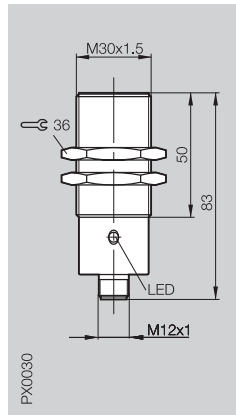

|     |                 |                   |                  |                       |                       |
|-----|-----------------|-------------------|------------------|-----------------------|-----------------------|
| PNP | NO ①            | BES 516-327-S4-C  |                  | BES M30MI-PSC10B-S04G | BES M30MI-PSC10B-S04K |
|     | NC ②            | BES 516-3028-S4-C |                  |                       | BES M30MI-POC10B-S04K |
|     | complementary ③ |                   | BES 516-114-S4-C |                       |                       |
| NPN | NO ④            | BES 516-359-S4-C  |                  |                       | BES M30MI-NSC10B-S04K |
|     | NC ⑤            |                   | BES 516-120-S4-C |                       | BES M30MI-NOC10B-S04K |
|     | complementary ⑥ |                   |                  |                       |                       |


|                                               |                      |                     |                     |                                  |  |
|-----------------------------------------------|----------------------|---------------------|---------------------|----------------------------------|--|
| Supply voltage U <sub>B</sub>                 | 10...30 V DC         | 10...30 V DC        | 12...30 V DC        | 12...30 V DC                     |  |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 2.5 V              | ≤ 2.5 V             | ≤ 2.5 V             | ≤ 2.5 V                          |  |
| Rated insulation voltage U <sub>i</sub>       | 250 V AC             | 250 V AC            | 75 V DC             | 250 V AC                         |  |
| Rated operational current I <sub>e</sub>      | 200 mA               | 200 mA              | 200 mA              | 200 mA                           |  |
| No-load supply current I <sub>0</sub> max.    | ≤ 25 mA              | ≤ 30 mA             | ≤ 10 mA             | ≤ 10 mA                          |  |
| Polarity reversal protected                   | yes                  | yes                 | yes                 | yes                              |  |
| Short circuit protected                       | yes                  | yes                 | yes                 | yes                              |  |
| Repeat accuracy R                             | ≤ 5 %                | ≤ 5 %               | ≤ 5 %               | ≤ 5 %                            |  |
| Ambient temperature range T <sub>a</sub>      | -25...+70 °C         | -25...+70 °C        | -25...+70 °C        | -25...+70 °C                     |  |
| Switching frequency f                         | 300 Hz               | 300 Hz              | 400 Hz              | 400 Hz                           |  |
| Utilization category                          | DC 13                | DC 13               | DC 13               | DC 13                            |  |
| Function indicator                            | yes                  | yes                 | yes                 | yes                              |  |
| Degree of protection per IEC 60529            | IP 68 per BWN Pr. 20 | IP 67               | IP 67               | IP 68 per BWN Pr. 20             |  |
| Insulation class                              | □                    | □                   |                     | □                                |  |
| Housing material                              | CuZn coated          | CuZn coated         | CuZn coated         | CuZn coated/<br>PA 6 transparent |  |
| Material of sensing face                      | PA 12                | PA 12               | PA 12               | PA 12                            |  |
| Connection                                    | Connector            | Connector           | Connector           | Connector                        |  |
| No. of wires × cross-section                  |                      |                     |                     |                                  |  |
| Approval                                      | cULus                | cULus               | cULus               | cULus                            |  |
| Recommended connector                         | BKS- _ 19/BKS- _ 20  | BKS- _ 19/BKS- _ 20 | BKS- _ 19/BKS- _ 20 | BKS- _ 19/BKS- _ 20              |  |

① Wiring diagrams see page 1.0.6

For sensors with cable, other lengths and  
PUR quality are available on request.



| M30×1.5    | M30×1.5    | M30×1.5    | M30×1.5    | M30×1.5    |
|------------|------------|------------|------------|------------|
| flush      | flush      | flush      | flush      | flush      |
| 10 mm      | 10 mm      | 10 mm      | 10 mm      | 10 mm      |
| 0...8.1 mm | 0...8.1 mm | 0...8.1 mm | 0...8.1 mm | 0...8.1 mm |

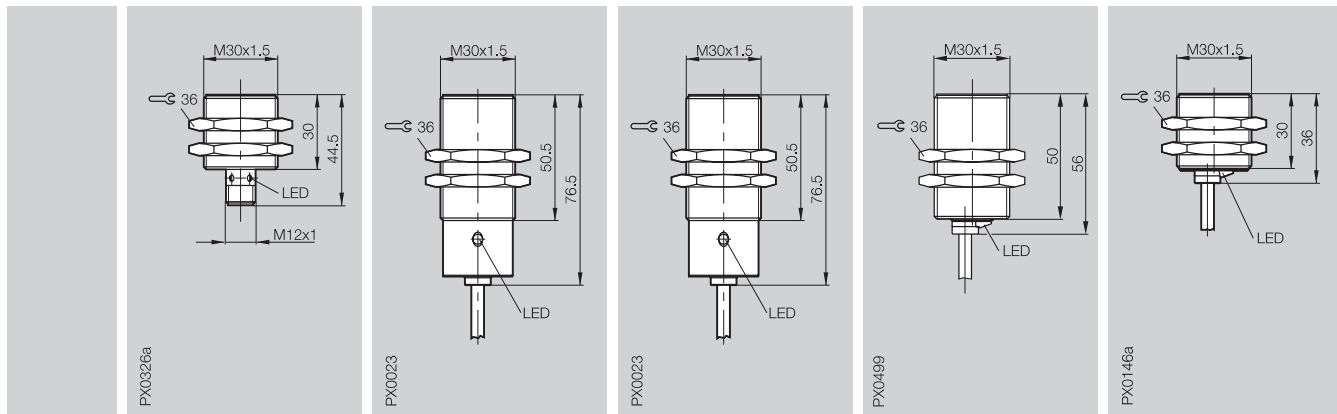

1.1





|                                             |                        |                        |                                                |                        |
|---------------------------------------------|------------------------|------------------------|------------------------------------------------|------------------------|
| BES 516-327-E5-Y-S4<br>BES 516-3028-E5-Y-S4 | BES 516-327-B0-C-02    | BES 516-114-B0-C-03    | BES M30MI-PSC10B-BV02<br>BES M30MI-POC10B-BV02 | BES 516-327-E4-Y-02    |
| BES 516-359-E5-Y-S4                         | BES 516-359-B0-C-02    | BES 516-120-B0-C-03    | BES M30MI-NSC10B-BV02<br>BES M30MI-NOC10B-BV02 | BES 516-359-E4-Y-02    |
| 10...30 V DC                                | 10...30 V DC           | 10...30 V DC           | 12...30 V DC                                   | 10...30 V DC           |
| ≤ 3.5 V                                     | ≤ 2.5 V                | ≤ 2.5 V                | ≤ 2.5 V                                        | ≤ 3.5 V                |
| 75 V DC                                     | 250 V AC               | 250 V AC               | 250 V AC                                       | 75 V DC                |
| 130 mA                                      | 200 mA                 | 200 mA                 | 200 mA                                         | 130 mA                 |
| ≤ 25 mA                                     | ≤ 25 mA                | ≤ 30 mA                | ≤ 10 mA                                        | ≤ 25 mA                |
| yes                                         | yes                    | yes                    | yes                                            | yes                    |
| yes                                         | yes                    | yes                    | yes                                            | yes                    |
| ≤ 5 %                                       | ≤ 5 %                  | ≤ 5 %                  | ≤ 5 %                                          | ≤ 5 %                  |
| -25...+70 °C                                | -25...+70 °C           | -25...+70 °C           | -25...+70 °C                                   | -25...+70 °C           |
| 500 Hz                                      | 300 Hz                 | 300 Hz                 | 400 Hz                                         | 200 Hz                 |
| DC 13                                       | DC 13                  | DC 13                  | DC 13                                          | DC 13                  |
| yes                                         | yes                    | yes                    | yes                                            | yes                    |
| IP 67                                       | IP 68 per BWN Pr. 20   | IP 67                  | IP 68 per BWN Pr. 20                           | IP 68 per BWN Pr. 20   |
| CuZn coated                                 | CuZn coated            | CuZn coated            | CuZn coated                                    | CuZn coated            |
| PA 12                                       | PA 12                  | PA 12                  | PA 12                                          | PA 12                  |
| Connector                                   | 2 m PVC cable          | 3 m PVC cable          | 2 m PVC cable                                  | 2 m PVC cable          |
|                                             | 3×0.34 mm <sup>2</sup> | 4×0.25 mm <sup>2</sup> | 3×0.34 mm <sup>2</sup>                         | 3×0.34 mm <sup>2</sup> |
| cULus                                       | cULus                  | cULus                  | cULus                                          | cULus                  |
| BKS- 19/BKS- 20                             |                        |                        |                                                |                        |



5

Connectors,  
Holders ...  
Page 5.2 ...

|                                           |                |                |                |                |  |
|-------------------------------------------|----------------|----------------|----------------|----------------|--|
| Housing size                              | <b>M30x1.5</b> | <b>M30x1.5</b> | <b>M30x1.5</b> | <b>M30x1.5</b> |  |
| Mounting (see notes starting p. 1.0.11)   | flush          | flush          | flush          | flush          |  |
| Rated operating distance s <sub>n</sub>   | <b>15 mm</b>   | <b>15 mm</b>   | <b>15 mm</b>   | <b>15 mm</b>   |  |
| Assured operating distance s <sub>a</sub> | 0...12.2 mm    | 0...12.2 mm    | 0...12.2 mm    | 0...12.2 mm    |  |

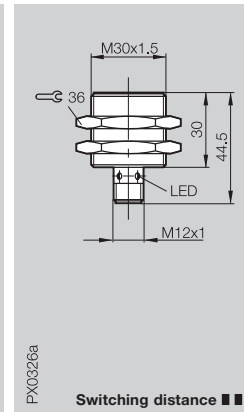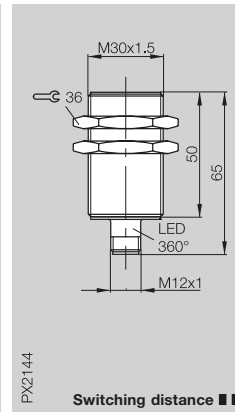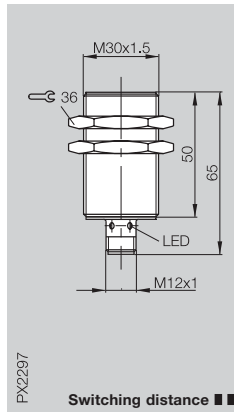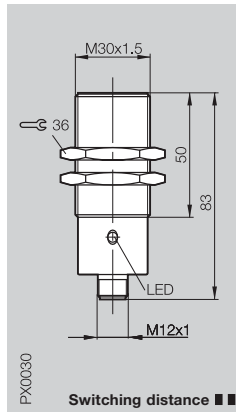

|                                               |                      |   |                    |                       |                       |                       |                        |  |
|-----------------------------------------------|----------------------|---|--------------------|-----------------------|-----------------------|-----------------------|------------------------|--|
| PNP                                           | NO                   | ① |                    | BES M30MI-PSC15B-S04G | BES M30MI-PSC15B-S04K | BES M30MI-POC15B-S04K | BES 516-327-G-E5-Y-S4  |  |
|                                               | NC                   | ② |                    |                       |                       |                       | BES 516-3028-G-E5-Y-S4 |  |
|                                               | complementary        | ③ | BES 516-114-G-S4-H |                       |                       |                       |                        |  |
| NPN                                           | NO                   | ④ |                    |                       | BES M30MI-NSC15B-S04K |                       |                        |  |
|                                               | NC                   | ⑤ |                    |                       | BES M30MI-NOC15B-S04K |                       |                        |  |
| Supply voltage U <sub>B</sub>                 | 10...55 V DC         |   |                    | 10...30 V DC          | 10...30 V DC          | 10...30 V DC          | 10...30 V DC           |  |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 2.5 V              |   |                    | ≤ 2.5 V               | ≤ 2.5 V               | ≤ 2.5 V               | ≤ 3.5 V                |  |
| Rated insulation voltage U <sub>i</sub>       | 250 V AC             |   |                    | 250 V AC              | 250 V AC              | 250 V AC              | 75 V DC                |  |
| Rated operational current I <sub>e</sub>      | 200 mA               |   |                    | 200 mA                | 200 mA                | 200 mA                | 130 mA                 |  |
| No-load supply current I <sub>0</sub> max.    | ≤ 15 mA              |   |                    | ≤ 10 mA               | ≤ 10 mA               | ≤ 10 mA               | ≤ 25 mA                |  |
| Polarity reversal protected                   | yes                  |   |                    | yes                   | yes                   | yes                   | yes                    |  |
| Short circuit protected                       | yes                  |   |                    | yes                   | yes                   | yes                   | yes                    |  |
| Repeat accuracy R                             | ≤ 5 %                |   |                    | ≤ 5 %                 | ≤ 5 %                 | ≤ 5 %                 | ≤ 5 %                  |  |
| Ambient temperature range T <sub>a</sub>      | -25...+70 °C         |   |                    | -25...+70 °C          | -25...+70 °C          | -25...+70 °C          | -25...+70 °C           |  |
| Switching frequency f                         | 150 Hz               |   |                    | 100 Hz                | 100 Hz                | 100 Hz                | 100 Hz                 |  |
| Utilization category                          | DC 13                |   |                    | DC 13                 | DC 13                 | DC 13                 | DC 13                  |  |
| Function indicator                            | yes                  |   |                    | yes                   | yes                   | yes                   | yes                    |  |
| Degree of protection per IEC 60529            | IP 68 per BWN Pr. 20 |   |                    | IP 67                 | IP 67                 | IP 67                 | IP 67                  |  |
| Insulation class                              | □                    |   |                    | □                     | □                     | □                     |                        |  |
| Housing material                              | CuZn coated          |   |                    | CuZn coated           | CuZn coated           | CuZn coated           | CuZn coated            |  |
| Material of sensing face                      | PA 12                |   |                    | PA 12                 | PA 12                 | PA 12                 | PA 12                  |  |
| Connection                                    | Connector            |   |                    | Connector             | Connector             | Connector             | Connector              |  |
| No. of wires × cross-section                  |                      |   |                    |                       |                       |                       |                        |  |
| Approval                                      |                      |   |                    | cULus                 | cULus                 | cULus                 | cULus                  |  |
| Recommended connector                         | BKS-_ 19/BKS-_ 20    |   |                    | BKS-_ 19/BKS-_ 20     | BKS-_ 19/BKS-_ 20     | BKS-_ 19/BKS-_ 20     | BKS-_ 19/BKS-_ 20      |  |


① Wiring diagrams see page 1.0.6  
Switching distance ■■ see page 1.0.10

For sensors with cable, other lengths and PUR quality are available on request.





| M30x1.5     | M30x1.5     | M30x1.5     | M30x1.5     |  |
|-------------|-------------|-------------|-------------|--|
| flush       | flush       | flush       | quasi flush |  |
| 15 mm       | 15 mm       | 15 mm       | 22 mm       |  |
| 0...12.2 mm | 0...12.2 mm | 0...12.2 mm | 0...17.8 mm |  |




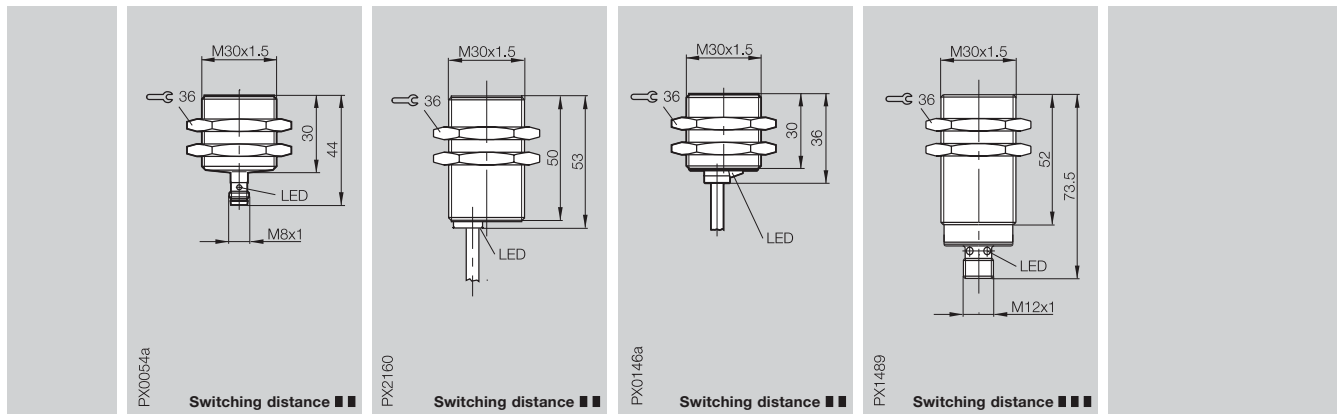


|                        |                                                |                                                 |                                                  |  |
|------------------------|------------------------------------------------|-------------------------------------------------|--------------------------------------------------|--|
| BES 516-327-G-E5-Y-S49 | BES M30MI-PSC15B-BV02<br>BES M30MI-POC15B-BV02 | BES 516-327-G-E4-Y-02<br>BES 516-3028-G-E4-Y-02 | BES M30MI1-PSC22B-S04G<br>BES M30MI1-POC22B-S04G |  |
| BES 516-359-G-E5-Y-S49 |                                                | BES 516-359-G-E4-Y-02                           | BES M30MI1-NSC22B-S04G                           |  |
| 10...30 V DC           | 10...30 V DC                                   | 10...30 V DC                                    | 10...30 V DC                                     |  |
| ≤ 3.5 V                | ≤ 2.5 V                                        | ≤ 3.5 V                                         | ≤ 2 V                                            |  |
| 75 V DC                | 250 V AC                                       | 75 V DC                                         | 75 V DC                                          |  |
| 130 mA                 | 200 mA                                         | 130 mA                                          | 200 mA                                           |  |
| ≤ 25 mA                | ≤ 10 mA                                        | ≤ 25 mA                                         | ≤ 10 mA                                          |  |
| yes                    | yes                                            | yes                                             | yes                                              |  |
| yes                    | yes                                            | yes                                             | yes                                              |  |
| ≤ 5 %                  | ≤ 5 %                                          | ≤ 5 %                                           | ≤ 5 %                                            |  |
| -25...+70 °C           | -25...+70 °C                                   | -25...+70 °C                                    | -25...+70 °C                                     |  |
| 100 Hz                 | 100 Hz                                         | 100 Hz                                          | 200 Hz                                           |  |
| DC 13                  | DC 13                                          | DC 13                                           | DC 13                                            |  |
| yes                    | yes                                            | yes                                             | yes                                              |  |
| IP 67                  | IP 67                                          | IP 68 per BWN Pr. 20                            | IP 67                                            |  |
| CuZn coated            | CuZn coated                                    | CuZn coated                                     | CuZn coated                                      |  |
| PA 12                  | PA 12                                          | PA 12                                           | PBT                                              |  |
| Connector              | 2 m PVC cable                                  | 2 m PVC cable                                   | Connector                                        |  |
|                        | 3x0.34 mm <sup>2</sup>                         | 3x0.34 mm <sup>2</sup>                          |                                                  |  |
| cULus                  | cULus                                          | cULus                                           |                                                  |  |
| BKS-_ 48/BKS-_ 49      |                                                |                                                 | BKS-_ 19/BKS-_ 20                                |  |





|                                           |                |                |                |                |  |
|-------------------------------------------|----------------|----------------|----------------|----------------|--|
| Housing size                              | <b>M30x1.5</b> | <b>M30x1.5</b> | <b>M30x1.5</b> | <b>M30x1.5</b> |  |
| Mounting (see notes starting p. 1.0.11)   | non-flush      | non-flush      | non-flush      | non-flush      |  |
| Rated operating distance s <sub>n</sub>   | <b>15 mm</b>   | <b>15 mm</b>   | <b>15 mm</b>   | <b>15 mm</b>   |  |
| Assured operating distance s <sub>a</sub> | 0...12.2 mm    | 0...12.2 mm    | 0...12.2 mm    | 0...12.2 mm    |  |

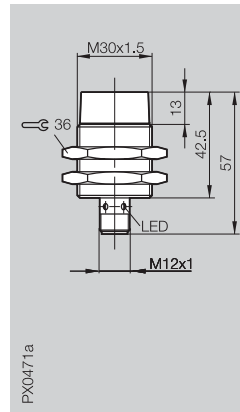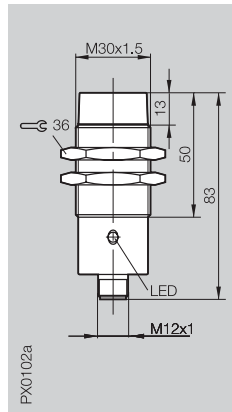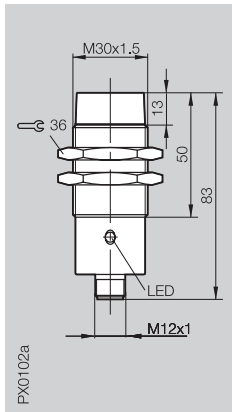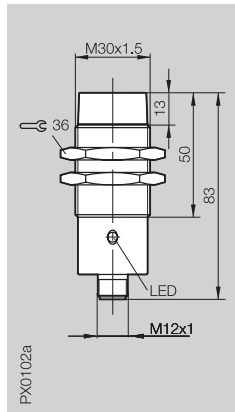

|     |                 |                   |                  |                  |                      |
|-----|-----------------|-------------------|------------------|------------------|----------------------|
| PNP | NO ①            | BES 516-362-S4-C  |                  | BES 516-362-S4-H | BES 516-362-E5-Y-S4  |
|     | NC ②            | BES 516-3029-S4-C |                  |                  | BES 516-3029-E5-Y-S4 |
|     | complementary ③ |                   | BES 516-125-S4-C |                  |                      |
| NPN | NO ④            | BES 516-363-S4-C  |                  |                  | BES 516-363-E5-Y-S4  |
|     | NC ⑤            | BES 516-3033-S4-C |                  |                  |                      |
|     | complementary ⑥ |                   |                  |                  |                      |

|                                               |                      |                      |                      |                 |  |
|-----------------------------------------------|----------------------|----------------------|----------------------|-----------------|--|
| Supply voltage U <sub>B</sub>                 | 10...30 V DC         | 10...30 V DC         | 10...55 V DC         | 10...30 V DC    |  |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 2.5 V              | ≤ 2.5 V              | ≤ 1.5 V              | ≤ 3.5 V         |  |
| Rated insulation voltage U <sub>i</sub>       | 250 V AC             | 250 V AC             | 250 V AC             | 75 V DC         |  |
| Rated operational current I <sub>e</sub>      | 200 mA               | 200 mA               | 200 mA               | 130 mA          |  |
| No-load supply current I <sub>0</sub> max.    | ≤ 25 mA              | ≤ 30 mA              | ≤ 12 mA              | ≤ 25 mA         |  |
| Polarity reversal protected                   | yes                  | yes                  | yes                  | yes             |  |
| Short circuit protected                       | yes                  | yes                  | yes                  | yes             |  |
| Repeat accuracy R                             | ≤ 5 %                | ≤ 5 %                | ≤ 5 %                | ≤ 5 %           |  |
| Ambient temperature range T <sub>a</sub>      | -25...+70 °C         | -25...+70 °C         | -25...+70 °C         | -25...+70 °C    |  |
| Switching frequency f                         | 100 Hz               | 100 Hz               | 400 Hz               | 100 Hz          |  |
| Utilization category                          | DC 13                | DC 13                | DC 13                | DC 13           |  |
| Function indicator                            | yes                  | yes                  | yes                  | yes             |  |
| Degree of protection per IEC 60529            | IP 68 per BWN Pr. 20 | IP 68 per BWN Pr. 20 | IP 68 per BWN Pr. 20 | IP 67           |  |
| Insulation class                              | □                    | □                    | □                    |                 |  |
| Housing material                              | CuZn coated          | CuZn coated          | CuZn coated          | CuZn coated     |  |
| Material of sensing face                      | PA 12                | PA 12                | PA 12                | PA 12           |  |
| Connection                                    | Connector            | Connector            | Connector            | Connector       |  |
| No. of wires × cross-section                  |                      |                      |                      |                 |  |
| Approval                                      | cULus                | cULus                |                      | cULus           |  |
| Recommended connector                         | BKS- 19/BKS- 20      | BKS- 19/BKS- 20      | BKS- 19/BKS- 20      | BKS- 19/BKS- 20 |  |


① Wiring diagrams see page 1.0.6

Switching distance ■■ see page 1.0.10

For sensors with cable, other lengths and PUR quality are available on request.




| M30×1.5<br>non-flush<br>15 mm<br>0...12.2 mm | M30×1.5<br>non-flush<br>15 mm<br>0...12.2 mm | M30×1.5<br>non-flush<br>15 mm<br>0...12.2 mm | M30×1.5<br>non-flush<br>30 mm<br>0...24.3 mm | M30×1.5<br>non-flush<br>30 mm<br>0...24.3 mm |
|----------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|
|----------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|----------------------------------------------|

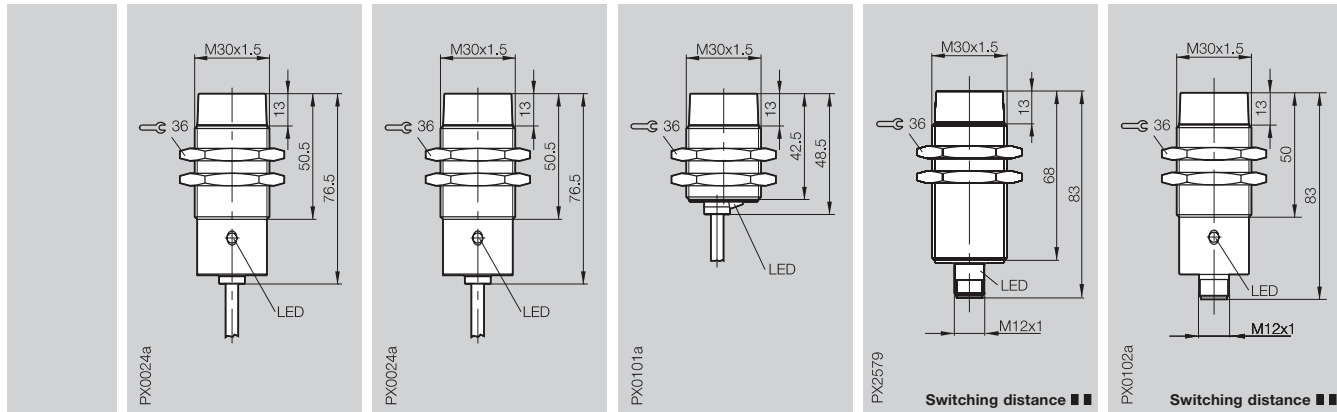

1.1





|                                                                          |                                                                          |                                                                          |                                                                        |                                                                        |
|--------------------------------------------------------------------------|--------------------------------------------------------------------------|--------------------------------------------------------------------------|------------------------------------------------------------------------|------------------------------------------------------------------------|
| BES 516-362-B0-C-02<br>BES 516-3029-B0-C-02                              | BES 516-125-B0-C-03                                                      | BES 516-362-E4-Y-02<br>BES 516-3029-E4-Y-02                              | BES M30MM-PSC30F-S04K<br>BES M30MM-POC30F-S04K                         | BES 516-362-G-S4-H                                                     |
| BES 516-363-B0-C-02<br>BES 516-3033-B0-C-02                              | BES 516-126-B0-C-03                                                      | BES 516-363-E4-Y-02                                                      | BES M30MM-NSC30F-S04K<br>BES M30MM-NOC30F-S04K                         |                                                                        |
| 10...30 V DC<br>≤ 2.5 V<br>250 V AC<br>200 mA<br>≤ 25 mA<br>yes<br>yes   | 10...30 V DC<br>≤ 2.5 V<br>250 V AC<br>200 mA<br>≤ 30 mA<br>yes<br>yes   | 10...30 V DC<br>≤ 3.5 V<br>75 V DC<br>130 mA<br>≤ 25 mA<br>yes<br>yes    | 10...30 V DC<br>≤ 2.5 V<br>250 V AC<br>200 mA<br>≤ 10 mA<br>yes<br>yes | 10...55 V DC<br>≤ 2.5 V<br>250 V AC<br>200 mA<br>≤ 15 mA<br>yes<br>yes |
| ≤ 5 %<br>-25...+70 °C<br>100 Hz<br>DC 13<br>yes                          | ≤ 5 %<br>-25...+70 °C<br>100 Hz<br>DC 13<br>yes                          | ≤ 5 %<br>-25...+70 °C<br>100 Hz<br>DC 13<br>yes                          | ≤ 5 %<br>-25...+70 °C<br>300 Hz<br>DC 13<br>yes                        | ≤ 5 %<br>-25...+70 °C<br>70 Hz<br>DC 13<br>yes                         |
| IP 68 per BWN Pr. 20<br>□                                                | IP 67<br>□                                                               | IP 68 per BWN Pr. 20                                                     | IP 67                                                                  | IP 68 per BWN Pr. 20<br>□                                              |
| CuZn coated<br>PA 12<br>2 m PVC cable<br>3×0.34 mm <sup>2</sup><br>cULus | CuZn coated<br>PA 12<br>3 m PVC cable<br>4×0.25 mm <sup>2</sup><br>cULus | CuZn coated<br>PA 12<br>2 m PVC cable<br>3×0.34 mm <sup>2</sup><br>cULus | CuZn coated<br>PBT<br>Connector<br><br>cULus<br>BKS- _ 19/BKS- _ 20    | CuZn coated<br>PA 12<br>Connector<br><br>BKS- _ 19/BKS- _ 20           |

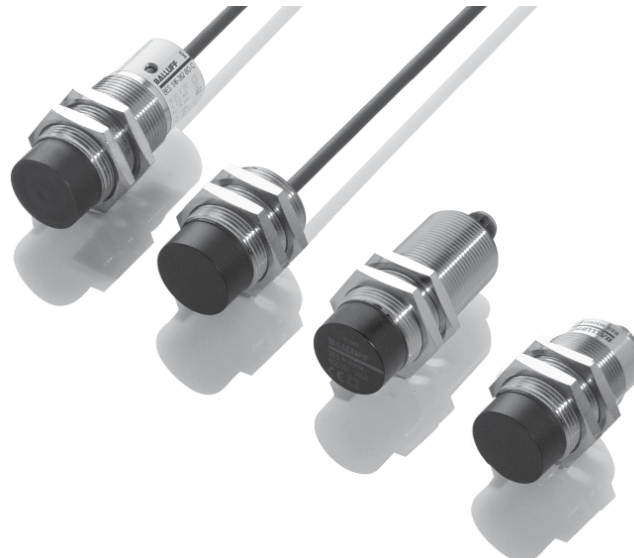

5

Connectors,  
Holders ...  
Page 5.2 ...

|                                           |                |                |  |  |  |
|-------------------------------------------|----------------|----------------|--|--|--|
| Housing size                              | <b>M30x1.5</b> | <b>M30x1.5</b> |  |  |  |
| Mounting (see notes starting p. 1.0.11)   | non-flush      | non-flush      |  |  |  |
| Rated operating distance s <sub>n</sub>   | <b>30 mm</b>   | <b>40 mm</b>   |  |  |  |
| Assured operating distance s <sub>a</sub> | 0...24.3 mm    | 0...32.4 mm    |  |  |  |

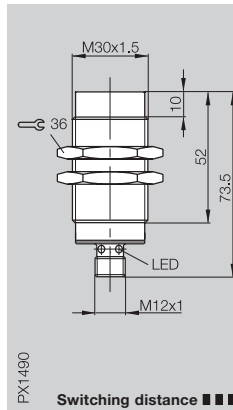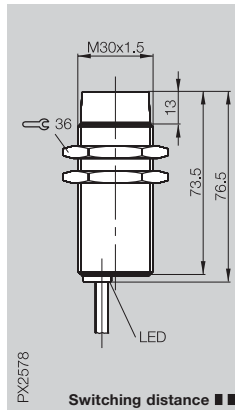

|                                               |                        |   |                       |                        |  |  |  |
|-----------------------------------------------|------------------------|---|-----------------------|------------------------|--|--|--|
| PNP                                           | NO                     | ① | BES M30MM-PSC30F-BV02 | BES M30MG1-PSC40F-S04G |  |  |  |
|                                               | NC                     | ② | BES M30MM-POC30F-BV02 |                        |  |  |  |
| NPN                                           | NO                     | ④ | BES M30MM-NSC30F-BV02 |                        |  |  |  |
|                                               | NC                     | ⑤ | BES M30MM-NOC30F-BV02 |                        |  |  |  |
| Supply voltage U <sub>B</sub>                 | 10...30 V DC           |   | 10...30 V DC          |                        |  |  |  |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 2.5 V                |   | ≤ 2 V                 |                        |  |  |  |
| Rated insulation voltage U <sub>i</sub>       | 250 V AC               |   | 75 V DC               |                        |  |  |  |
| Rated operational current I <sub>e</sub>      | 200 mA                 |   | 200 mA                |                        |  |  |  |
| No-load supply current I <sub>0</sub> max.    | ≤ 10 mA                |   | ≤ 10 mA               |                        |  |  |  |
| Polarity reversal protected                   | yes                    |   | yes                   |                        |  |  |  |
| Short circuit protected                       | yes                    |   | yes                   |                        |  |  |  |
| Repeat accuracy R                             | ≤ 5 %                  |   | ≤ 5 %                 |                        |  |  |  |
| Ambient temperature range T <sub>a</sub>      | -25...+70 °C           |   | -25...+70 °C          |                        |  |  |  |
| Switching frequency f                         | 300 Hz                 |   | 100 Hz                |                        |  |  |  |
| Utilization category                          | DC 13                  |   | DC 13                 |                        |  |  |  |
| Function indicator                            | yes                    |   | yes                   |                        |  |  |  |
| Degree of protection per IEC 60529            | IP 67                  |   | IP 54                 |                        |  |  |  |
| Housing material                              | CuZn coated            |   | CuZn coated           |                        |  |  |  |
| Material of sensing face                      | PBT                    |   | PBT                   |                        |  |  |  |
| Connection                                    | 2 m PVC cable          |   | Connector             |                        |  |  |  |
| No. of wires × cross-section                  | 3×0.34 mm <sup>2</sup> |   |                       |                        |  |  |  |
| Approval                                      | cULus                  |   |                       |                        |  |  |  |
| Recommended connector                         |                        |   | BKS- 19/BKS- 20       |                        |  |  |  |

① Wiring diagrams see page 1.0.6  
Switching distance ■■ see page 1.0.10

Other cable lengths on request.




# 5x5x46 mm, 5x5x33 mm, 5x5x25 mm

## Inductive Sensors

DC 3-wire  
Block style housings  
s<sub>n</sub> 0.8 mm

| 5x5x46 mm  | 5x5x33 mm  | 5x5x25 mm  | 5x5x25 mm  | 5x5x25 mm  |
|------------|------------|------------|------------|------------|
| flush      | flush      | flush      | flush      | flush      |
| 0.8 mm     | 0.8 mm     | 0.8 mm     | 0.8 mm     | 0.8 mm     |
| 0...0.6 mm | 0...0.6 mm | 0...0.6 mm | 0...0.6 mm | 0...0.6 mm |

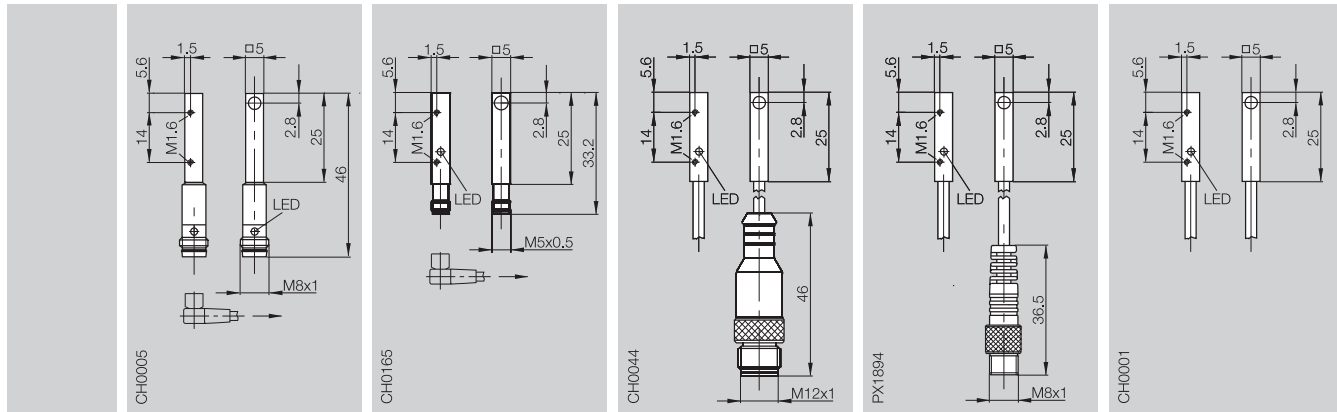

1.1

|                        |                       |                                |                                |                          |
|------------------------|-----------------------|--------------------------------|--------------------------------|--------------------------|
| BES 516-3040-I02-C-S49 | BES Q05AC-PSC08B-S26G | BES 516-3040-I02-C-S4-00,3     | BES 516-3040-I02-C-S49-00,3    | BES 516-3040-I02-C-PU-02 |
| BES 516-3042-I02-C-S49 | BES Q05AC-POC08B-S26G |                                |                                | BES 516-3042-I02-C-PU-02 |
| BES 516-3041-I02-C-S49 | BES Q05AC-NSC08B-S26G |                                |                                | BES 516-3041-I02-C-PU-02 |
| BES 516-3043-I02-C-S49 | BES Q05AC-NOC08B-S26G |                                |                                | BES 516-3043-I02-C-PU-02 |
| 10...30 V DC           | 10...30 V DC          | 10...30 V DC                   | 10...30 V DC                   | 10...30 V DC             |
| ≤ 2.5 V                | ≤ 2.5 V               | ≤ 2.5 V                        | ≤ 2.5 V                        | ≤ 2.5 V                  |
| 75 V DC                | 75 V DC               | 75 V DC                        | 75 V DC                        | 75 V DC                  |
| 100 mA                 | 100 mA                | 100 mA                         | 100 mA                         | 100 mA                   |
| ≤ 12 mA                | ≤ 10 mA               | ≤ 10 mA                        | ≤ 10 mA                        | ≤ 12 mA                  |
| yes                    | yes                   | yes                            | yes                            | yes                      |
| yes                    | yes                   | yes                            | yes                            | yes                      |
| ≤ 5 %                  | ≤ 5 %                 | ≤ 5 %                          | ≤ 5 %                          | ≤ 5 %                    |
| -25...+70 °C           | -25...+70 °C          | -25...+70 °C                   | -25...+70 °C                   | -25...+70 °C             |
| 3000 Hz                | 3000 Hz               | 1000 Hz                        | 3000 Hz                        | 3000 Hz                  |
| DC 13                  | DC 13                 | DC 13                          | DC 13                          | DC 13                    |
| yes                    | yes                   | yes                            | yes                            | yes                      |
| IP 67                  | IP 67                 | IP 65                          | IP 67                          | IP 67                    |
| anodized Al            | anodized Al           | anodized Al                    | anodized Al                    | anodized Al              |
| POM                    | POM                   | POM                            | POM                            | POM                      |
| Connector              | Connector             | 0.3 m PUR cable with connector | 0.3 m PUR cable with connector | 2 m cable PUR            |
| cULus                  | cULus                 | cULus                          | cULus                          | 3x0.14 mm <sup>2</sup>   |
| BKS- 48/BKS- 49        | BKS- 25/BKS- 26       | BKS- 19                        | BKS- 48                        | cULus                    |







5

Connectors,  
Holders ...  
Page 5.2 ...

## Inductive Sensors

DC 3-wire  
Block style housings  
 $s_n$  1.5 mm

| Housing size                            | 8×16×4 mm R04 | 8×16×4 mm R04 | 8×16×4 mm R04 | 8×16×4 mm R04 |
|-----------------------------------------|---------------|---------------|---------------|---------------|
| Mounting (see notes starting p. 1.0.11) | flush         | flush         | flush         | flush         |
| Rated operating distance $s_n$          | 1.5 mm        | 1.5 mm        | 1.5 mm        | 1.5 mm        |
| Assured operating distance $s_a$        | 0...1.2 mm    | 0...1.2 mm    | 0...1.2 mm    | 0...1.2 mm    |

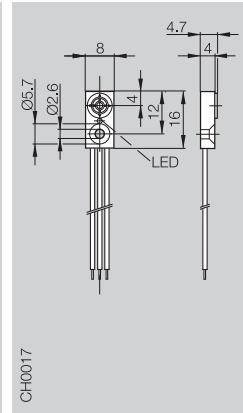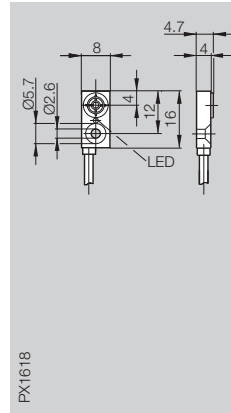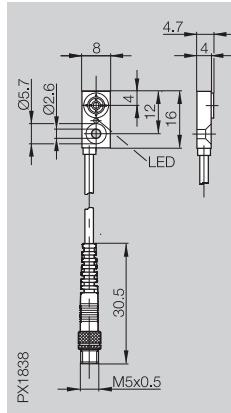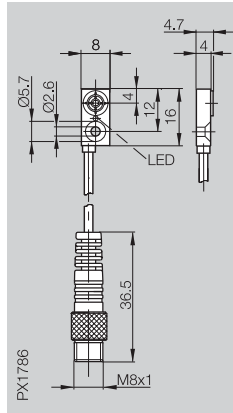

|                                    |                                 |   |                               |                              |                       |                         |
|------------------------------------|---------------------------------|---|-------------------------------|------------------------------|-----------------------|-------------------------|
| PNP                                | NO                              | ① | BES R04KC-PSC15B-EP00,13-GS49 | BES R04KC-PSC15B-EP00,2-GS26 | BES R04KC-PSC15B-EV02 | BES R04KC-PSC15B-LV00,3 |
|                                    | NC                              | ② | BES R04KC-POC15B-EP00,13-GS49 | BES R04KC-POC15B-EP00,2-GS26 | BES R04KC-POC15B-EV02 |                         |
| NPN                                | NO                              | ④ | BES R04KC-NSC15B-EP00,13-GS49 | BES R04KC-NSC15B-EP00,2-GS26 | BES R04KC-NSC15B-EV02 |                         |
|                                    | NC                              | ⑤ | BES R04KC-NOC15B-EP00,13-GS49 | BES R04KC-NOC15B-EP00,2-GS26 | BES R04KC-NOC15B-EV02 |                         |
| Supply voltage $U_B$               | 10...30 V DC                    |   |                               |                              |                       |                         |
| Voltage drop $U_d$ at $I_e$        | ≤ 3 V                           |   |                               |                              |                       |                         |
| Rated insulation voltage $U_i$     | 75 V DC                         |   |                               |                              |                       |                         |
| Rated operational current $I_e$    | 100 mA                          |   |                               |                              |                       |                         |
| No-load supply current $I_0$ max.  | ≤ 12 mA                         |   |                               |                              |                       |                         |
| Polarity reversal protected        | no                              |   |                               |                              |                       |                         |
| Short circuit protected            | yes                             |   |                               |                              |                       |                         |
| Repeat accuracy R                  | ≤ 5 %                           |   |                               |                              |                       |                         |
| Ambient temperature range $T_a$    | -25...+70 °C                    |   |                               |                              |                       |                         |
| Switching frequency f              | 600 Hz                          |   |                               |                              |                       |                         |
| Utilization category               | DC 12                           |   |                               |                              |                       |                         |
| Function indicator                 | yes                             |   |                               |                              |                       |                         |
| Degree of protection per IEC 60529 | IP 67                           |   |                               |                              |                       |                         |
| Housing material                   | PA 6                            |   |                               |                              |                       |                         |
| Material of sensing face           | PA 6                            |   |                               |                              |                       |                         |
| Connection                         | 0.13 m PUR cable with connector |   |                               |                              |                       |                         |
| No. of wires × cross-section       | 3×0.09 mm <sup>2</sup>          |   |                               |                              |                       |                         |
| Approval                           | cULus                           |   |                               |                              |                       |                         |
| Recommended connector              | BKS-_ 48                        |   |                               |                              |                       |                         |

① Wiring diagrams see page 1.0.6





Other cable lengths on request.




# 8×16×4 mm, 10×30×6 mm

## Inductive Sensors


DC 3-wire  
Block style housings  
s<sub>n</sub> 2.5 mm, 3 mm
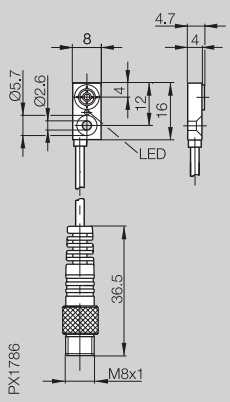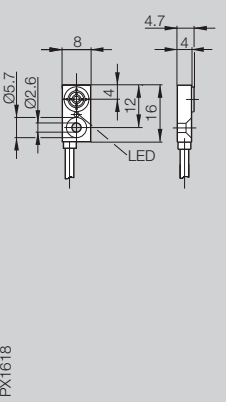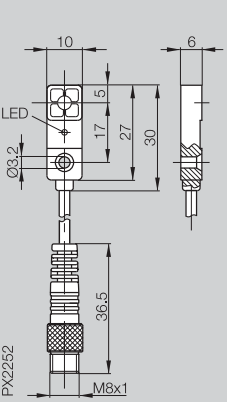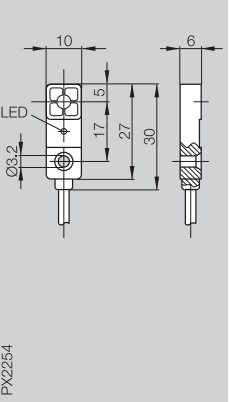
| 8×16×4 mm R04<br>non-flush<br>2.5 mm<br>0...2 mm                                  | 8×16×4 mm R04<br>non-flush<br>2.5 mm<br>0...2 mm                                  |  | 10×30×6 mm R03<br>flush<br>3 mm<br>0...2.4 mm                                      | 10×30×6 mm R03<br>flush<br>3 mm<br>0...2.4 mm                                       |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |
| BES R04KC-PSC25F-EP00,3-GS49                                                      | BES R04KC-PSC25F-EV02                                                             |  | BES R03KC-PSC30B-BP00,3-GS49                                                       | BES R03KC-PSC30B-EP02<br>BES R03KC-POC30B-EP05                                      |
|                                                                                   |                                                                                   |  |                                                                                    | BES R03KC-NSC30B-EP05<br>BES R03KC-NOC30B-EP05                                      |
| 10...30 V DC<br>≤ 2.5 V<br>75 V DC<br>100 mA<br>≤ 10 mA<br>no<br>yes              | 10...30 V DC<br>≤ 2.5 V<br>75 V DC<br>100 mA<br>≤ 10 mA<br>no<br>yes              |  | 5...30 V DC<br>≤ 1.5 V<br>75 V DC<br>100 mA<br>≤ 6 mA<br>no<br>yes                 | 5...30 V DC<br>≤ 1.5 V<br>75 V DC<br>100 mA<br>≤ 6 mA<br>no<br>yes                  |
| ≤ 5 %<br>-25...+70 °C<br>150 Hz<br>DC 12<br>yes                                   | ≤ 5 %<br>-25...+70 °C<br>150 Hz<br>DC 12<br>yes                                   |  | ≤ 1 %<br>-25...+70 °C<br>1000 Hz<br>DC 12<br>yes                                   | ≤ 1 %<br>-25...+70 °C<br>1000 Hz<br>DC 12<br>yes                                    |
| IP 67                                                                             | IP 67                                                                             |  | IP 67                                                                              | IP 67                                                                               |
| PA 6<br>PA 6                                                                      | PA 6<br>PA 6                                                                      |  | PA 6<br>PA 6                                                                       | PA 6<br>PA 6                                                                        |
| 0.3 m PUR cable with connector                                                    | 2 m PVC cable                                                                     |  | 0.3 m PUR cable with connector                                                     | 2 m/5 m PUR cable                                                                   |
| 3×0.09 mm <sup>2</sup>                                                            | 3×0.09 mm <sup>2</sup>                                                            |  | 3×0.14 mm <sup>2</sup>                                                             | 3×0.14 mm <sup>2</sup>                                                              |
| cULus<br>BKS-_ 48                                                                 | cULus                                                                             |  | cULus<br>BKS-_ 48                                                                  | cULus                                                                               |

**Mounting bracket  
BES R04-MF-01 for  
BES R04... with s<sub>n</sub> 1.5 mm**  
please order separately  
M2.5 not  
included

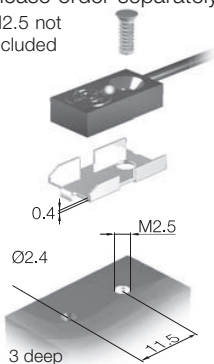

**Installation note for  
BES R04... with s<sub>n</sub> 2.5 mm**  
Aluminum: full flush  
mountable  
Steel: surrounding  
1.5 mm clear zone







1.1

5

Connectors ...  
page 5.2 ...

|                                         |                  |                  |                  |                  |  |
|-----------------------------------------|------------------|------------------|------------------|------------------|--|
| Housing size                            | <b>8x8x59 mm</b> | <b>8x8x59 mm</b> | <b>8x8x44 mm</b> | <b>8x8x44 mm</b> |  |
| Mounting (see notes starting p. 1.0.11) | flush            | flush            | flush            | flush            |  |
| Rated operating distance $s_n$          | <b>1.5 mm</b>    | <b>1.5 mm</b>    | <b>1.5 mm</b>    | <b>1.5 mm</b>    |  |
| Assured operating distance $s_a$        | 0...1.2 mm       | 0...1.2 mm       | 0...1.2 mm       | 0...1.2 mm       |  |

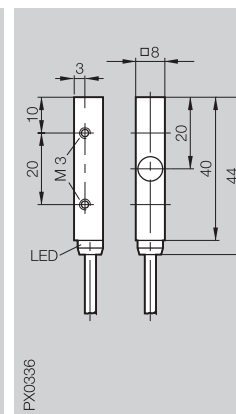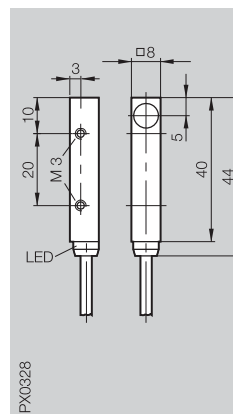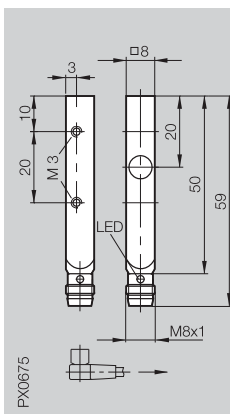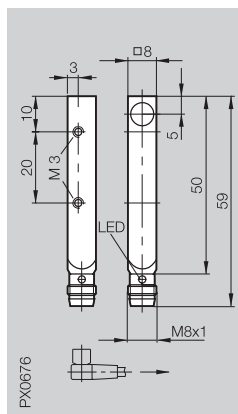

|                                     |                 |   |                      |                      |                        |                        |  |
|-------------------------------------|-----------------|---|----------------------|----------------------|------------------------|------------------------|--|
| PNP                                 | NO              | ① | BES 516-300-S166-S49 | BES 516-300-S202-S49 | BES 516-300-S166-02    | BES 516-300-S202-02    |  |
|                                     | NC              | ② | BES 516-300-S180-S49 |                      | BES 516-300-S180-02    |                        |  |
| NPN                                 | NO              | ④ | BES 516-300-S170-S49 | BES 516-300-S254-S49 | BES 516-300-S170-02    |                        |  |
|                                     | NC              | ⑤ |                      |                      |                        |                        |  |
| Supply voltage $U_B$                | 10...30 V DC    |   | 10...30 V DC         | 10...30 V DC         | 10...30 V DC           | 10...30 V DC           |  |
| Voltage drop $U_d$ at $I_e$         | $\leq 2.5$ V    |   | $\leq 2.5$ V         | $\leq 2.5$ V         | $\leq 2.5$ V           | $\leq 2.5$ V           |  |
| Rated insulation voltage $U_i$      | 75 V DC         |   | 75 V DC              | 75 V DC              | 75 V DC                | 75 V DC                |  |
| Rated operational current $I_e$     | 200 mA          |   | 200 mA               | 200 mA               | 200 mA                 | 200 mA                 |  |
| No-load supply current $I_0$ max.   | $\leq 15$ mA    |   | $\leq 15$ mA         | $\leq 15$ mA         | $\leq 15$ mA           | $\leq 12$ mA           |  |
| Polarity reversal protected         | yes             |   | yes                  | yes                  | yes                    | yes                    |  |
| Short circuit protected             | yes             |   | yes                  | yes                  | yes                    | yes                    |  |
| Repeat accuracy R                   | $\leq 5$ %      |   | $\leq 5$ %           | $\leq 5$ %           | $\leq 5$ %             | $\leq 5$ %             |  |
| Ambient temperature range $T_a$     | $-25...+70$ °C  |   | $-25...+70$ °C       | $-25...+70$ °C       | $-25...+70$ °C         | $-25...+70$ °C         |  |
| Switching frequency f               | 5000 Hz         |   | 5000 Hz              | 5000 Hz              | 5000 Hz                | 5000 Hz                |  |
| Utilization category                | DC 13           |   | DC 13                | DC 13                | DC 13                  | DC 13                  |  |
| Function indicator                  | yes             |   | yes                  | yes                  | yes                    | yes                    |  |
| Degree of protection per IEC 60529  | IP 67           |   | IP 67                | IP 67                | IP 67                  | IP 67                  |  |
| Housing material                    | GD-Zn coated    |   | GD-Zn coated         | GD-Zn coated         | GD-Zn coated           | GD-Zn coated           |  |
| Material of sensing face            | POM             |   | POM                  | POM                  | POM                    | POM                    |  |
| Connection                          | Connector       |   | Connector            | Connector            | 2 m PVC cable          | 2 m PVC cable          |  |
| No. of wires $\times$ cross-section |                 |   |                      |                      | 3x0.14 mm <sup>2</sup> | 3x0.14 mm <sup>2</sup> |  |
| Approval                            | cULus           |   | cULus                | cULus                | cULus                  | cULus                  |  |
| Recommended connector               | BKS- 48/BKS- 49 |   | BKS- 48/BKS- 49      | BKS- 48/BKS- 49      |                        |                        |  |

① Wiring diagrams see page 1.0.6  
Switching distance ■■ see page 1.0.10

For sensors with cable, other lengths and PUR quality are available on request.










# 8x8x59 mm, 8x8x44 mm

## Inductive Sensors

DC 3-wire  
Block style housings  
s<sub>n</sub> 2 mm, 2.5 mm
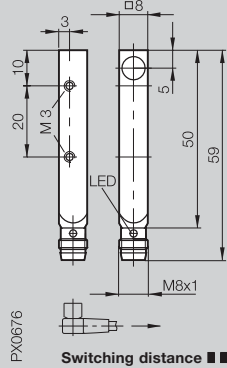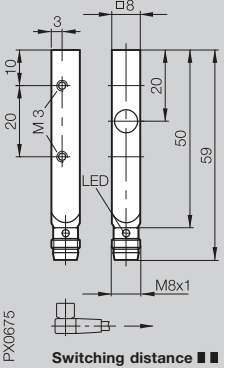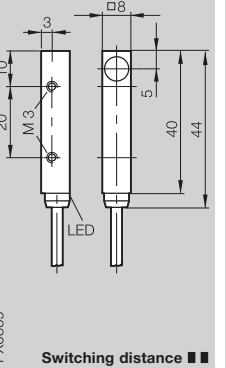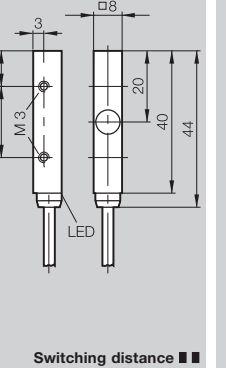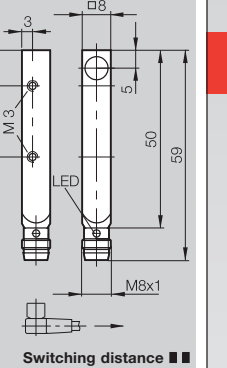
| 8x8x59 mm<br>flush<br>2 mm<br>0...1.6 mm                                          | 8x8x59 mm<br>flush<br>2 mm<br>0...1.6 mm                                          | 8x8x44 mm<br>flush<br>2 mm<br>0...1.6 mm                                          | 8x8x44 mm<br>flush<br>2 mm<br>0...1.6 mm                                           | 8x8x59 mm<br>flush<br>2.5 mm<br>0...2 mm                                            |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |
| BES Q08ZC-PSC20B-S49G<br>BES Q08ZC-POC20B-S49G                                    | BES Q08ZE-PSC20B-S49G<br>BES Q08ZE-POC20B-S49G                                    | BES Q08ZC-PSC20B-BV02<br>BES Q08ZC-POC20B-BV02                                    | BES Q08ZE-PSC20B-BV02<br>BES Q08ZE-POC20B-BV02                                     | BES Q08ZC-PSC25B-S49G                                                               |
| BES Q08ZC-NSC20B-S49G<br>BES Q08ZC-NOC20B-S49G                                    | BES Q08ZE-NSC20B-S49G<br>BES Q08ZE-NOC20B-S49G                                    | BES Q08ZC-NSC20B-BV02<br>BES Q08ZC-NOC20B-BV02                                    | BES Q08ZE-NSC20B-BV02                                                              |                                                                                     |
| 10...30 V DC<br>≤ 2.5 V<br>75 V DC<br>200 mA<br>≤ 15 mA<br>yes<br>yes             | 10...30 V DC<br>≤ 2.5 V<br>75 V DC<br>200 mA<br>≤ 15 mA<br>yes<br>yes             | 10...30 V DC<br>≤ 2.5 V<br>75 V DC<br>200 mA<br>≤ 15 mA<br>yes<br>yes             | 10...30 V DC<br>≤ 2.5 V<br>75 V DC<br>200 mA<br>≤ 15 mA<br>yes<br>yes              | 10...30 V DC<br>≤ 2.5 V<br>75 V DC<br>200 mA<br>≤ 12 mA<br>yes<br>yes               |
| ≤ 5 %<br>-25...+70 °C<br>3000 Hz<br>DC 13<br>yes                                  | ≤ 5 %<br>-25...+70 °C<br>3000 Hz<br>DC 13<br>yes                                  | ≤ 5 %<br>-25...+70 °C<br>3000 Hz<br>DC 13<br>yes                                  | ≤ 5 %<br>-25...+70 °C<br>3000 Hz<br>DC 13<br>yes                                   | ≤ 5 %<br>-25...+70 °C<br>2000 Hz<br>DC 13<br>yes                                    |
| IP 67                                                                             | IP 67                                                                             | IP 67                                                                             | IP 67                                                                              | IP 67                                                                               |
| GD-Zn coated<br>POM<br>Connector                                                  | GD-Zn coated<br>POM<br>Connector                                                  | GD-Zn coated<br>POM<br>2 m PVC cable<br>3x0.14 mm <sup>2</sup><br>cULus           | GD-Zn coated<br>POM<br>2 m PVC cable<br>3x0.14 mm <sup>2</sup><br>cULus            | GD-Zn coated<br>POM<br>Connector<br>cULus<br>BKS- 48/BKS- 49                        |



1.1

5





Connectors ...  
page 5.2 ...

## Inductive Sensors

DC 3-wire  
Block style housings  
s<sub>n</sub> 2.5 mm, 3 mm

8x8x59 mm

|                                           |                  |                  |  |  |  |
|-------------------------------------------|------------------|------------------|--|--|--|
| Housing size                              | <b>8x8x59 mm</b> | <b>8x8x59 mm</b> |  |  |  |
| Mounting (see notes starting p. 1.0.11)   | flush            | quasi flush      |  |  |  |
| Rated operating distance s <sub>n</sub>   | <b>2.5 mm</b>    | <b>3 mm</b>      |  |  |  |
| Assured operating distance s <sub>a</sub> | 0...2 mm         | 0...2.4 mm       |  |  |  |

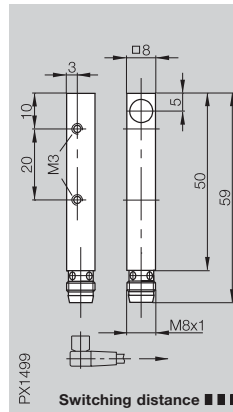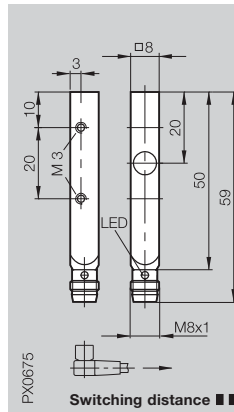

|                                               |                   |   |                       |                       |  |  |  |
|-----------------------------------------------|-------------------|---|-----------------------|-----------------------|--|--|--|
| PNP                                           | NO                | ① | BES Q08ZE-PSC25B-S49G | BES Q08MG-PSC30B-S49G |  |  |  |
|                                               | NC                | ② |                       |                       |  |  |  |
| NPN                                           | NO                | ④ |                       | BES Q08MG-NSC30B-S49G |  |  |  |
|                                               | NC                | ⑤ |                       |                       |  |  |  |
| Supply voltage U <sub>B</sub>                 | 10...30 V DC      |   | 10...30 V DC          |                       |  |  |  |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 2.5 V           |   | ≤ 2 V                 |                       |  |  |  |
| Rated insulation voltage U <sub>i</sub>       | 75 V DC           |   | 75 V DC               |                       |  |  |  |
| Rated operational current I <sub>e</sub>      | 200 mA            |   | 200 mA                |                       |  |  |  |
| No-load supply current I <sub>0</sub> max.    | ≤ 12 mA           |   | ≤ 10 mA               |                       |  |  |  |
| Polarity reversal protected                   | yes               |   | yes                   |                       |  |  |  |
| Short circuit protected                       | yes               |   | yes                   |                       |  |  |  |
| Repeat accuracy R                             | ≤ 5 %             |   | ≤ 5 %                 |                       |  |  |  |
| Ambient temperature range T <sub>a</sub>      | -25...+70 °C      |   | -25...+70 °C          |                       |  |  |  |
| Switching frequency f                         | 2000 Hz           |   | 1000 Hz               |                       |  |  |  |
| Utilization category                          | DC 13             |   | DC 13                 |                       |  |  |  |
| Function indicator                            | yes               |   | yes                   |                       |  |  |  |
| Degree of protection per IEC 60529            | IP 67             |   | IP 67                 |                       |  |  |  |
| Housing material                              | CuZn coated       |   | CuZn coated           |                       |  |  |  |
| Material of sensing face                      | POM               |   | PBT                   |                       |  |  |  |
| Connection                                    | Connector         |   | Connector             |                       |  |  |  |
| No. of wires × cross-section                  |                   |   |                       |                       |  |  |  |
| Approval                                      | cULus             |   |                       |                       |  |  |  |
| Recommended connector                         | BKS-_ 48/BKS-_ 49 |   | BKS-_ 48/BKS-_ 49     |                       |  |  |  |

① Wiring diagrams see page 1.0.6

Switching distance ■ ■ see page 1.0.10

For sensors with cable, other lengths and PUR quality are available on request.

For sensors with cable and connector, other lengths are available on request.



→ Connector orientation








# 16.5×30×10.5 mm

## Inductive Sensors

DC 3-wire  
Block style housings  
s<sub>n</sub> 2 mm

1.1
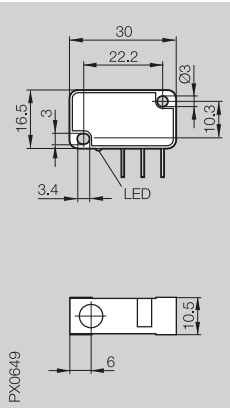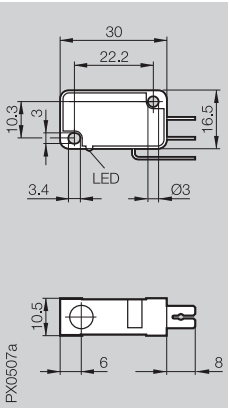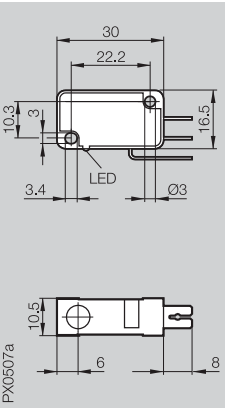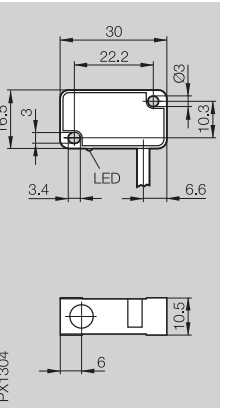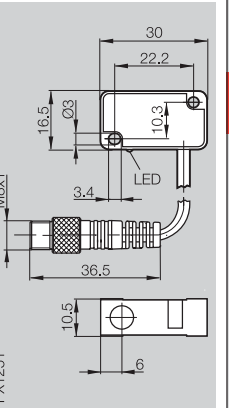
| 16.5×30×10.5 mm Minisensor<br>flush<br>2 mm<br>0...1.6 mm                         | 16.5×30×10.5 mm Minisensor<br>flush<br>2 mm<br>0...1.6 mm                         | 16.5×30×10.5 mm Minisensor<br>flush<br>2 mm<br>0...1.6 mm                         | 16.5×30×10.5 mm Minisensor<br>flush<br>2 mm<br>0...1.6 mm                          | 16.5×30×10.5 mm Minisensor<br>flush<br>2 mm<br>0...1.6 mm                           |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |
| BES 517-398-N1-C<br>BES 517-351-N1-C                                              | BES 517-398-N2-C<br>BES 517-351-N2-C                                              | BES 517-351-SA2-C                                                                 | BES 517-398-N0-C-03<br>BES 517-351-N0-C-03                                         | BES 517-398-N0-C-S49-00,2<br>BES 517-351-N0-C-S49-00,32                             |
| BES 517-399-N1-C<br>BES 517-352-N1-C                                              | BES 517-399-N2-C<br>BES 517-352-N2-C                                              |                                                                                   | BES 517-399-N0-C-03<br>BES 517-352-N0-C-03                                         | BES 517-399-N0-C-S49-00,2                                                           |
| 10...30 V DC<br>≤ 2 V<br>75 V DC<br>200 mA<br>≤ 10 mA<br>yes<br>yes               | 10...30 V DC<br>≤ 2 V<br>75 V DC<br>200 mA<br>≤ 10 mA<br>yes<br>yes               | 10...30 V DC<br>≤ 2 V<br>75 V DC<br>200 mA<br>≤ 10 mA<br>yes<br>yes               | 10...30 V DC<br>≤ 2 V<br>75 V DC<br>200 mA<br>≤ 10 mA<br>yes<br>yes                | 10...30 V DC<br>≤ 2 V<br>75 V DC<br>200 mA<br>≤ 10 mA<br>yes<br>yes                 |
| ≤ 5 %<br>-25...+70 °C<br>2500 Hz<br>DC 13<br>yes                                  | ≤ 5 %<br>-25...+70 °C<br>2500 Hz<br>DC 13<br>yes                                  | ≤ 5 %<br>-25...+70 °C<br>2500 Hz<br>DC 13<br>yes                                  | ≤ 5 %<br>-25...+70 °C<br>2500 Hz<br>DC 13<br>yes                                   | ≤ 5 %<br>-25...+70 °C<br>2500 Hz<br>DC 13<br>yes                                    |
| Housing IP 65/Connector IP 00                                                     | Housing IP 65/Connector IP 00                                                     | Housing IP 65/Connector IP 00                                                     | IP 65                                                                              | IP 65                                                                               |
| PBT<br>PBT<br>Flat connector DIN 46244                                            | PBT<br>PBT<br>Flat connector DIN 46244                                            | PBT<br>PBT<br>Flat connector DIN 46244                                            | PBT<br>PBT<br>3 m PVC cable                                                        | PBT<br>PBT<br>0.2 m/0.32 m PUR cable with connector                                 |
|                                                                                   |                                                                                   |                                                                                   | 3×0.14 mm <sup>2</sup>                                                             |                                                                                     |
|                                                                                   |                                                                                   |                                                                                   |                                                                                    | BKS-_ 48                                                                            |


Special pin configuration



5

Connectors ...  
page 5.2 ...

|                                         |                    |  |  |
|-----------------------------------------|--------------------|--|--|
| Housing size                            | <b>30×20×10 mm</b> |  |  |
| Mounting (see notes starting p. 1.0.11) | flush              |  |  |
| Rated operating distance $s_n$          | <b>2 mm</b>        |  |  |
| Assured operating distance $s_a$        | 0...1.6 mm         |  |  |

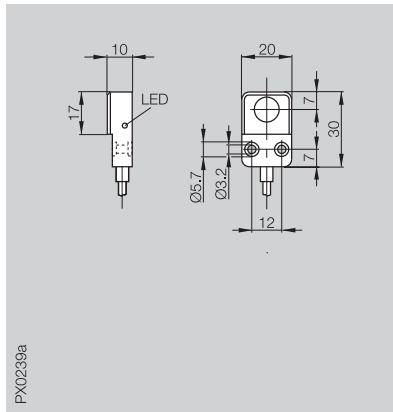

|                                    |                 |                  |  |
|------------------------------------|-----------------|------------------|--|
| PNP                                | NO ①            | BES 516-300-S279 |  |
|                                    | complementary ③ |                  |  |
| NPN                                | NO ④            | BES 516-300-S255 |  |
|                                    | complementary ⑥ |                  |  |
| Supply voltage $U_B$               | 10...30 V DC    |                  |  |
| Voltage drop $U_d$ at $I_e$        | ≤ 0.5 V         |                  |  |
| Rated insulation voltage $U_i$     | 75 V DC         |                  |  |
| Rated operational current $I_e$    | 50 mA           |                  |  |
| No-load supply current $I_0$ max.  | ≤ 25 mA         |                  |  |
| Polarity reversal protected        | yes             |                  |  |
| Short circuit protected            | no              |                  |  |
| Repeat accuracy R                  | ≤ 10 %          |                  |  |
| Ambient temperature range $T_a$    | -25...+70 °C    |                  |  |
| Switching frequency f              | 1500 Hz         |                  |  |
| Utilization category               | DC 13           |                  |  |
| Function/Supply voltage indicator  | yes/no          |                  |  |
| Degree of protection per IEC 60529 | IP 65           |                  |  |
| Housing material                   | Anodized GD-Al  |                  |  |
| Material of sensing face           | PBT             |                  |  |
| Connection                         | 5 m PVC cable   |                  |  |
| No. of wires × cross-section       | 3×0.14 mm²      |                  |  |
| Approval                           |                 |                  |  |
| Recommended connector              |                 |                  |  |

① Wiring diagrams see page 1.0.6

For sensors with cable, other lengths are available on request.

For sensors with cable and connector, other lengths are available on request.



# 20x32x8 mm




## Inductive Sensors

DC 3-/4-wire  
Block style housings  
s<sub>n</sub> 7 mm

**20x32x8 mm R01**  
flush  
**7 mm**  
0...5.7 mm

**20x32x8 mm R01**  
flush  
**7 mm**  
0...5.7 mm

**20x32x8 mm R01**  
flush  
**7 mm**  
0...5.7 mm

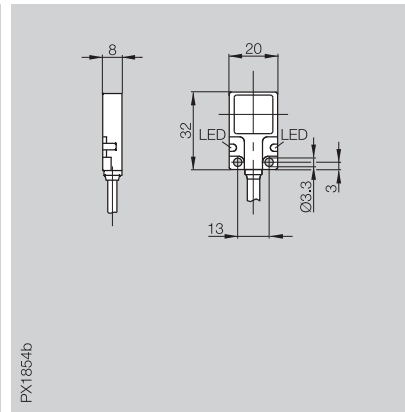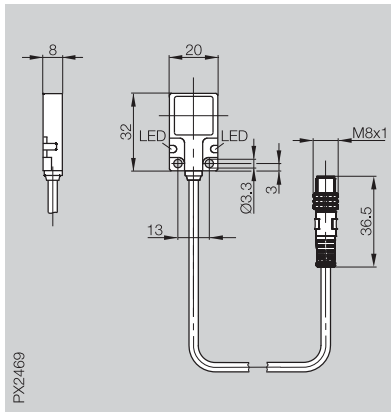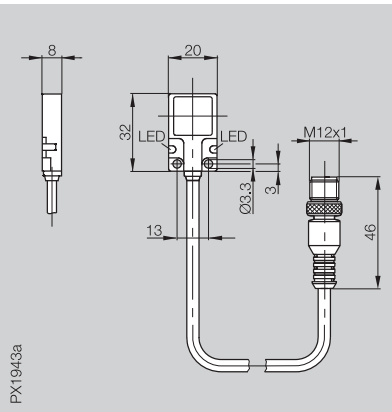

**1.1**

BES R01ZC-PAC70B-BP00.2-GS04

BES R01ZC-PSC70B-BP00.3-GS49

BES R01ZC-PAC70B-BP03

BES R01ZC-NAC70B-BP05

10...30 V DC  
≤ 2.5 V  
75 V DC  
200 mA  
≤ 15 mA  
yes  
yes

10...30 V DC  
≤ 2.5 V  
75 V DC  
200 mA  
≤ 15 mA  
yes  
yes

10...30 V DC  
≤ 2.5 V  
75 V DC  
200 mA  
≤ 15 mA  
yes  
yes

≤ 5 %  
-25...+70 °C  
150 Hz  
DC 13  
yes/yes

≤ 5 %  
-25...+70 °C  
150 Hz  
DC 13  
yes/yes

≤ 5 %  
-25...+70 °C  
150 Hz  
DC 13  
yes/yes

IP 67

IP 67

IP 67

GD-Zn  
PA 12

GD-Zn  
PA 12

GD-Zn  
PA 12

0.2 m PUR cable with connector


0.3 m PUR cable with connector

3 m/5 m PUR cable  
4x0.14 mm<sup>2</sup>

cULus  
BKS\_ 19

cULus  
BKS\_ 48

cULus



### Mounting set BES R01-FK-1

consisting of:  
2 cheese-head screws DIN 912 M3x12  
2 spacers Ø5xØ3.3x3.7  
1 angled screwdriver DIN 911, 2.5 mm

Please order separately!






**5**

Connectors ...  
page 5.2 ...

# Inductive Sensors

DC 3-wire  
Block style housings  
s<sub>n</sub> 2 mm

|                                           |                        |                        |                        |
|-------------------------------------------|------------------------|------------------------|------------------------|
| Housing size                              | <b>26×40×12 mm</b> R05 | <b>26×40×12 mm</b> R05 | <b>26×40×12 mm</b> R05 |
| Mounting (see notes starting p. 1.0.11)   | flush                  | flush                  | flush                  |
| Rated operating distance s <sub>n</sub>   | <b>2 mm</b>            | <b>2 mm</b>            | <b>2 mm</b>            |
| Assured operating distance s <sub>a</sub> | 0...1.6 mm             | 0...1.6 mm             | 0...1.6 mm             |

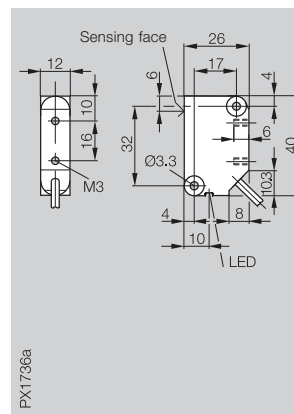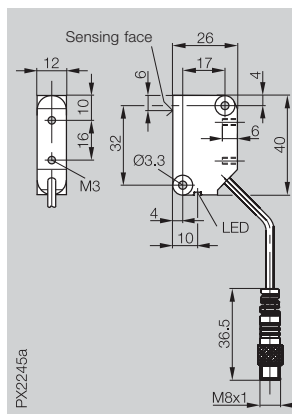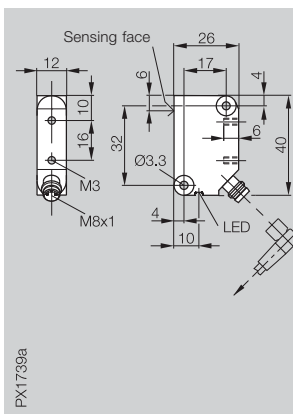

|                                               |                   |   |                                |                                |                        |
|-----------------------------------------------|-------------------|---|--------------------------------|--------------------------------|------------------------|
| PNP                                           | NO                | ① | BES R05KB-PSC20B-S49A          | BES R05KB-PSC20B-BP00,3-GS49   | BES R05KB-PSC20B-EP02  |
|                                               | NC                | ② |                                |                                |                        |
| NPN                                           | NO                | ④ |                                |                                |                        |
|                                               | NC                | ⑤ |                                |                                |                        |
| Supply voltage U <sub>B</sub>                 | 10...30 V DC      |   | 10...30 V DC                   | 10...30 V DC                   | 10...30 V DC           |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 2.5 V           |   | ≤ 2.5 V                        | ≤ 2.5 V                        | ≤ 2.5 V                |
| Rated insulation voltage U <sub>i</sub>       | 75 V DC           |   | 75 V DC                        | 75 V DC                        | 250 V AC               |
| Rated operational current I <sub>e</sub>      | 200 mA            |   | 200 mA                         | 200 mA                         | 200 mA                 |
| No-load supply current I <sub>0</sub> max.    | ≤ 9 mA            |   | ≤ 9 mA                         | ≤ 9 mA                         | ≤ 9 mA                 |
| Polarity reversal protected                   | yes               |   | yes                            | yes                            | yes                    |
| Short circuit protected                       | yes               |   | yes                            | yes                            | yes                    |
| Repeat accuracy R                             | ≤ 5 %             |   | ≤ 5 %                          | ≤ 5 %                          | ≤ 5 %                  |
| Ambient temperature range T <sub>a</sub>      | -25...+70 °C      |   | -25...+70 °C                   | -25...+70 °C                   | -25...+70 °C           |
| Switching frequency f                         | 400 Hz            |   | 400 Hz                         | 400 Hz                         | 400 Hz                 |
| Utilization category                          | DC 13             |   | DC 13                          | DC 13                          | DC 13                  |
| Function/Supply voltage indicator             | yes/no            |   | yes/no                         | yes/no                         | yes/no                 |
| Degree of protection per IEC 60529            | IP 67             |   | IP 67                          | IP 67                          | IP 67                  |
| Insulation class                              |                   |   |                                |                                | □                      |
| Housing material                              | PA 12             |   | PA 12                          | PA 12                          | PA 12                  |
| Material of sensing face                      | PA 12             |   | PA 12                          | PA 12                          | PA 12                  |
| Connection                                    | Connector         |   | 0.3 m PUR cable with connector | 0.3 m PUR cable with connector | 2 m cable PUR          |
| No. of wires × cross-section                  |                   |   |                                |                                | 3×0.34 mm <sup>2</sup> |
| Approval                                      | cULus             |   | cULus                          | cULus                          | cULus                  |
| Recommended connector                         | BKS-_ 48/BKS-_ 49 |   | BKS-_ 48                       | BKS-_ 48                       |                        |

① Wiring diagrams see page 1.0.6


For sensors with cable, other lengths are available on request.

For sensors with cable and connector, other lengths are available on request.



Connector orientation

## Row mounting



- for s<sub>n</sub> 2 mm**  
– the sensors can be mounted without Distance A
- for s<sub>n</sub> 4 mm**  
– for plastics or without existing material in the space = Distance A at least 17 mm  
– for metal in the space = Distance A at least 12 mm

# 26×40×12 mm


## Inductive Sensors

DC 3-wire  
Block style housings  
s<sub>n</sub> 4 mm


**26×40×12 mm R05**  
flush  
**4 mm**  
0...3.2 mm

**26×40×12 mm R05**  
flush  
**4 mm**  
0...3.2 mm


**26×40×12 mm R05**  
flush  
**4 mm**  
0...3.2 mm



PX1739a

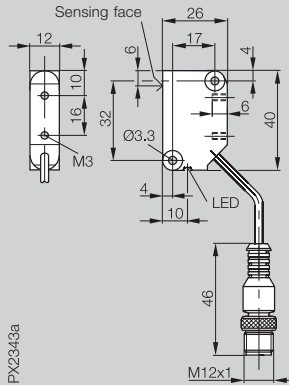

PX2343a



PX1736a

**1.1**

BES R05KB-PSC40B-S49A  
BES R05KB-POC40B-S49A

BES R05KB-PSC40B-EP00,3-GS04

BES R05KB-PSC40B-EV02

BES R05KB-NSC40B-S49A

BES R05KB-NOC40B-EV02

10...30 V DC  
≤ 2.5 V  
75 V DC  
200 mA  
≤ 9 mA  
yes  
yes

≤ 5 %  
-25...+70 °C  
400 Hz  
DC 13  
yes/no

IP 67  
PA 12  
PA 12  
Connector

cULus  
BKS-\_ 48/BKS-\_ 49

10...30 V DC  
≤ 2.5 V  
250 V AC  
200 mA  
≤ 9 mA  
yes  
yes

≤ 5 %  
-25...+70 °C  
400 Hz  
DC 13  
yes/no

IP 67  
PA 12  
PA 12  
0.3 m PUR cable with  
connector

cULus  
BKS-\_ 19

10...30 V DC  
≤ 2.5 V  
250 V AC  
200 mA  
≤ 9 mA  
yes  
yes

≤ 5 %  
-25...+70 °C  
400 Hz  
DC 13  
yes/no

IP 67  
PA 12  
PA 12  
2 m PVC cable

3×0.34 mm<sup>2</sup>  
cULus



**5**

Connectors ...  
page 5.2 ...







## Inductive Sensors

DC 3-wire  
Block style housings  
 $s_n$  3 mm, 5 mm

**17.5×17.3×28.5 mm, 25×50×10 mm**

| Housing size                            | 17.5×17.3×28.5 mm | 17.5×17.3×28.5 mm | 25×50×10 mm | 25×50×10 mm |
|-----------------------------------------|-------------------|-------------------|-------------|-------------|
| Mounting (see notes starting p. 1.0.11) | flush             | non-flush         | flush       | flush       |
| Rated operating distance $s_n$          | <b>3 mm</b>       | <b>5 mm</b>       | <b>5 mm</b> | <b>5 mm</b> |
| Assured operating distance $s_a$        | 0...2.4 mm        | 0...4.1 mm        | 0...4.1 mm  | 0...4.1 mm  |

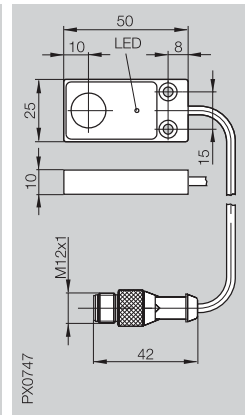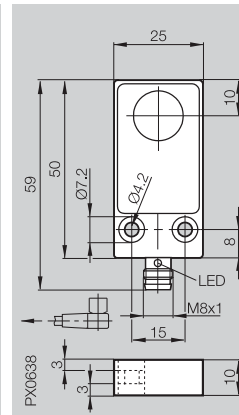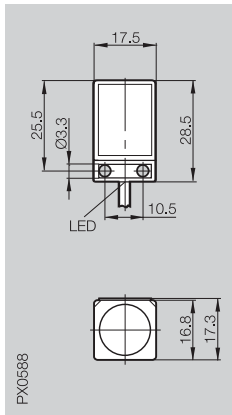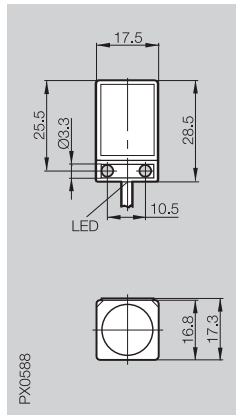

|                                    |                        |   |                        |                      |                                |                          |
|------------------------------------|------------------------|---|------------------------|----------------------|--------------------------------|--------------------------|
| PNP                                | NO                     | ① | BES 517-1603-QP-S-03   | BES 517-1605-QP-S-03 | BES 516-347-M0-C-S49           | BES 516-347-M0-C-S4-00,2 |
|                                    | complementary          | ③ |                        |                      |                                |                          |
| NPN                                | NO                     | ④ | BES 517-1603-QN-S-03   | BES 517-1605-QN-S-03 |                                |                          |
|                                    |                        |   |                        |                      |                                |                          |
| Supply voltage $U_B$               | 10...30 V DC           |   | 10...30 V DC           |                      | 10...30 V DC                   |                          |
| Voltage drop $U_d$ at $I_e$        | $\leq 1.8$ V           |   | $\leq 1.8$ V           |                      | $\leq 2.5$ V                   |                          |
| Rated insulation voltage $U_i$     | 75 V DC                |   | 75 V DC                |                      | 75 V DC                        |                          |
| Rated operational current $I_e$    | 50 mA                  |   | 50 mA                  |                      | 200 mA                         |                          |
| No-load supply current $I_0$ max.  | $\leq 20$ mA           |   | $\leq 20$ mA           |                      | $\leq 25$ mA                   |                          |
| Polarity reversal protected        | yes                    |   | yes                    |                      | yes                            |                          |
| Short circuit protected            | yes                    |   | yes                    |                      | yes                            |                          |
| Repeat accuracy R                  | $\leq 5$ %             |   | $\leq 5$ %             |                      | $\leq 5$ %                     |                          |
| Ambient temperature range $T_a$    | -25...+70 °C           |   | -25...+70 °C           |                      | -25...+70 °C                   |                          |
| Switching frequency f              | 500 Hz                 |   | 500 Hz                 |                      | 500 Hz                         |                          |
| Utilization category               | DC 13                  |   | DC 13                  |                      | DC 13                          |                          |
| Function indicator                 | yes                    |   | yes                    |                      | yes                            |                          |
| Degree of protection per IEC 60529 | IP 67                  |   | IP 67                  |                      | IP 65                          |                          |
| Housing material                   | AES/CP                 |   | AES/CP                 |                      | GD-AI                          |                          |
| Material of sensing face           | AES/CP                 |   | AES/CP                 |                      | PBT                            |                          |
| Connection                         | 3 m PVC cable          |   | 3 m PVC cable          |                      | Connector                      |                          |
| No. of wires × cross-section       | 3×0.14 mm <sup>2</sup> |   | 3×0.14 mm <sup>2</sup> |                      | 0.2 m PUR cable with connector |                          |
| Recommended connector              |                        |   |                        |                      | BKS- 48/BKS- 49                |                          |
|                                    |                        |   |                        |                      | BKS- 19                        |                          |

① Wiring diagrams see page 1.0.6

For sensors with cable, other lengths and PUR quality are available on request.

For sensors with cable and connector, other lengths are available on request.







Connector orientation

# 25x50x10 mm

## Inductive Sensors

DC 3-/4-wire  
Block style housings  
s<sub>n</sub> 5 mm
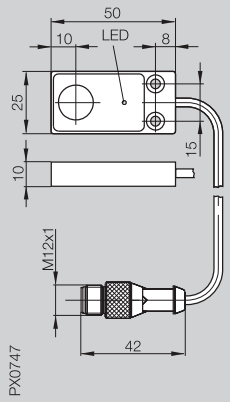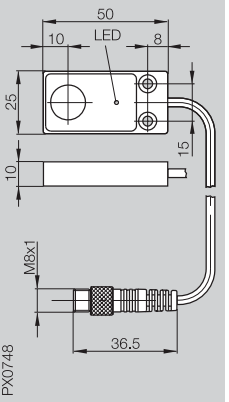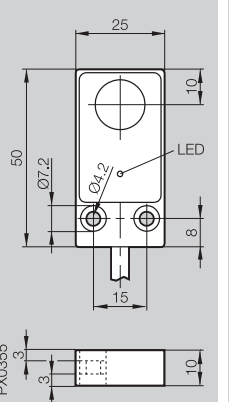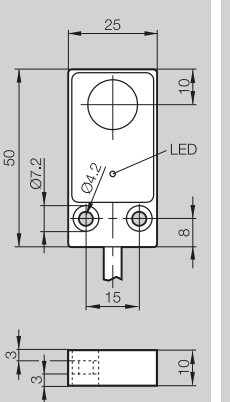
| 25x50x10 mm<br>flush<br>5 mm<br>0...4.1 mm                                        | 25x50x10 mm<br>flush<br>5 mm<br>0...4.1 mm                                        | 25x50x10 mm<br>flush<br>5 mm<br>0...4.1 mm                                        | 25x50x10 mm<br>flush<br>5 mm<br>0...4.1 mm                                         |  |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|--|
|  |  |  |  |  |
| BES 516-133-M0-C-S4-00,2                                                          | BES 516-347-M0-C-S49-00,2                                                         | BES 516-347-M0-C-02                                                               | BES 516-133-M0-C-02                                                                |  |
| 10...30 V DC<br>≤ 2.5 V<br>75 V DC<br>200 mA<br>≤ 32 mA<br>yes<br>yes             | 10...30 V DC<br>≤ 2.5 V<br>75 V DC<br>200 mA<br>≤ 25 mA<br>yes<br>yes             | 10...30 V DC<br>≤ 2.5 V<br>75 V DC<br>200 mA<br>≤ 25 mA<br>yes<br>yes             | 10...30 V DC<br>≤ 2.5 V<br>75 V DC<br>200 mA<br>≤ 32 mA<br>yes<br>yes              |  |
| ≤ 5 %<br>-25...+70 °C<br>500 Hz<br>DC 13<br>yes                                   | ≤ 5 %<br>-25...+70 °C<br>500 Hz<br>DC 13<br>yes                                   | ≤ 5 %<br>-25...+70 °C<br>500 Hz<br>DC 13<br>yes                                   | ≤ 5 %<br>-25...+70 °C<br>500 Hz<br>DC 13<br>yes                                    |  |
| IP 67                                                                             | IP 67                                                                             | IP 67                                                                             | IP 67                                                                              |  |
| GD-AI<br>PBT<br>0.2 m PUR cable with connector                                    | GD-AI<br>PBT<br>0.2 m PUR cable with connector                                    | GD-AI<br>PBT<br>2 m PVC cable                                                     | GD-AI<br>PBT<br>2 m PVC cable                                                      |  |
|                                                                                   |                                                                                   | 3x0.34 mm <sup>2</sup>                                                            | 4x0.25 mm <sup>2</sup>                                                             |  |
| BKS- _ 19                                                                         | BKS- _ 48                                                                         |                                                                                   |                                                                                    |  |



1.1

5




Connectors ...  
page 5.2 ...

# Inductive Sensors

DC 3-wire  
Block style housings  
s<sub>n</sub> 5 mm

42×48×22 mm

|                                           |                    |                    |                    |  |
|-------------------------------------------|--------------------|--------------------|--------------------|--|
| Housing size                              | <b>42×48×22 mm</b> | <b>42×48×22 mm</b> | <b>42×48×22 mm</b> |  |
| Mounting (see notes starting p. 1.0.11)   | flush              | flush              | flush              |  |
| Rated operating distance s <sub>n</sub>   | <b>5 mm</b>        | <b>5 mm</b>        | <b>5 mm</b>        |  |
| Assured operating distance s <sub>a</sub> | 0...4.1 mm         | 0...4.1 mm         | 0...4.1 mm         |  |

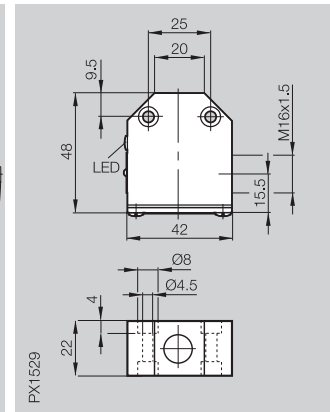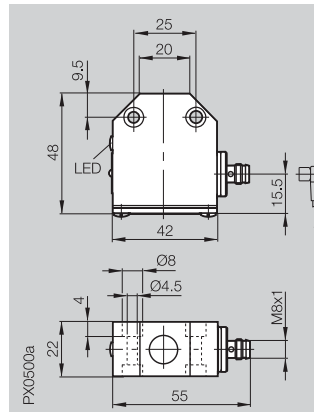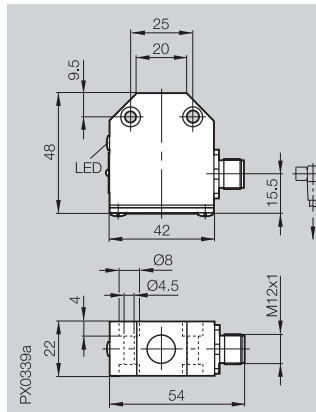

|                                               |                 |   |                     |                      |                           |
|-----------------------------------------------|-----------------|---|---------------------|----------------------|---------------------------|
| PNP                                           | NO              | ① | BES 516-346-H2-Y-S4 | BES 516-346-H2-Y-S49 | BES 516-346-H2-Y          |
|                                               | NC              | ② | BES 516-341-H2-Y-S4 |                      | BES 516-341-H2-Y          |
|                                               | complementary   | ③ |                     |                      |                           |
| NPN                                           | NO              | ④ |                     |                      | BES 516-344-H2-Y          |
|                                               | NC              | ⑤ |                     |                      | BES 516-340-H2-Y          |
|                                               | complementary   | ⑥ |                     |                      |                           |
| Supply voltage U <sub>B</sub>                 | 10...30 V DC    |   | 10...30 V DC        |                      | 10...30 V DC              |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 3.5 V         |   | ≤ 3.5 V             |                      | ≤ 3.5 V                   |
| Rated insulation voltage U <sub>i</sub>       | 75 V DC         |   | 75 V DC             |                      | 75 V DC                   |
| Rated operational current I <sub>e</sub>      | 130 mA          |   | 130 mA              |                      | 130 mA                    |
| No-load supply current I <sub>0</sub> max.    | ≤ 25 mA         |   | ≤ 25 mA             |                      | ≤ 25 mA                   |
| Polarity reversal protected                   | yes             |   | yes                 |                      | yes                       |
| Short circuit protected                       | yes             |   | yes                 |                      | yes                       |
| Repeat accuracy R                             | ≤ 5 %           |   | ≤ 5 %               |                      | ≤ 5 %                     |
| Ambient temperature range T <sub>a</sub>      | -25...+70 °C    |   | -25...+70 °C        |                      | -25...+70 °C              |
| Switching frequency f                         | 500 Hz          |   | 500 Hz              |                      | 500 Hz                    |
| Utilization category                          | DC 13           |   | DC 13               |                      | DC 13                     |
| Function indicator                            | yes             |   | yes                 |                      | yes                       |
| Degree of protection per IEC 60529            | IP 67           |   | IP 67               |                      | IP 67                     |
| Housing material                              | Anodized GD-Al  |   | Anodized GD-Al      |                      | Anodized GD-Al            |
| Material of sensing face                      | PA 12           |   | PA 12               |                      | PA 12                     |
| Connection                                    | Connector       |   | Connector           |                      | Screw terminals           |
| max. conductor cross-section                  |                 |   |                     |                      | up to 2.5 mm <sup>2</sup> |
| Recommended connector                         | BKS- 19/BKS- 20 |   | BKS- 48/BKS- 49     |                      |                           |

① Wiring diagrams see page 1.0.6



74×60.5×28 mm

Inductive  
Sensors


DC 4-wire  
Block style housings  
s<sub>n</sub> 7 mm

74×60.5×28 mm

flush

7 mm

0...5.7 mm

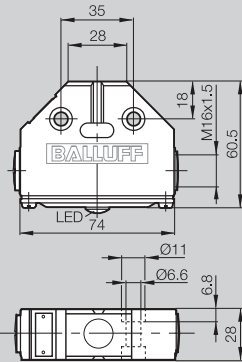

BES 516-161-H3-L

BES 516-160-H3-L

10...30 V DC

≤ 1.5 V

75 V DC

400 mA

≤ 30 mA

yes

no

≤ 5 %

-25...+70 °C

300 Hz

DC 13

yes

IP 67

Anodized GD-Al

PA 12

Screw terminals

up to 2.5 mm<sup>2</sup>

1.1

5

Connectors ...  
page 5.2 ...


For additional multiple and single  
position limit switches in main catalog  
„The Mechanical Line“,  
on CD-ROM/DVD-ROM or online!



## Inductive Sensors

DC 3-/4-wire  
Block style housings  
 $s_n$  20 mm


40×40×62 mm

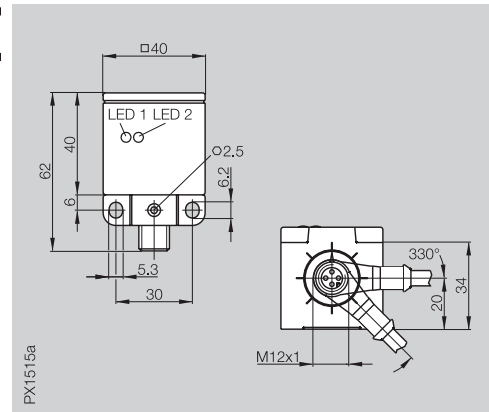

### Unicompact

The flexible sensor for varied applications in machine and systems building, even when space is limited.

The connector can be rotated in any direction, so the cable always faces the desired direction.




|                                    |                         |                                                  |
|------------------------------------|-------------------------|--------------------------------------------------|
| PNP                                | NO ①<br>complementary ③ | BES Q40KFU-PSC20B-S04G<br>BES Q40KFU-PAC20B-S04G |
| NPN                                | complementary ⑥         |                                                  |
| Supply voltage $U_B$               | 10...30 V DC            |                                                  |
| Voltage drop $U_d$ at $I_a$        | $\leq 2.5$ V            |                                                  |
| Rated insulation voltage $U_i$     | 250 V AC                |                                                  |
| Rated operational current $I_a$    | 200 mA                  |                                                  |
| No-load supply current $I_0$ max.  | $\leq 20$ mA            |                                                  |
| Polarity reversal protected        | yes                     |                                                  |
| Short circuit protected            | yes                     |                                                  |
| Repeat accuracy R                  | $\leq 5$ %              |                                                  |
| Ambient temperature range $T_a$    | -25...+70 °C            |                                                  |
| Switching frequency f              | 50 Hz                   |                                                  |
| Utilization category               | DC 13                   |                                                  |
| Function/Supply voltage indicator  | yes/yes                 |                                                  |
| Degree of protection per IEC 60529 | IP 67                   |                                                  |
| Insulation class                   | □                       |                                                  |
| Housing material                   | PBT                     |                                                  |
| Material of sensing face           | PBT                     |                                                  |
| Connection                         | Connector               |                                                  |
| Approval                           | cULus                   |                                                  |
| Recommended connector              | BKS- 19/BKS- 20         |                                                  |

① Wiring diagrams see page 1.0.6

### Mounting socket BES Q40-HW-2

Material: Metal.  
Can be used in place of original mounting socket.  
Please note mounting options!



### Mounting bracket BES Q40-HW-1

Material: Metal  
for flexible mounting.




### Protective cover BES Q40-SH-2

Material: PA 6  
Provides step protection.



Please order accessories separately!

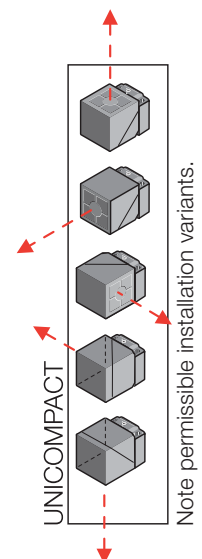

Note permissible installation variants.


# 40×40×62 mm

## Inductive Sensors


DC 3-/4-wire  
Block style housings  
s<sub>n</sub> 25 mm, 30 mm

**40×40×62 mm** Unicomact  
non-flush  
**25 mm**  
0...20.3 mm

**40×40×62 mm** Unicomact  
non-flush  
**30 mm**  
0...24.3 mm

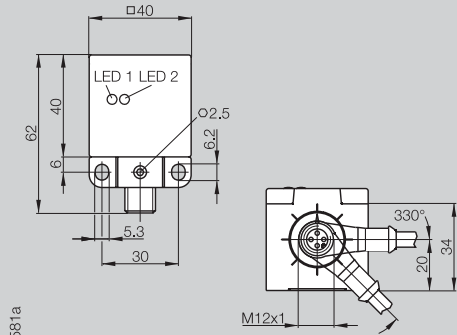

PX1581a

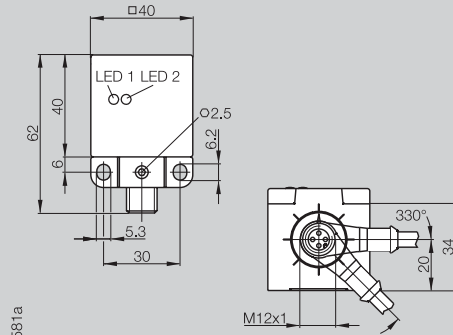

PX1581a

1.1

BES Q40KFU-PSC30F-S04G  
BES Q40KFU-PAC30F-S04G

BES Q40KFU-NAC25F-S04G

10...30 V DC  
≤ 2.5 V  
250 V AC  
200 mA  
≤ 20 mA  
yes  
yes

≤ 5 %  
-25...+70 °C  
50 Hz  
DC 13  
yes/yes

IP 67  
□  
PBT  
PBT  
Connector

cULus  
BKS- 19/BKS- 20

10...30 V DC  
≤ 2.5 V  
250 V AC  
200 mA  
≤ 20 mA  
yes  
yes

≤ 5 %  
-25...+70 °C  
50 Hz  
DC 13  
yes/yes


IP 67  
□  
PBT  
PBT  
Connector

cULus  
BKS- 19/BKS- 20

### Permissible mounting options


Rated operating distance


| s <sub>n</sub> | Attached using                       | permissible |
|----------------|--------------------------------------|-------------|
| 20 mm          | original mounting socket (plastic)   | yes         |
|                | Mounting socket BES Q40-HW-2 (metal) | yes         |
| 25 mm          | Original mounting socket (plastic)   | no          |
|                | Mounting socket BES Q40-HW-2 (metal) | no          |
| 30 mm          | Original mounting socket (plastic)   | no          |
|                | Mounting socket BES Q40-HW-2 (metal) | no          |

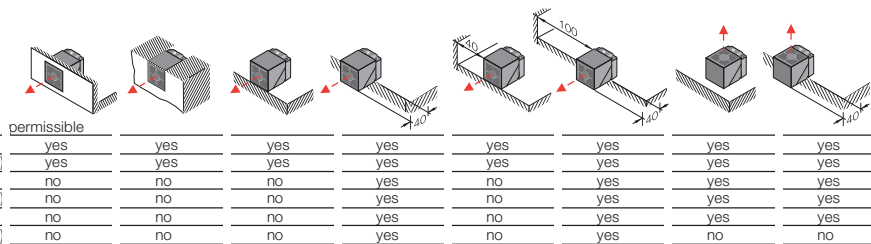

### Row mounting

flush 80 mm  
non-flush 120 mm



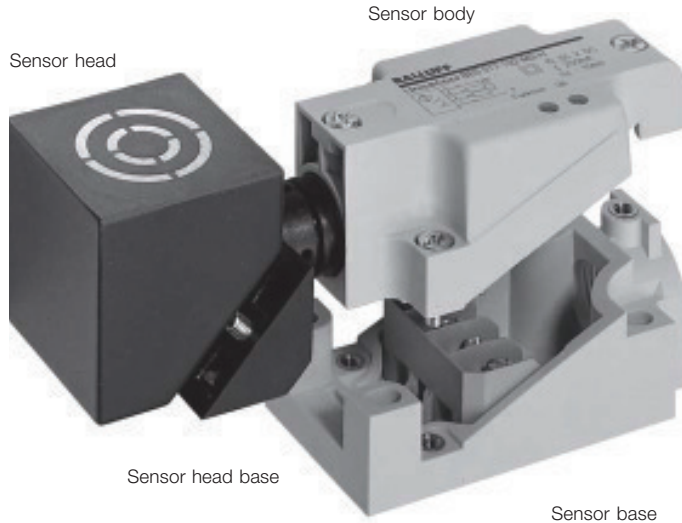

### The Unisensor – multiple uses

- The Unisensor is made up of three modular components: sensor head (including sensor head base), sensor body and sensor base.
- Easily removable pin contacts join sensor head and sensor body, e.g. easy interchange of the modules without wiring.
- Sensor base with wiring terminals, self-lifting pressure plates and ample wiring room.
- Sensor head rotatable in 5 different positions for easy adaptation to any application (see installation drawings).
- Plastic housing of PBT.
- DIN EN 60947-5-2 mounting dimensions.
- LED for supply voltage.
- LED for function indication
- Also available in special configuration for the automotive industry
- Cable fitting not included.
- In the complementary version, output terminals 2 or 4 can be wired to configure the switch as normally-closed (terminal 2) or normally-open (terminal 4). Connecting both terminals allows the switch to be used as both (see connection diagram ③ or ⑥).


### Positioning the sensor head

- Loosen the two holding screws on sensor head
- Rotate sensor head 180°
- Tighten holding screws

### Rotating the sensor head

- Loosen holding screws
- Rotate the sensor head (complete with sensor head base) into the required position (range 270°)
- Tighten holding screws
- Sensor head is protected against over-rotation

|                                         |  |
|-----------------------------------------|--|
| Housing size                            |  |
| Mounting (see notes starting p. 1.0.11) |  |
| Rated operating distance $s_n$          |  |
| Assured operating distance $s_a$        |  |




|                                    |               |   |
|------------------------------------|---------------|---|
| PNP                                | complementary | ③ |
| NPN                                | complementary | ⑥ |
| Supply voltage $U_B$               |               |   |
| Voltage drop $U_d$ at $I_e$        |               |   |
| Rated insulation voltage $U_i$     |               |   |
| Rated operational current $I_e$    |               |   |
| No-load supply current $I_0$ max.  |               |   |
| Polarity reversal protected        |               |   |
| Short circuit protected            |               |   |
| Repeat accuracy R                  |               |   |
| Ambient temperature range $T_a$    |               |   |
| Switching frequency f              |               |   |
| Utilization category               |               |   |
| Function/Supply voltage indicator  |               |   |
| Degree of protection per IEC 60529 |               |   |
| Insulation class                   |               |   |
| Housing material                   |               |   |
| Material of sensing face           |               |   |
| Connection                         |               |   |
| max. conductor cross-section       |               |   |
| Recommended connector              |               |   |
| possible mounting options          |               |   |

③ Wiring diagrams see page 1.0.6

Switching distance ■■ see page 1.0.10



Connector orientation

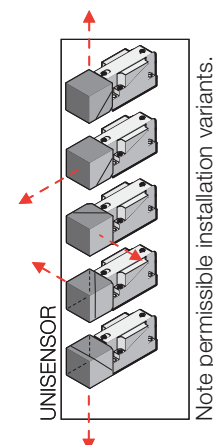

# 40×40×120 mm

## Inductive Sensors





DC 4-wire  
Block style housings  
s<sub>n</sub> 15 mm, 20 mm

**40×40×120 mm** Unisensor  
flush  
**15 mm**  
0...12.2 mm

**40×40×120 mm** Unisensor  
flush  
**15 mm**  
0...12.2 mm

**40×40×120 mm** Unisensor  
flush  
**20 mm**  
0...16.2 mm

**40×40×120 mm** Unisensor  
flush  
**20 mm**  
0...16.2 mm

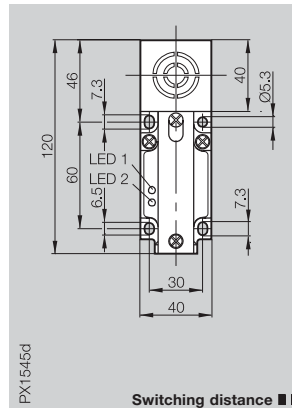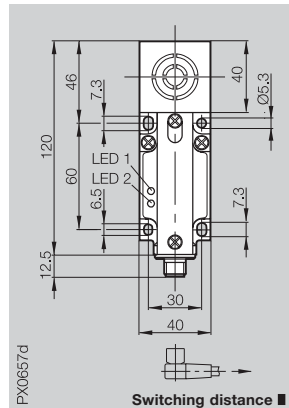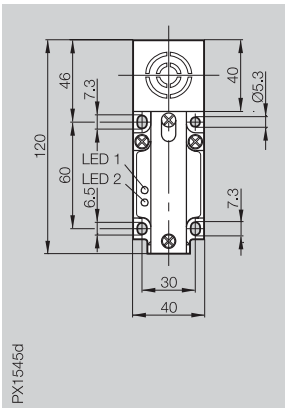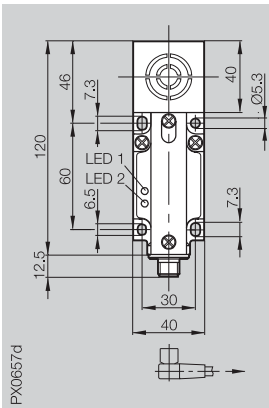

1.1

BES 517-132-M3-H-S4

BES 517-132-M3-H

BES 517-132-M6-H-S4

BES 517-132-M6-H

BES 517-134-M3-H

BES 517-134-M6-H-S4

BES 517-134-M6-H

10...55 V DC

10...55 V DC

10...55 V DC

10...55 V DC

≤ 2.5 V

≤ 2.5 V

≤ 2.5 V

≤ 2.5 V

250 V AC

250 V AC

250 V AC

250 V AC

200 mA

200 mA

200 mA

200 mA

≤ 20 mA

≤ 20 mA

≤ 20 mA

≤ 20 mA

yes

yes

yes

yes

yes

yes

yes

yes

≤ 5 %

≤ 5 %

≤ 5 %

≤ 5 %

-25...+70 °C

-25...+70 °C

-25...+70 °C

-25...+70 °C

100 Hz

100 Hz

50 Hz

50 Hz

DC 13

DC 13

DC 13

DC 13

yes/yes

yes/yes

yes/yes

yes/yes

IP 67

IP 67

IP 67

IP 67

PBT

PBT

PBT

PBT

PBT

PBT

PBT

PBT

Connector

Screw terminals

Connector

Screw terminals

up to 2.5 mm<sup>2</sup>

up to 2.5 mm<sup>2</sup>

BKS- 19/BKS- 20

BKS- 19/BKS- 20

Fig. 1 to 5

Fig. 1 to 5

Fig. 1 to 5

Fig. 1 to 5

### Mounting options




Fig. 1




Fig. 2




Fig. 3




Fig. 4





Fig. 5

### Row mounting



5




Connectors,  
mounting  
plate ...  
page 5.2 ...



# Inductive Sensors

DC 3-wire  
Block style housings  
s<sub>n</sub> 25/40 mm


|                                           |                               |                               |
|-------------------------------------------|-------------------------------|-------------------------------|
| Housing size                              | <b>40×40×120 mm</b> Unisensor | <b>40×40×120 mm</b> Unisensor |
| Mounting (see notes starting p. 1.0.11)   | non-flush                     | non-flush                     |
| Rated operating distance s <sub>n</sub>   | <b>programmable 25/40 mm</b>  | <b>programmable 25/40 mm</b>  |
| Assured operating distance s <sub>a</sub> | 0...20.3 mm/0...32.4 mm       | 0...20.3 mm/0...32.4 mm       |

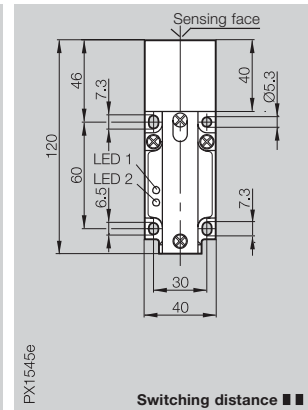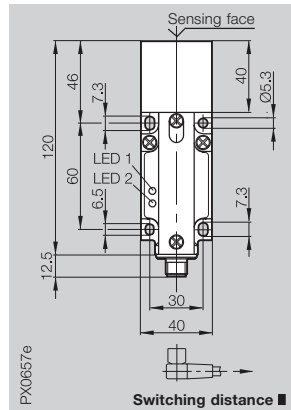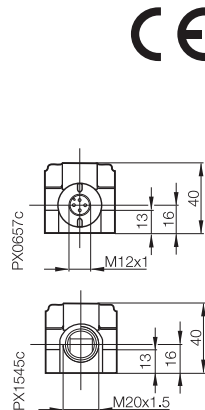

|                                               |                                                                       |   |                                                                       |                  |
|-----------------------------------------------|-----------------------------------------------------------------------|---|-----------------------------------------------------------------------|------------------|
| PNP                                           | NO                                                                    | ① | BES 517-385-V-C-S4                                                    | BES 517-385-MV-C |
|                                               | complementary                                                         | ③ |                                                                       |                  |
| NPN complementary ⑥                           |                                                                       |   |                                                                       |                  |
| Supply voltage U <sub>B</sub>                 | 10...30 V DC                                                          |   | 10...30 V DC                                                          |                  |
| Voltage drop U <sub>d</sub> at I <sub>B</sub> | ≤ 3.5 V                                                               |   | ≤ 3.5 V                                                               |                  |
| Rated insulation voltage U <sub>i</sub>       | 250 V AC                                                              |   | 250 V AC                                                              |                  |
| Rated operational current I <sub>B</sub>      | 200 mA                                                                |   | 200 mA                                                                |                  |
| No-load supply current I <sub>0</sub> max.    | ≤ 15 mA                                                               |   | ≤ 15 mA                                                               |                  |
| Polarity reversal protected                   | yes                                                                   |   | yes                                                                   |                  |
| Short circuit protected                       | yes                                                                   |   | yes                                                                   |                  |
| Repeat accuracy R                             | ≤ 5 %                                                                 |   | ≤ 5 %                                                                 |                  |
| Ambient temperature range T <sub>a</sub>      | -25...+70 °C                                                          |   | -25...+70 °C                                                          |                  |
| Switching frequency f                         | 50 Hz                                                                 |   | 50 Hz                                                                 |                  |
| Utilization category                          | DC 13                                                                 |   | DC 13                                                                 |                  |
| Function/Supply voltage indicator             | yes/yes                                                               |   | yes/yes                                                               |                  |
| Degree of protection per IEC 60529            | IP 67                                                                 |   | IP 67                                                                 |                  |
| Insulation class                              | □                                                                     |   | □                                                                     |                  |
| Housing material                              | PBT                                                                   |   | PBT                                                                   |                  |
| Material of sensing face                      | PBT                                                                   |   | PBT                                                                   |                  |
| Connection                                    | Connector                                                             |   | Screw terminals                                                       |                  |
| max. conductor cross-section                  |                                                                       |   | up to 2.5 mm <sup>2</sup>                                             |                  |
| Recommended connector                         | BKS- 19/BKS- 20                                                       |   |                                                                       |                  |
| possible mounting options                     | s <sub>n</sub> 40 mm Fig. 1 and 2<br>s <sub>n</sub> 25 mm Fig. 1 to 3 |   | s <sub>n</sub> 40 mm Fig. 1 and 2<br>s <sub>n</sub> 25 mm Fig. 1 to 3 |                  |

① Wiring diagrams see page 1.0.6  
Switching distance ■■ see page 1.0.10

→ Connector orientation

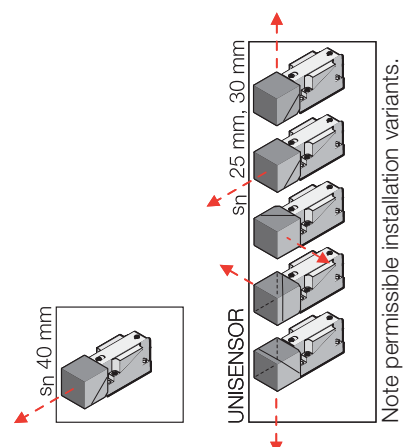

# 40×40×120 mm

## Inductive Sensors





DC 4-wire  
Block style housings  
s<sub>n</sub> 30 mm, 40 mm

**40×40×120 mm** Unisensor  
non-flush  
**30 mm**  
0...24.3 mm

**40×40×120 mm** Unisensor  
non-flush  
**30 mm**  
0...24.3 mm

**40×40×120 mm** Unisensor  
non-flush  
**40 mm**  
0...32.4 mm

**40×40×120 mm** Unisensor  
non-flush  
**40 mm**  
0...32.4 mm

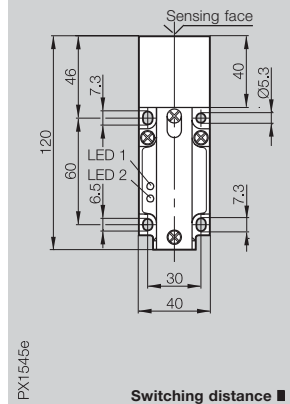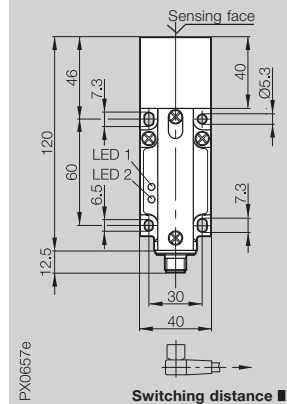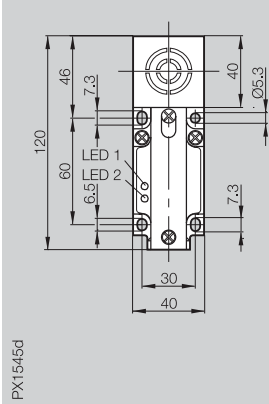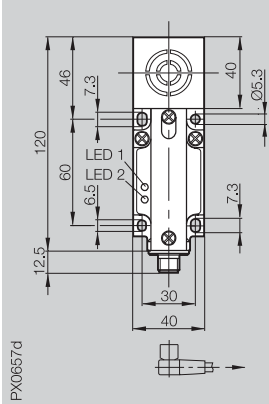

BES 517-132-M5-H-S4

BES 517-132-M5-H

BES 517-132-M7-H-S4

BES 517-132-M7-H

BES 517-134-M5-H-S4

BES 517-134-M5-H

10...55 V DC

10...55 V DC

10...55 V DC

10...55 V DC

≤ 2.5 V

≤ 2.5 V

≤ 2.5 V

≤ 2.5 V

250 V AC

250 V AC

250 V AC

250 V AC

200 mA

200 mA

200 mA

200 mA

≤ 20 mA

≤ 20 mA

≤ 20 mA

≤ 20 mA

yes

yes

yes

yes

yes

yes

yes

yes

≤ 5 %

≤ 5 %

≤ 5 %

≤ 5 %

-25...+70 °C

-25...+70 °C

-25...+70 °C

-25...+70 °C

60 Hz

60 Hz

50 Hz

50 Hz

DC 13

DC 13

DC 13

DC 13

yes/yes

yes/yes

yes/yes

yes/yes

IP 67

IP 67

IP 67

IP 67

PBT

PBT

PBT

PBT

PBT

PBT

PBT

PBT

Connector

Screw terminals

Connector

Screw terminals

up to 2.5 mm<sup>2</sup>

up to 2.5 mm<sup>2</sup>

BKS- 19/BKS- 20

Fig. 1 and 3

BKS- 19/BKS- 20

Fig. 1 and 2

Fig. 1 and 2

### Mounting options


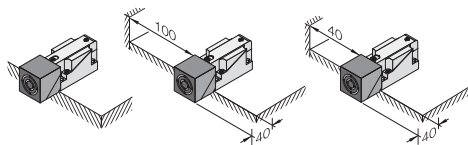


Fig. 1

Fig. 2

Fig. 3

### Row mounting



5

Connectors,  
mounting  
plate ...  
page 5.2 ...

### Non-flush mount




Fig. a




Fig. b




Fig. c

### Minimum distances with steel

| h  | A  | B  | C   |
|----|----|----|-----|
| 40 | 70 | 80 | 90  |
| 70 | 80 | 90 | 100 |


### Minimum distances with aluminum

| h  | A  | B  | C  |
|----|----|----|----|
| 40 | 0  | 10 | 10 |
| 70 | 10 | 20 | 20 |

Dimensions in mm

The change in effective operating distance  $s_r$  for these installation dimensions is  $\leq 10\%$ .

|                                         |                        |                        |
|-----------------------------------------|------------------------|------------------------|
| Housing size                            | 80×84×40 mm Maxisensor | 80×84×40 mm Maxisensor |
| Mounting (see notes starting p. 1.0.11) | flush                  | non-flush              |
| Rated operating distance $s_n$          | 40 mm                  | 50 mm                  |
| Assured operating distance $s_a$        | 0...32.4 mm            | 0...40.5 mm            |

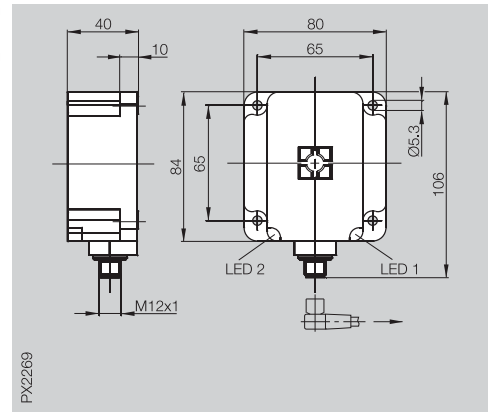

|                                    |                     |        |                                                |                                                |  |
|------------------------------------|---------------------|--------|------------------------------------------------|------------------------------------------------|--|
| PNP                                | NO<br>complementary | ①<br>③ | BES Q80KA-PSH40B-S04Q<br>BES Q80KA-PAH40B-S04Q | BES Q80KA-PSH50F-S04Q<br>BES Q80KA-PAH50F-S04Q |  |
| NPN                                | complementary       | ⑥      |                                                |                                                |  |
| Supply voltage $U_B$               |                     |        | 10...55 V DC                                   | 10...55 V DC                                   |  |
| Voltage drop $U_d$ at $I_e$        |                     |        | ≤ 2.5 V                                        | ≤ 2.5 V                                        |  |
| Rated insulation voltage $U_i$     |                     |        | 250 V AC                                       | 250 V AC                                       |  |
| Rated operational current $I_e$    |                     |        | 200 mA                                         | 200 mA                                         |  |
| No-load supply current $I_0$ max.  |                     |        | ≤ 15 mA                                        | ≤ 15 mA                                        |  |
| Polarity reversal protected        |                     |        | yes                                            | yes                                            |  |
| Short circuit protected            |                     |        | yes                                            | yes                                            |  |
| Repeat accuracy R                  |                     |        | ≤ 5 %                                          | ≤ 5 %                                          |  |
| Ambient temperature range $T_a$    |                     |        | -25...+70 °C                                   | -25...+70 °C                                   |  |
| Switching frequency f              |                     |        | 50 Hz                                          | 50 Hz                                          |  |
| Utilization category               |                     |        | DC 13                                          | DC 13                                          |  |
| Function/Supply voltage indicator  |                     |        | yes/yes                                        | yes/yes                                        |  |
| Degree of protection per IEC 60529 |                     |        | IP 67                                          | IP 67                                          |  |
| Insulation class                   |                     |        | □                                              | □                                              |  |
| Housing material                   |                     |        | PBT                                            | PBT                                            |  |
| Material of sensing face           |                     |        | PBT                                            | PBT                                            |  |
| Connection                         |                     |        | Connector                                      | Connector                                      |  |
| max. conductor cross-section       |                     |        |                                                |                                                |  |
| Recommended connector              |                     |        | BKS-_ 19/BKS-_ 20                              | BKS-_ 19/BKS-_ 20                              |  |
| possible mounting options          |                     |        | Fig. d                                         | Fig. a to c                                    |  |

### Flush mount




Fig. d



# 80×80×40 mm


## Inductive Sensors

DC 4-wire  
Block style housings  
s<sub>n</sub> 40 mm, 50 mm


**80×80×40 mm** Maxisensor  
flush  
**40 mm**  
0...32.4 mm

**80×80×40 mm** Maxisensor  
non-flush  
**50 mm**  
0...40.5 mm

**80×80×40 mm** Maxisensor  
non-flush  
**50 mm**  
0...40.5 mm

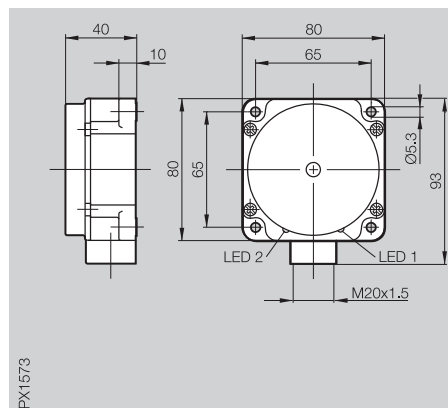

PX1573

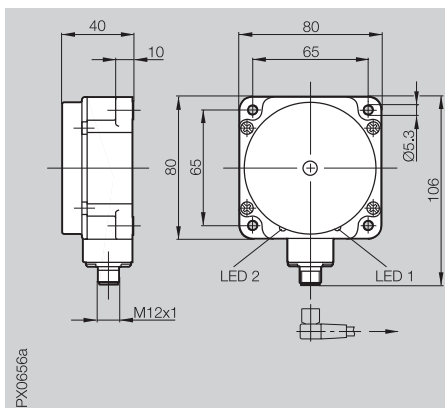

PX0656a

1.1

BES 517-139-M4-H

BES 517-139-M5-H

BES 517-140-M5-H

BES 517-140-M5-H-S4

10...55 V DC

≤ 2.5 V

250 V AC

200 mA

≤ 15 mA

yes

yes

≤ 5 %

-25...+70 °C

50 Hz

DC 13

yes/yes

IP 67



PBT

PBT

Screw terminals  
up to 2.5 mm<sup>2</sup>

Fig. 1 to 4

10...55 V DC

≤ 2.5 V

250 V AC

200 mA

≤ 15 mA

yes

yes

≤ 5 %

-25...+70 °C

100 Hz

DC 13

yes/yes

IP 67



PBT

PBT

Screw terminals  
to 2.5 mm<sup>2</sup>

Fig. 4

10...55 V DC

≤ 2.5 V

250 V AC

200 mA

≤ 15 mA

yes

yes

≤ 5 %

-25...+70 °C

100 Hz

DC 13

yes/yes

IP 67



PBT

PBT

Connector

BKS- 19/BKS- 20

Fig. 4

Mounting in  
steel




Fig. 1

Mounting in  
non-ferrous  
metals




Fig. 2

Mounting in steel/  
non-ferrous metals




Fig. 3

Mounting on steel/  
non-ferrous metals





Fig. 4





5

Connectors  
page 5.2 ...

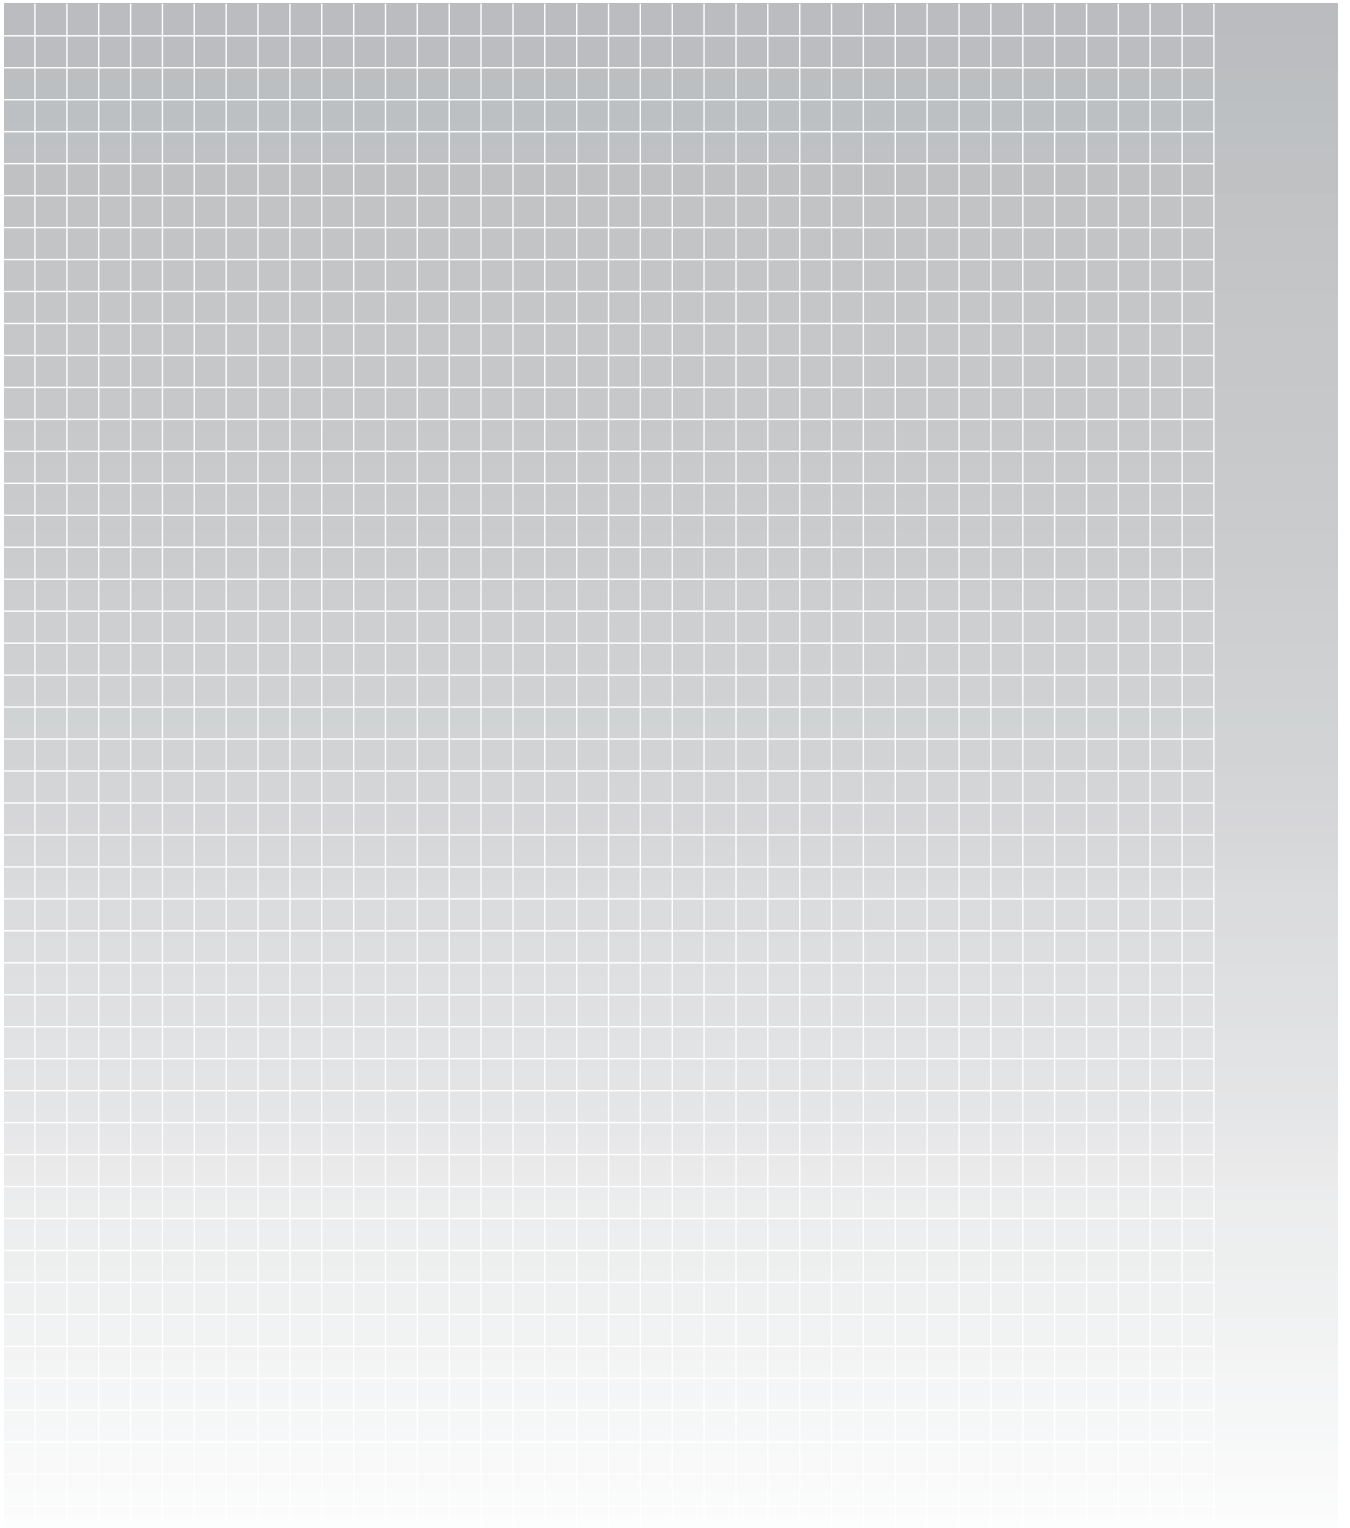

# Inductive – DC 2-wire

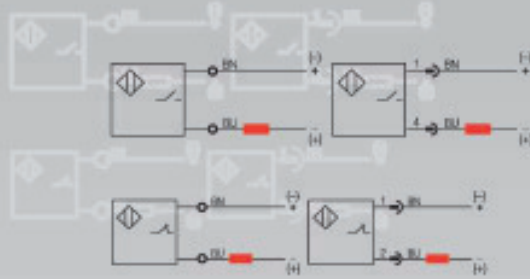

40 to 50 mm  
housing length with  
maximum thread  
length and switching  
distance ■■

Size  
housing length

## Our standard line in 2-wire DC


With this broad range of products, Balluff offers proximity switches in housings from M8 to M30 as well as block style housings for virtually any application in the field of automation.

- 1.2.2** M8
- 1.2.4** M12
- 1.2.6** M18
- 1.2.8** M30
- 1.2.10** Block style housings

**1.2**



|                                           |               |               |             |             |
|-------------------------------------------|---------------|---------------|-------------|-------------|
| Housing size                              | <b>M8x1</b>   | <b>M8x1</b>   | <b>M8x1</b> | <b>M8x1</b> |
| Mounting (see notes starting p. 1.0.11)   | flush         | flush         | flush       | flush       |
| Rated operating distance s <sub>n</sub>   | <b>1.5 mm</b> | <b>1.5 mm</b> | <b>2 mm</b> | <b>2 mm</b> |
| Assured operating distance s <sub>a</sub> | 0...1.2 mm    | 0...1.2 mm    | 0...1.6 mm  | 0...1.6 mm  |

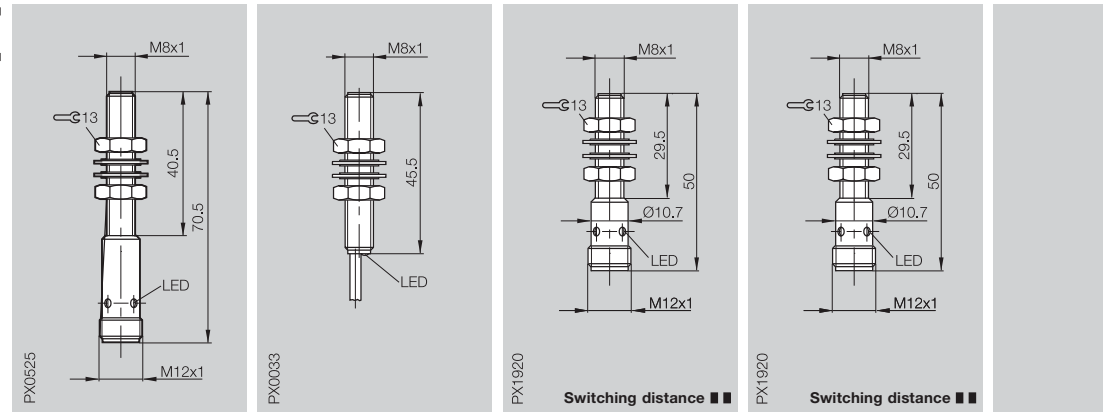


|                                                      |                            |                            |                            |                        |
|------------------------------------------------------|----------------------------|----------------------------|----------------------------|------------------------|
| NO ⑨ non-polarized ⑦ polarized<br>NC ⑩ non-polarized | BES 516-527-S4-H           | BES 516-527-E0-H-03        | BES M08ME1-USC20B-S04G     | BES M08ME1-GSC20B-S04G |
| Supply voltage U <sub>B</sub>                        | 10...55 V DC non-polarized | 10...55 V DC non-polarized | 10...30 V DC non-polarized | 10...30 V DC polarized |
| Voltage drop U <sub>d</sub> at I <sub>e</sub>        | ≤ 5 V                      | ≤ 5 V                      | ≤ 5 V                      | ≤ 5 V                  |
| Rated insulation voltage U <sub>i</sub>              | 75 V DC                    | 75 V DC                    | 75 V DC                    | 75 V DC                |
| Rated operational current I <sub>e</sub>             | 130 mA                     | 130 mA                     | 100 mA                     | 100 mA                 |
| Minimum operating current I <sub>m</sub>             | 5 mA                       | 5 mA                       | 5 mA                       | 5 mA                   |
| Off-state current I <sub>r</sub>                     | ≤ 500 µA                   | ≤ 500 µA                   | ≤ 600 µA                   | ≤ 600 µA               |
| Polarity reversal protected                          | yes                        | yes                        | yes                        | yes                    |
| Short circuit protected                              | yes                        | yes                        | yes                        | yes                    |
| Permissible load capacitance                         | ≤ 1 µF                     | ≤ 1 µF                     | ≤ 1 µF                     | ≤ 1 µF                 |
| Repeat accuracy R                                    | ≤ 5 %                      | ≤ 5 %                      | ≤ 5 %                      | ≤ 5 %                  |
| Ambient temperature range T <sub>a</sub>             | -25...+70 °C               | -25...+70 °C               | -25...+70 °C               | -25...+70 °C           |
| Switching frequency f                                | 3000 Hz                    | 3000 Hz                    | max. 1500 Hz               | max. 1500 Hz           |
| Utilization category                                 | DC 13                      | DC 13                      | DC 13                      | DC 13                  |
| Function indicator                                   | yes                        | yes                        | yes                        | yes                    |
| Degree of protection per IEC 60529                   | IP 67                      | IP 67                      | IP 67                      | IP 67                  |
| Housing material                                     | Stainless steel            | Stainless steel            | CuZn coated                | CuZn coated            |
| Material of sensing face                             | PBT                        | PBT                        | PBT                        | PBT                    |
| Connection                                           | Connector                  | 3 m PVC cable              | Connector                  | Connector              |
| No. of wires × cross-section                         |                            | 2×0.14 mm <sup>2</sup>     |                            |                        |
| Approval                                             | cULus                      | cULus                      | cULus                      | cULus                  |
| Recommended connector                                | BKS-S 19-12/-S 20-12       |                            | BKS-S 19-11/-S 20-11       | BKS-S 19-13/-S 20-13   |

⑨ For wiring diagrams for 2-wire controllers, see page 1.0.6  
Switching distance ■■ see page 1.0.10

Other cable lengths and PUR cable jacket material on request.

### Recommendation for wiring polarized sensors to 3-wire controllers



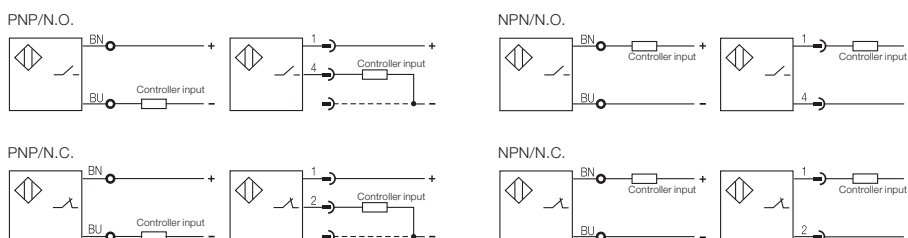


### DC 2-wire sensors – for universal use

DC 2-wire sensors can also be used together with most PNP or NPN controllers.

Use of these sensors enables a reduction in the number of inventoried part numbers.





Suitability of the 2-wire sensors for the respective PNP or NPN controller should be tested in advance.

| M8×1<br>flush<br>2 mm<br>0...1.6 mm                                               | M8×1<br>flush<br>2 mm<br>0...1.6 mm                                               | M8×1<br>flush<br>2 mm<br>0...1.6 mm                                               |  |  |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--|--|
|  |  |  |  |  |
| BES M08MG-GSC20B-BP00,3-GS04                                                      | BES M08MG-USC20B-BV02                                                             | BES M08MG-GSC20B-BV02                                                             |  |  |
| 10...30 V DC polarized                                                            | 10...30 V DC non-polarized                                                        | 10...30 V DC polarized                                                            |  |  |
| ≤ 5 V                                                                             | ≤ 5 V                                                                             | ≤ 5 V                                                                             |  |  |
| 75 V DC                                                                           | 75 V DC                                                                           | 75 V DC                                                                           |  |  |
| 100 mA                                                                            | 100 mA                                                                            | 100 mA                                                                            |  |  |
| 5 mA                                                                              | 5 mA                                                                              | 5 mA                                                                              |  |  |
| ≤ 600 µA                                                                          | ≤ 600 µA                                                                          | ≤ 600 µA                                                                          |  |  |
| yes                                                                               | yes                                                                               | yes                                                                               |  |  |
| yes                                                                               | yes                                                                               | yes                                                                               |  |  |
| ≤ 1 µF                                                                            | ≤ 1 µF                                                                            | ≤ 1 µF                                                                            |  |  |
| ≤ 5 %                                                                             | ≤ 5 %                                                                             | ≤ 5 %                                                                             |  |  |
| -25...+70 °C                                                                      | -25...+70 °C                                                                      | -25...+70 °C                                                                      |  |  |
| max. 1500 Hz                                                                      | max. 1500 Hz                                                                      | max. 1500 Hz                                                                      |  |  |
| DC 13                                                                             | DC 13                                                                             | DC 13                                                                             |  |  |
| yes                                                                               | yes                                                                               | yes                                                                               |  |  |
| IP 67                                                                             | IP 67                                                                             | IP 67                                                                             |  |  |
| CuZn coated                                                                       | CuZn coated                                                                       | CuZn coated                                                                       |  |  |
| PBT                                                                               | PBT                                                                               | PBT                                                                               |  |  |
| 0.3 m PUR cable with connector                                                    | 2 m PVC cable                                                                     | 2 m PVC cable                                                                     |  |  |
|                                                                                   | 2×0.14 mm <sup>2</sup>                                                            | 2×0.14 mm <sup>2</sup>                                                            |  |  |
| cULus                                                                             | cULus                                                                             | cULus                                                                             |  |  |
| BKS-S 19-13                                                                       |                                                                                   |                                                                                   |  |  |





|                                           |              |              |              |              |
|-------------------------------------------|--------------|--------------|--------------|--------------|
| Housing size                              | <b>M12x1</b> | <b>M12x1</b> | <b>M12x1</b> | <b>M12x1</b> |
| Mounting (see notes starting p. 1.0.11)   | flush        | flush        | flush        | flush        |
| Rated operating distance s <sub>n</sub>   | <b>2 mm</b>  | <b>2 mm</b>  | <b>3 mm</b>  | <b>3 mm</b>  |
| Assured operating distance s <sub>a</sub> | 0...1.6 mm   | 0...1.6 mm   | 0...2.4 mm   | 0...2.4 mm   |

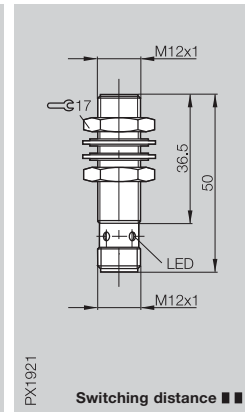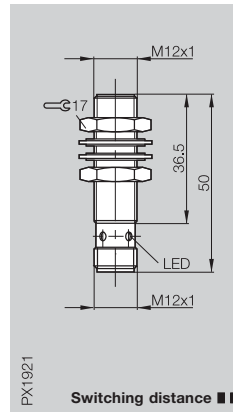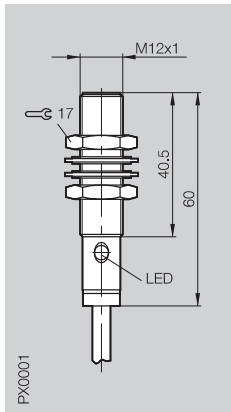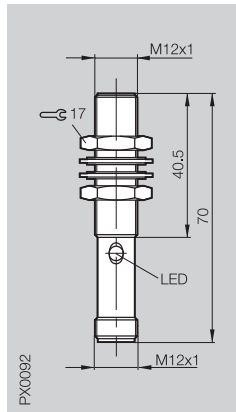

|                                                      |                            |                            |                            |                        |
|------------------------------------------------------|----------------------------|----------------------------|----------------------------|------------------------|
| NO ⑨ non-polarized ⑦ polarized<br>NC ⑩ non-polarized | BES 516-543-S4-H           | BES 516-543-B0-H-03        | BES M12MF-USC30B-S04G      | BES M12MF-GSC30B-S04G  |
| Supply voltage U <sub>B</sub>                        | 10...55 V DC non-polarized | 10...55 V DC non-polarized | 10...30 V DC non-polarized | 10...30 V DC polarized |
| Voltage drop U <sub>d</sub> at I <sub>e</sub>        | ≤ 5 V                      | ≤ 5 V                      | ≤ 5 V                      | ≤ 4 V                  |
| Rated insulation voltage U <sub>i</sub>              | 250 V AC                   | 250 V AC                   | 75 V DC                    | 75 V DC                |
| Rated operational current I <sub>e</sub>             | 200 mA                     | 200 mA                     | 100 mA                     | 100 mA                 |
| Minimum operating current I <sub>m</sub>             | 5 mA                       | 5 mA                       | 5 mA                       | 5 mA                   |
| Off-state current I <sub>r</sub>                     | ≤ 500 µA                   | ≤ 500 µA                   | ≤ 600 µA                   | ≤ 600 µA               |
| Polarity reversal protected                          | yes                        | yes                        | yes                        | yes                    |
| Short circuit protected                              | yes                        | yes                        | yes                        | yes                    |
| Permissible load capacitance                         | ≤ 1 µF                     | ≤ 1 µF                     | ≤ 1 µF                     | ≤ 1 µF                 |
| Repeat accuracy R                                    | ≤ 5 %                      | ≤ 5 %                      | ≤ 5 %                      | ≤ 5 %                  |
| Ambient temperature range T <sub>a</sub>             | -25...+70 °C               | -25...+70 °C               | -25...+70 °C               | -25...+70 °C           |
| Switching frequency f                                | 2500 Hz                    | 2500 Hz                    | max. 1300 Hz               | max. 1300 Hz           |
| Utilization category                                 | DC 13                      | DC 13                      | DC 13                      | DC 13                  |
| Function indicator                                   | yes                        | yes                        | yes                        | yes                    |
| Degree of protection per IEC 60529                   | IP 68 per BWN Pr. 20       | IP 68 per BWN Pr. 20       | IP 67                      | IP 67                  |
| Insulation class                                     | □                          | □                          |                            |                        |
| Housing material                                     | Stainless steel            | Stainless steel            | CuZn coated                | CuZn coated            |
| Material of sensing face                             | PA 12                      | PA 12                      | PA 12                      | PA 12                  |
| Connection                                           | Connector                  | 3 m PVC cable              | Connector                  | Connector              |
| No. of wires × cross-section                         |                            | 2×0.34 mm <sup>2</sup>     |                            |                        |
| Approval                                             | cULus                      | cULus                      | cULus                      | cULus                  |
| Recommended connector                                | BKS-S 19-12/-S 20-12       |                            | BKS-S 19-11/-S 20-11       | BKS-S 19-13/-S 20-13   |

⑨ Wiring diagrams see page 1.0.6  
Switching distance ■■ see page 1.0.10




Other cable lengths and  
PUR cable jacket material on request.



| M12×1<br>flush<br>3 mm<br>0...2.4 mm                                                             | M12×1<br>flush<br>3 mm<br>0...2.4 mm                                                                 | M12×1<br>flush<br>3 mm<br>0...2.4 mm                                                             | M12×1<br>non-flush<br>4 mm<br>0...3.2 mm                                                              | M12×1<br>non-flush<br>4 mm<br>0...3.2 mm                                                              |
|--------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|
|                                                                                                  |                                                                                                      |                                                                                                  |                                                                                                       |                                                                                                       |
| BES M12MG-GSC30B-BP00,3-GS04                                                                     | BES M12MG-USC30B-BV02                                                                                | BES M12MG-GSC30B-BV02                                                                            | BES 516-545-S4-H                                                                                      | BES 516-545-B0-H-03                                                                                   |
| 10...30 V DC polarized<br>≤ 4 V<br>75 V DC<br>100 mA<br>5 mA<br>≤ 600 μA<br>yes<br>yes<br>≤ 1 μF | 10...30 V DC non-polarized<br>≤ 5 V<br>75 V DC<br>100 mA<br>5 mA<br>≤ 600 μA<br>yes<br>yes<br>≤ 1 μF | 10...30 V DC polarized<br>≤ 4 V<br>75 V DC<br>100 mA<br>5 mA<br>≤ 600 μA<br>yes<br>yes<br>≤ 1 μF | 10...55 V DC non-polarized<br>≤ 5 V<br>250 V AC<br>200 mA<br>5 mA<br>≤ 500 μA<br>yes<br>yes<br>≤ 1 μF | 10...55 V DC non-polarized<br>≤ 5 V<br>250 V AC<br>200 mA<br>5 mA<br>≤ 500 μA<br>yes<br>yes<br>≤ 1 μF |
| ≤ 5 %<br>-25...+70 °C<br>max. 1300 Hz<br>DC 13<br>yes                                            | ≤ 5 %<br>-25...+70 °C<br>max. 1300 Hz<br>DC 13<br>yes                                                | ≤ 5 %<br>-25...+70 °C<br>max. 1300 Hz<br>DC 13<br>yes                                            | ≤ 5 %<br>-25...+70 °C<br>1000 Hz<br>DC 13<br>yes                                                      | ≤ 5 %<br>-25...+70 °C<br>1000 Hz<br>DC 13<br>yes                                                      |
| IP 67                                                                                            | IP 67                                                                                                | IP 67                                                                                            | IP 68 per BWN Pr. 20<br>☐                                                                             | IP 68 per BWN Pr. 20<br>☐                                                                             |
| CuZn coated                                                                                      | CuZn coated                                                                                          | CuZn coated                                                                                      | Stainless steel                                                                                       | Stainless steel                                                                                       |
| PBT<br>0.3 m PUR cable with<br>connector                                                         | PA 12<br>2 m PVC cable                                                                               | PA 12<br>2 m PVC cable                                                                           | PA 12<br>Connector                                                                                    | PA 12<br>3 m PVC cable                                                                                |
| cULus<br>BKS-S 19-13                                                                             | 2×0.34 mm <sup>2</sup><br>cULus                                                                      | 2×0.34 mm <sup>2</sup><br>cULus                                                                  | cULus<br>BKS-S 19-12/-S 20-12                                                                         | 2×0.34 mm <sup>2</sup><br>cULus                                                                       |



|                                           |              |              |              |
|-------------------------------------------|--------------|--------------|--------------|
| Housing size                              | <b>M18x1</b> | <b>M18x1</b> | <b>M18x1</b> |
| Mounting (see notes starting p. 1.0.11)   | flush        | flush        | flush        |
| Rated operating distance s <sub>n</sub>   | <b>5 mm</b>  | <b>7 mm</b>  | <b>7 mm</b>  |
| Assured operating distance s <sub>a</sub> | 0...4.1 mm   | 0...5.7 mm   | 0...5.7 mm   |

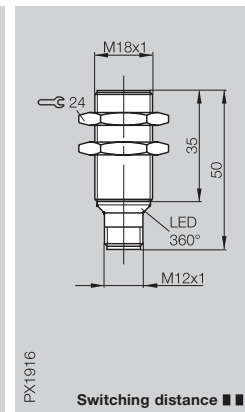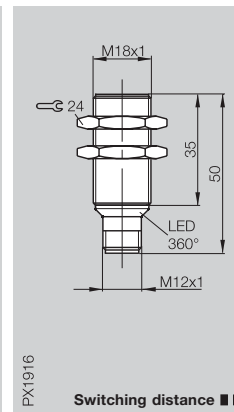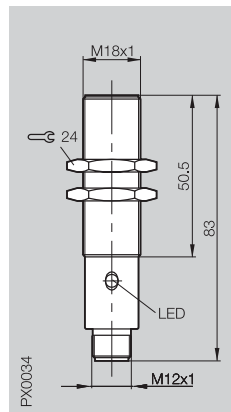

|                                               |                            |                            |                        |
|-----------------------------------------------|----------------------------|----------------------------|------------------------|
| NO ⑨ non-polarized ⑦ polarized                |                            |                            |                        |
| NC ⑩ non-polarized                            |                            |                            |                        |
|                                               | BES 516-539-S4-H           | BES M18MF-USC70B-S04K      | BES M18MF-GSC70B-S04K  |
| Supply voltage U <sub>B</sub>                 | 10...55 V DC non-polarized | 10...30 V DC non-polarized | 10...30 V DC polarized |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 5 V                      | ≤ 5 V                      | ≤ 4 V                  |
| Rated insulation voltage U <sub>i</sub>       | 250 V AC                   | 75 V DC                    | 75 V DC                |
| Rated operational current I <sub>e</sub>      | 200 mA                     | 100 mA                     | 100 mA                 |
| Minimum operating current I <sub>m</sub>      | 5 mA                       | 5 mA                       | 5 mA                   |
| Off-state current I <sub>r</sub>              | ≤ 500 µA                   | ≤ 600 µA                   | ≤ 600 µA               |
| Polarity reversal protected                   | yes                        | yes                        | yes                    |
| Short circuit protected                       | yes                        | yes                        | yes                    |
| Permissible load capacitance                  | ≤ 1 µF                     | ≤ 1 µF                     | ≤ 1 µF                 |
| Repeat accuracy R                             | ≤ 5 %                      | ≤ 5 %                      | ≤ 5 %                  |
| Ambient temperature range T <sub>a</sub>      | -25...+70 °C               | -25...+70 °C               | -25...+70 °C           |
| Switching frequency f                         | 250 Hz                     | max. 600 Hz                | max. 600 Hz            |
| Utilization category                          | DC 13                      | DC 13                      | DC 13                  |
| Function indicator                            | yes                        | yes                        | yes                    |
| Degree of protection per IEC 60529            | IP 68 per BWN Pr. 20       | IP 67                      | IP 67                  |
| Insulation class                              | □                          |                            |                        |
| Housing material                              | CuZn coated                | CuZn coated                | CuZn coated            |
| Material of sensing face                      | PA 12                      | PBT                        | PBT                    |
| Connection                                    | Connector                  | Connector                  | Connector              |
| No. of wires × cross-section                  |                            |                            |                        |
| Approval                                      | cULus                      | cULus                      | cULus                  |
| Recommended connector                         | BKS-S 19-12/-S 20-12       | BKS-S 19-11/-S 20-11       | BKS-S 19-13/-S 20-13   |

⑨ Wiring diagrams see page 1.0.6  
Switching distance ■■ see page 1.0.10





Other cable lengths and  
PUR cable jacket material on request.



# M18

## Inductive Sensors

DC 2-wire  
M18  
s<sub>n</sub> 7 mm, 8 mm
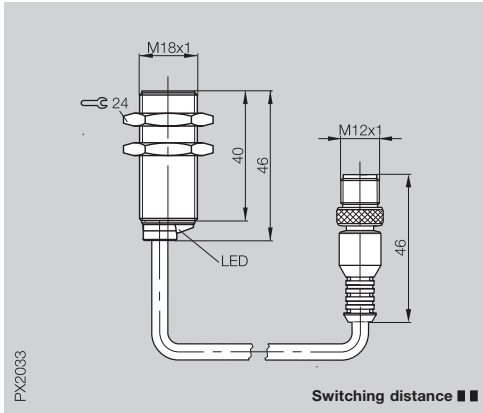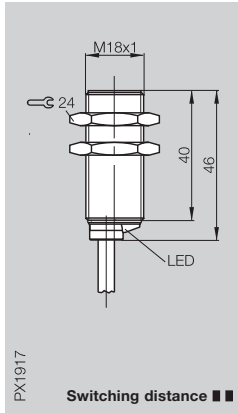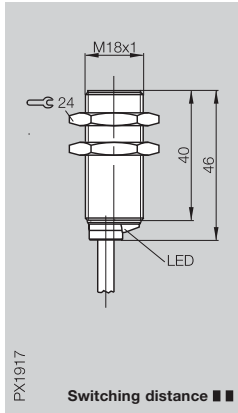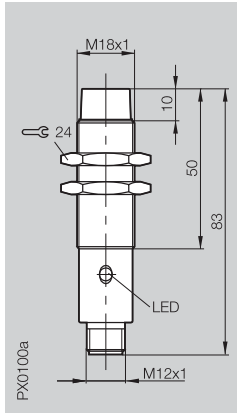
| M18x1<br>flush<br>7 mm<br>0...5.7 mm                                              | M18x1<br>flush<br>7 mm<br>0...5.7 mm                                              | M18x1<br>flush<br>7 mm<br>0...5.7 mm                                               | M18x1<br>non-flush<br>8 mm<br>0...6.5 mm                                            |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |
| BES M18MG-GSC70B-BP00,3-GS04                                                      | BES M18MG-USC70B-BV02                                                             | BES M18MG-GSC70B-BV02                                                              | BES 516-547-S4-H                                                                    |
| 10...30 V DC polarized                                                            | 10...30 V DC non-polarized                                                        | 10...30 V DC polarized                                                             | 10...55 V DC non-polarized                                                          |
| ≤ 4 V                                                                             | ≤ 5 V                                                                             | ≤ 4 V                                                                              | ≤ 5 V                                                                               |
| 75 V DC                                                                           | 75 V DC                                                                           | 75 V DC                                                                            | 250 V AC                                                                            |
| 100 mA                                                                            | 100 mA                                                                            | 100 mA                                                                             | 200 mA                                                                              |
| 5 mA                                                                              | 5 mA                                                                              | 5 mA                                                                               | 5 mA                                                                                |
| ≤ 600 µA                                                                          | ≤ 600 µA                                                                          | ≤ 600 µA                                                                           | ≤ 500 µA                                                                            |
| yes                                                                               | yes                                                                               | yes                                                                                | yes                                                                                 |
| yes                                                                               | yes                                                                               | yes                                                                                | yes                                                                                 |
| ≤ 1 µF                                                                            | ≤ 1 µF                                                                            | ≤ 1 µF                                                                             | ≤ 1 µF                                                                              |
| ≤ 5 %                                                                             | ≤ 5 %                                                                             | ≤ 5 %                                                                              | ≤ 5 %                                                                               |
| -25...+70 °C                                                                      | -25...+70 °C                                                                      | -25...+70 °C                                                                       | -25...+70 °C                                                                        |
| max. 600 Hz                                                                       | max. 600 Hz                                                                       | max. 600 Hz                                                                        | 200 Hz                                                                              |
| DC 13                                                                             | DC 13                                                                             | DC 13                                                                              | DC 13                                                                               |
| yes                                                                               | yes                                                                               | yes                                                                                | yes                                                                                 |
| IP 67                                                                             | IP 67                                                                             | IP 67                                                                              | IP 67                                                                               |
| CuZn coated                                                                       | CuZn coated                                                                       | CuZn coated                                                                        | CuZn coated                                                                         |
| PBT                                                                               | PBT                                                                               | PBT                                                                                | PA 12                                                                               |
| 0.3 m PUR cable with connector                                                    | 2 m PVC cable                                                                     | 2 m PVC cable                                                                      | Connector                                                                           |
| 2x0.34 mm <sup>2</sup>                                                            | 2x0.34 mm <sup>2</sup>                                                            | 2x0.34 mm <sup>2</sup>                                                             |                                                                                     |
| cULus                                                                             | cULus                                                                             | cULus                                                                              | cULus                                                                               |
| BKS-S 19-13                                                                       |                                                                                   |                                                                                    | BKS-S 19-12/-S 20-12                                                                |






1.2

5

Connectors,  
Holders ...  
Page 5.2 ...

|                                           |                |                |                |
|-------------------------------------------|----------------|----------------|----------------|
| Housing size                              | <b>M30x1.5</b> | <b>M30x1.5</b> | <b>M30x1.5</b> |
| Mounting (see notes starting p. 1.0.11)   | flush          | flush          | flush          |
| Rated operating distance s <sub>n</sub>   | <b>10 mm</b>   | <b>15 mm</b>   | <b>15 mm</b>   |
| Assured operating distance s <sub>a</sub> | 0...8.1 mm     | 0...12.2 mm    | 0...12.2 mm    |

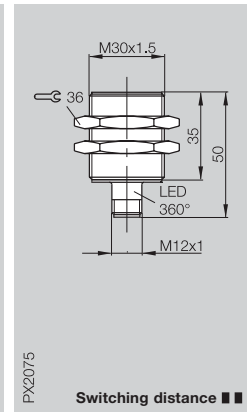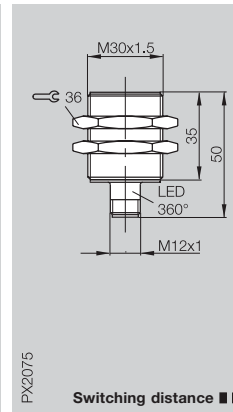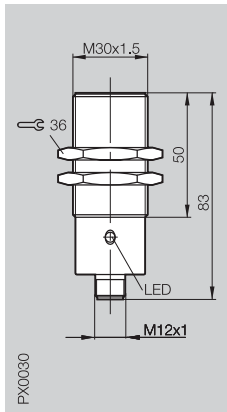


|                                               |                            |                            |                        |
|-----------------------------------------------|----------------------------|----------------------------|------------------------|
| NO ⑨ non-polarized ⑦ polarized                |                            |                            |                        |
| NC ⑩ non-polarized                            |                            |                            |                        |
|                                               | BES 516-541-S4-H           | BES M30MF-USC15B-S04K      | BES M30MF-GSC15B-S04K  |
| Supply voltage U <sub>B</sub>                 | 10...55 V DC non-polarized | 10...30 V DC non-polarized | 10...30 V DC polarized |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 5 V                      | ≤ 5 V                      | ≤ 4 V                  |
| Rated insulation voltage U <sub>i</sub>       | 250 V AC                   | 75 V DC                    | 75 V DC                |
| Rated operational current I <sub>e</sub>      | 200 mA                     | 100 mA                     | 100 mA                 |
| Minimum operating current I <sub>m</sub>      | 5 mA                       | 5 mA                       | 5 mA                   |
| Off-state current I <sub>r</sub>              | ≤ 500 μA                   | ≤ 600 μA                   | ≤ 600 μA               |
| Polarity reversal protected                   | yes                        | yes                        | yes                    |
| Short circuit protected                       | yes                        | yes                        | yes                    |
| Permissible load capacitance                  | ≤ 1 μF                     | ≤ 1 μF                     | ≤ 1 μF                 |
| Repeat accuracy R                             | ≤ 5 %                      | ≤ 5 %                      | ≤ 5 %                  |
| Ambient temperature range T <sub>a</sub>      | -25...+70 °C               | -25...+70 °C               | -25...+70 °C           |
| Switching frequency f                         | 150 Hz                     | max. 400 Hz                | max. 400 Hz            |
| Utilization category                          | DC 13                      | DC 13                      | DC 13                  |
| Function indicator                            | yes                        | yes                        | yes                    |
| Degree of protection per IEC 60529            | IP 68 per BWN Pr. 20       | IP 67                      | IP 67                  |
| Insulation class                              | □                          |                            |                        |
| Housing material                              | CuZn coated                | CuZn coated                | CuZn coated            |
| Material of sensing face                      | PA 12                      | PA 12                      | PA 12                  |
| Connection                                    | Connector                  | Connector                  | Connector              |
| No. of wires × cross-section                  |                            |                            |                        |
| Approval                                      | cULus                      | cULus                      | cULus                  |
| Recommended connector                         | BKS-S 19-12/-S 20-12       | BKS-S 19-11/-S 20-11       | BKS-S 19-13/-S 20-13   |

⑨ Wiring diagrams see page 1.0.6  
Switching distance ■■ see page 1.0.10

Other cable lengths and  
PUR cable jacket material on request.



| M30×1.5     | M30×1.5     | M30×1.5     | M30×1.5     |
|-------------|-------------|-------------|-------------|
| flush       | flush       | flush       | non-flush   |
| 15 mm       | 15 mm       | 15 mm       | 15 mm       |
| 0...12.2 mm | 0...12.2 mm | 0...12.2 mm | 0...12.2 mm |

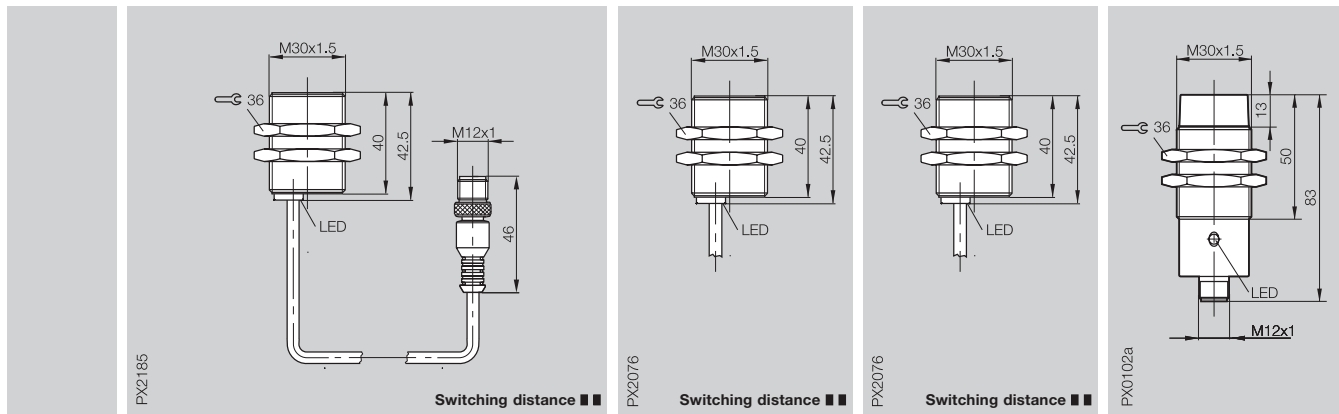

1.2

|                                |                            |                        |                            |
|--------------------------------|----------------------------|------------------------|----------------------------|
| BES M30MF-GSC15B-BP00,3-GS04   | BES M30MF-USC15B-BV02      | BES M30MF-GSC15B-BV02  | BES 516-549-S4-H           |
| 10...30 V DC polarized         | 10...30 V DC non-polarized | 10...30 V DC polarized | 10...55 V DC non-polarized |
| ≤ 4 V                          | ≤ 5 V                      | ≤ 4 V                  | ≤ 5 V                      |
| 75 V DC                        | 75 V DC                    | 75 V DC                | 250 V AC                   |
| 100 mA                         | 100 mA                     | 100 mA                 | 200 mA                     |
| 5 mA                           | 5 mA                       | 5 mA                   | 5 mA                       |
| ≤ 600 µA                       | ≤ 600 µA                   | ≤ 600 µA               | ≤ 500 µA                   |
| yes                            | yes                        | yes                    | yes                        |
| yes                            | yes                        | yes                    | yes                        |
| ≤ 1 µF                         | ≤ 1 µF                     | ≤ 1 µF                 | ≤ 1 µF                     |
| ≤ 5 %                          | ≤ 5 %                      | ≤ 5 %                  | ≤ 5 %                      |
| -25...+70 °C                   | -25...+70 °C               | -25...+70 °C           | -25...+70 °C               |
| max. 400 Hz                    | max. 400 Hz                | max. 400 Hz            | 100 Hz                     |
| DC 13                          | DC 13                      | DC 13                  | DC 13                      |
| yes                            | yes                        | yes                    | yes                        |
| IP 67                          | IP 67                      | IP 67                  | IP 68 per BWN Pr. 20       |
| CuZn coated                    | CuZn coated                | CuZn coated            | CuZn coated                |
| PA 12                          | PA 12                      | PA 12                  | PA 12                      |
| 0.3 m PUR cable with connector | 2 m PVC cable              | 2 m PVC cable          | Connector                  |
| cULus                          | 2×0.34 mm <sup>2</sup>     | 2×0.34 mm <sup>2</sup> | cULus                      |
| BKS-S 19-13                    | cULus                      | cULus                  | BKS-S 19-12/-S 20-12       |




5

Connectors,  
Holders ...  
Page 5.2 ...

|                                         |
|-----------------------------------------|
| Housing size                            |
| Mounting (see notes starting p. 1.0.11) |
| Rated operating distance $s_n$          |
| Assured operating distance $s_a$        |

|                              |
|------------------------------|
| <b>40×40×66 mm</b> Unicomact |
| flush                        |
| <b>15 mm</b>                 |
| 0...12.2 mm                  |

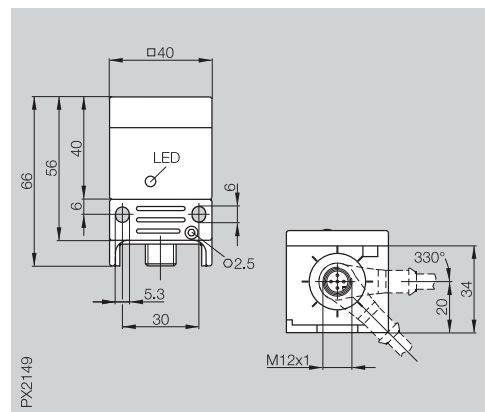

### Unicomact

The flexible sensor for machine and systems building. The detection axis can be set in 5 directions. Long switching distance in compact package.

### Maxisensor

Long switching distance with low installation height in the detection direction. Ideal for systems building and conveying equipment.

|                |
|----------------|
| NO ⑦ polarized |
| NC ⑧ polarized |

BES Q40KFU-GSH15B-S04G

|                                 |
|---------------------------------|
| Supply voltage $U_B$            |
| Voltage drop $U_d$ at $I_e$     |
| Rated insulation voltage $U_i$  |
| Rated operational current $I_e$ |
| Minimum operating current $I_m$ |
| Off-state current $I_r$         |
| Polarity reversal protected     |
| Short circuit protected         |

|                        |
|------------------------|
| 10...55 V DC polarized |
| $\leq 4.6$ V           |
| 250 V AC               |
| 100 mA                 |
| 2 mA                   |
| $\leq 800$ $\mu$ A     |
| yes                    |
| yes                    |

|                                 |
|---------------------------------|
| Repeat accuracy R               |
| Ambient temperature range $T_a$ |
| Switching frequency f           |
| Utilization category            |
| Function indicator              |

|              |
|--------------|
| $\leq 10$ %  |
| -25...+70 °C |
| 150 Hz       |
| DC 13        |
| yes          |

|                                    |
|------------------------------------|
| Degree of protection per IEC 60529 |
| Insulation class                   |
| Housing material                   |
| Material of sensing face           |
| Connection                         |


|           |
|-----------|
| IP 67     |
| □         |
| PBT       |
| PEI       |
| Connector |

Recommended connector

BKS-S 19-13/-S 20-13

⑦ Wiring diagrams see page 1.0.6

### Permissible installation variations for Unicomact








## Inductive Sensors

DC 2-wire  
Block style housings  
s<sub>n</sub> 15 mm, 50 mm

## 1.2

**BALLUFF** | 1.2.11



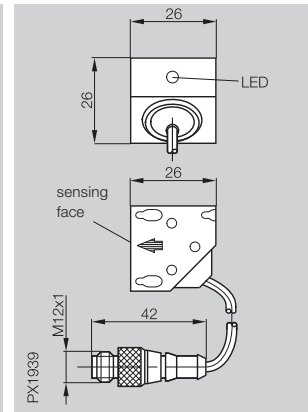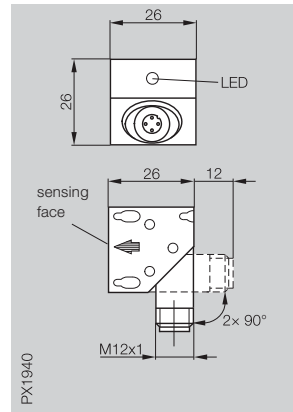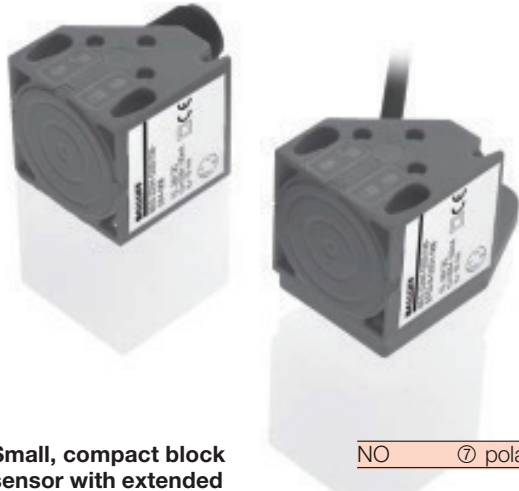

**Small, compact block  
sensor with extended  
switching distance  
for fast installation**

The connector mount is rotatable and the sensing face can be oriented in 3 directions.



Simple replacement with no loss of position thanks to the fixed mounting plate:

- Cost savings
- No special tools necessary
- Simple to install

| NO                                 | ⑦ polarized | BES Z03K-GSS10B-S04U-006 | BES Z03K-GSS10B-EP00,15-GS04-006 |
|------------------------------------|-------------|--------------------------|----------------------------------|
| Supply voltage $U_B$               |             | 10...36 V DC polarized   | 10...36 V DC polarized           |
| Voltage drop $U_d$ at $I_e$        |             | $\leq 4.5$ V             | $\leq 4.5$ V                     |
| Rated insulation voltage $U_i$     |             | 250 V AC                 | 250 V AC                         |
| Rated operational current $I_e$    |             | 100 mA                   | 100 mA                           |
| Minimum operating current $I_m$    |             | 2 mA                     | 2 mA                             |
| Off-state current $I_r$            |             | $\leq 600$ $\mu$ A       | $\leq 600$ $\mu$ A               |
| Polarity reversal protected        |             | yes                      | yes                              |
| Short circuit protected            |             | yes                      | yes                              |
| Permissible load capacitance       |             | 0.1 $\mu$ F              | 0.1 $\mu$ F                      |
| Repeat accuracy R                  |             | $\leq 10$                | $\leq 10$                        |
| Ambient temperature range $T_a$    |             | -25...+70 °C             | -25...+70 °C                     |
| Switching frequency f              |             | 250 Hz                   | 250 Hz                           |
| Utilization category               |             | DC 13                    | DC 13                            |
| Function indicator                 |             | yes                      | yes                              |
| Degree of protection per IEC 60529 |             | IP 67                    | IP 67                            |
| Insulation class                   |             | □                        | □                                |
| Housing material                   |             | PA mod.                  | PA mod.                          |
| Material of sensing face           |             | PA mod.                  | PA mod.                          |
| Connection                         |             | Connector                | 0.15 m PUR cable with connector  |
| Recommended connector              |             | BKS-S 19-13/-S 20-13     | BKS-S 19-13                      |

⑦ Wiring diagrams see page 1.0.6

**Mounting plate**  
(included in delivery)

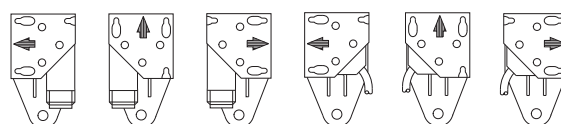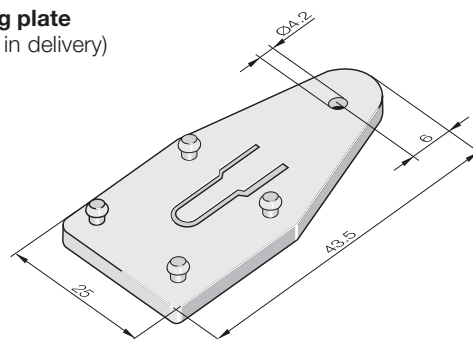

# Inductive – AC/DC 2-wire

## Our standard line in 2-wire AC/DC versions


With this broad range of product, Balluff offers proximity switches in housings from M12 to 80x80 mm for virtually any application in the field of automation.

These highest quality sensors are designed and manufactured according to worldwide standards and the latest technology. 100 % testing of all products is your assurance that only carefully checked sensors are shipped.




- 1.3.2 M12
- 1.3.3 M12, M18, M30
- 1.3.4 Block style housings

**1.3**

|                                           |              |
|-------------------------------------------|--------------|
| Housing size                              | <b>M12x1</b> |
| Mounting (see notes starting p. 1.0.11)   | flush        |
| Rated operating distance s <sub>n</sub>   | <b>2 mm</b>  |
| Assured operating distance s <sub>a</sub> | 0...1.6 mm   |

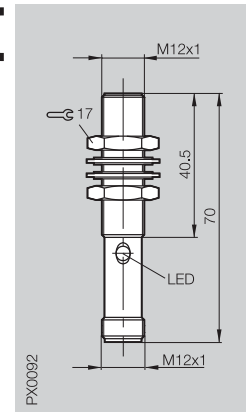

**Current reduction as a function  
of ambient temperature range**

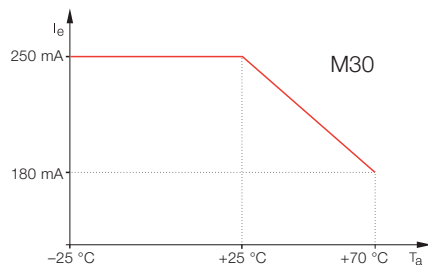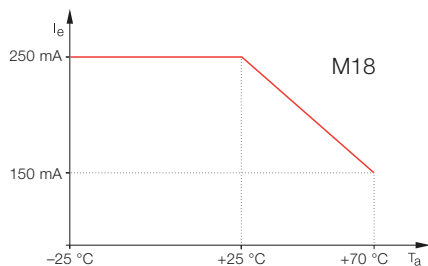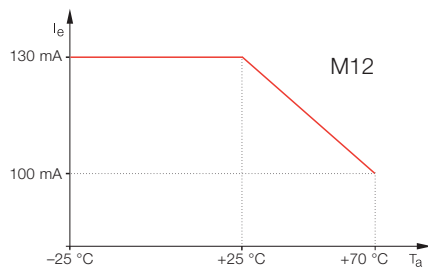

|    |    |                   |
|----|----|-------------------|
| NO | 16 | BES 516-207-S27-E |
| NC | 17 | BES 516-208-S27-E |

|                                               |                      |
|-----------------------------------------------|----------------------|
| Rated operational voltage U <sub>e</sub>      | 110 V AC             |
| Supply voltage U <sub>B</sub>                 | 20...250 V AC/DC     |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 11 V; ≤ 7.5 V dyn. |
| Rated insulation voltage U <sub>i</sub>       | 250 V AC             |
| Rated operational current I <sub>e</sub>      | 130 mA               |
| Minimum operating current I <sub>m</sub>      | 5 mA                 |
| Off-state current I <sub>r</sub>              | ≤ 1.7 mA at 110 V AC |
| Inrush current I <sub>k</sub> t ≤ 20 ms       | ≤ 0.7 A/≤ 0.5 Hz     |
| Polarity reversal protected                   | yes                  |
| Short circuit/overload protected              | yes/yes              |

|                                          |              |
|------------------------------------------|--------------|
| Repeat accuracy R                        | ≤ 5 %        |
| Ambient temperature range T <sub>a</sub> | -25...+70 °C |
| Switching frequency f                    | ≤ 1000 Hz    |
| Utilization category                     | AC 140/DC 13 |
| Function indicator                       | yes          |

|                                    |                        |
|------------------------------------|------------------------|
| Degree of protection per IEC 60529 | IP 67                  |
| Insulation class                   | with protection ground |
| Housing material                   | Stainless steel        |
| Material of sensing face           | PA 12                  |
| Connection                         | Connector              |

|                       |                   |
|-----------------------|-------------------|
| Approval              | cULus             |
| Recommended connector | BKS-S 27/BKS-S 28 |

16 Wiring diagrams see page 1.0.6


Cable versions (Insulation class 2) on request.

# M12, M18, M30

## Inductive Sensors

AC/DC 2-wire  
M12, M18, M30  
s<sub>n</sub> 4, 5, 8, 10, 15 mm

| M12x1      | M18x1      | M18x1      | M30x1.5    | M30x1.5     |
|------------|------------|------------|------------|-------------|
| non-flush  | flush      | non-flush  | flush      | non-flush   |
| 4 mm       | 5 mm       | 8 mm       | 10 mm      | 15 mm       |
| 0...3.2 mm | 0...4.1 mm | 0...6.5 mm | 0...8.1 mm | 0...12.2 mm |

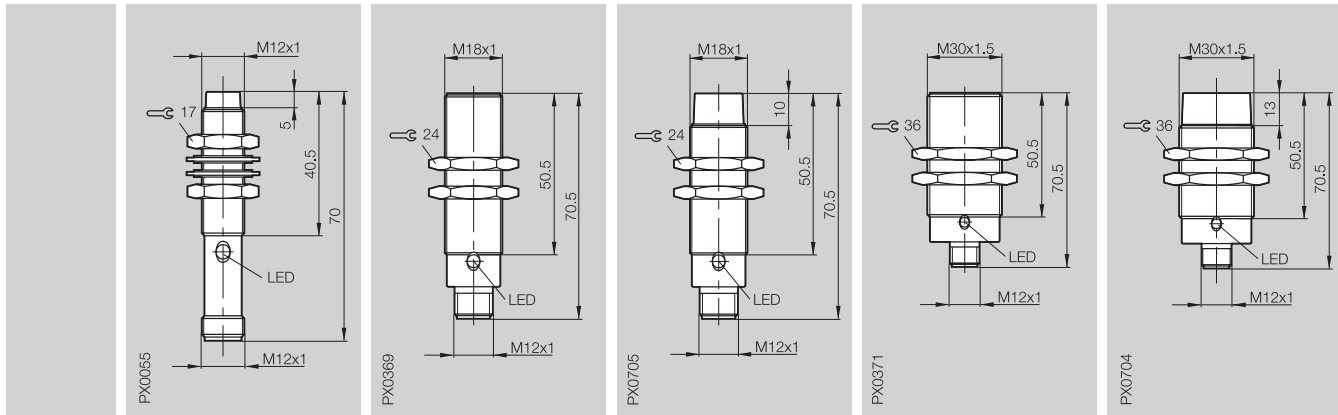

1.3



|                        |                        |                        |                        |                        |
|------------------------|------------------------|------------------------|------------------------|------------------------|
| BES 516-209-S27-E      | BES 516-211-E5-E-S27   | BES 516-213-E5-E-S27   | BES 516-215-E5-E-S27   | BES 516-217-E5-E-S27   |
| BES 516-210-S27-E      | BES 516-212-E5-E-S27   | BES 516-214-E5-E-S27   | BES 516-216-E5-E-S27   | BES 516-218-E5-E-S27   |
| 110 V AC               | 110 V AC               | 110 V AC               | 110 V AC               | 110 V AC               |
| 20...250 V AC/DC       | 20...250 V AC/DC       | 20...250 V AC/DC       | 20...250 V AC/DC       | 20...250 V AC/DC       |
| ≤ 11 V; ≤ 7.5 V dyn.   | ≤ 11 V; ≤ 7.5 V dyn.   | ≤ 11 V; ≤ 7.5 V dyn.   | ≤ 11 V; ≤ 7.5 V dyn.   | ≤ 11 V; ≤ 7.5 V dyn.   |
| 250 V AC               | 250 V AC               | 250 V AC               | 250 V AC               | 250 V AC               |
| 130 mA                 | 250 mA                 | 250 mA                 | 250 mA                 | 250 mA                 |
| 5 mA                   | 5 mA                   | 5 mA                   | 5 mA                   | 5 mA                   |
| ≤ 1.7 mA at 110 V AC   | ≤ 1.7 mA at 110 V AC   | ≤ 1.7 mA at 110 V AC   | ≤ 1.7 mA at 110 V AC   | ≤ 1.7 mA at 110 V AC   |
| ≤ 0.7 A/≤ 0.5 Hz       | ≤ 1.5 A/≤ 1 Hz         | ≤ 1.5 A/≤ 1 Hz         | ≤ 3 A/≤ 1 Hz           | ≤ 3 A/≤ 1 Hz           |
| yes                    | yes                    | yes                    | yes                    | yes                    |
| yes/yes                | yes/yes                | yes/yes                | yes/yes                | yes/yes                |
| ≤ 5 %                  | ≤ 5 %                  | ≤ 5 %                  | ≤ 10 %                 | ≤ 10 %                 |
| -25...+70 °C           | -25...+70 °C           | -25...+70 °C           | -25...+70 °C           | -25...+70 °C           |
| ≤ 600 Hz               | ≤ 400 Hz               | ≤ 250 Hz               | ≤ 150 Hz               | ≤ 100 Hz               |
| AC 140/DC 13           | AC 140/DC 13           | AC 140/DC 13           | AC 140/DC 13           | AC 140/DC 13           |
| yes                    | yes                    | yes                    | yes                    | yes                    |
| IP 67                  | IP 67                  | IP 67                  | IP 67                  | IP 67                  |
| with protection ground | with protection ground | with protection ground | with protection ground | with protection ground |
| Stainless steel        | CuZn coated            | CuZn coated            | CuZn coated            | CuZn coated            |
| PA 12                  | PA 12                  | PA 12                  | PA 12                  | PA 12                  |
| Connector              | Connector              | Connector              | Connector              | Connector              |
| cULus                  | cULus                  | cULus                  | cULus                  | cULus                  |
| BKS-S 27/BKS-S 28      | BKS-S 27/BKS-S 28      | BKS-S 27/BKS-S 28      | BKS-S 27/BKS-S 28      | BKS-S 27/BKS-S 28      |



5

Connectors,  
Holders ...  
Page 5.2 ...

|                                                 |                        |                        |
|-------------------------------------------------|------------------------|------------------------|
| Housing size                                    | <b>26x40x12 mm</b> R05 | <b>26x40x12 mm</b> R05 |
| Mounting (see notes starting p. <b>1.0.11</b> ) | flush                  | flush                  |
| Rated operating distance $s_n$                  | <b>2 mm</b>            | <b>4 mm</b>            |
| Assured operating distance $s_a$                | 0...1.6 mm             | 0...3.2 mm             |

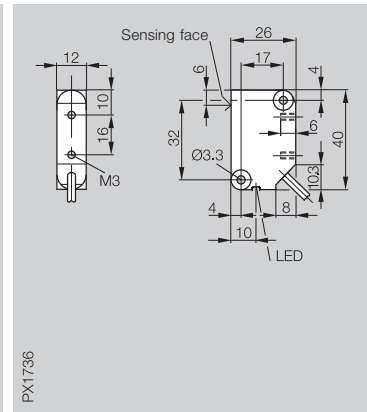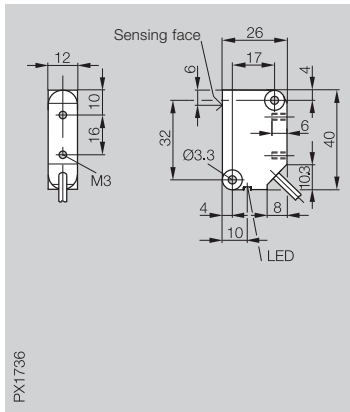


| NO                                            | ⑬ | BES R05KB-USU20B-EV02  | BES R05KB-USU40B-EV02  |
|-----------------------------------------------|---|------------------------|------------------------|
| Rated operational voltage U <sub>e</sub>      |   | 110 V AC               | 110 V AC               |
| Supply voltage U <sub>B</sub>                 |   | 20...250 V AC/DC       | 20...250 V AC/DC       |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> |   | ≤ 12 V; ≤ 8.5 V dyn.   | ≤ 12 V; ≤ 8.5 V dyn.   |
| Rated insulation voltage U <sub>i</sub>       |   | 250 V AC               | 250 V AC               |
| Rated operational current I <sub>e</sub>      |   | 130 mA                 | 130 mA                 |
| Minimum operating current I <sub>m</sub>      |   | 5 mA                   | 5 mA                   |
| Off-state current I                           |   | ≤ 1.7 mA at 110 V AC   | ≤ 1.7 mA at 110 V AC   |
| Inrush current I <sub>k</sub> t ≤ 20 ms       |   | ≤ 0.7 A/≤ 0.5 Hz       | ≤ 0.7 A/≤ 0.5 Hz       |
| Polarity reversal protected                   |   | yes                    | yes                    |
| Short circuit/overload protected              |   | yes/yes                | yes/yes                |
| Repeat accuracy R                             |   | ≤ 5 %                  | ≤ 5 %                  |
| Ambient temperature range T <sub>a</sub>      |   | -25...+70 °C           | -25...+70 °C           |
| Switching frequency f                         |   | 400 Hz                 | 400 Hz                 |
| Utilization category                          |   | AC 140/DC 13           | AC 140/DC 13           |
| Function indicator                            |   | yes                    | yes                    |
| Degree of protection per IEC 60529            |   | IP 67                  | IP 67                  |
| Insulation class                              |   | □                      | □                      |
| Housing material                              |   | PA 12                  | PA 12                  |
| Material of sensing face                      |   | PA 12                  | PA 12                  |
| Connection                                    |   | 2 m PVC cable          | 2 m PVC cable          |
| No. of wires × cross-section                  |   | 2×0.34 mm <sup>2</sup> | 2×0.34 mm <sup>2</sup> |

⑬ Wiring diagrams see page **1.0.6**

Other cable lengths and PUR cable jacket material on request.

## Row mounting



- for plastics or without existing material in the space  
= Distance A at least 5 mm
- for metal in the space  
= Distance A at least 4 mm




# 40x40x73 mm


## Inductive Sensors

AC/DC 2-wire  
Block style housings  
s<sub>n</sub> 15 mm, 20/25 mm

|                                           |                              |                                  |
|-------------------------------------------|------------------------------|----------------------------------|
| Housing size                              | <b>40x40x73 mm</b> Unicompat | <b>40x40x73 mm</b> Unicompat     |
| Mounting (see notes starting p. 1.0.11)   | flush                        | non-flush                        |
| Rated operating distance s <sub>n</sub>   | <b>15 mm</b>                 | <b>mount. dependent 20/25 mm</b> |
| Assured operating distance s <sub>a</sub> | 0...12.2 mm                  | 0...16.2/0...20.3 mm             |

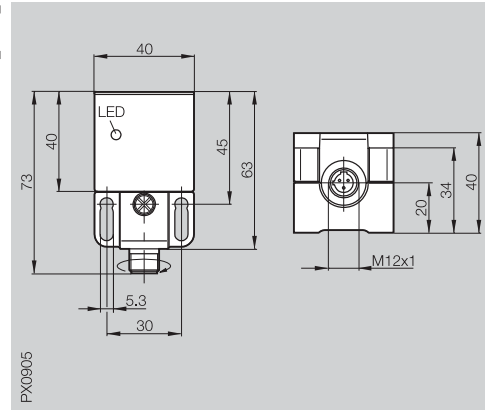


1.3

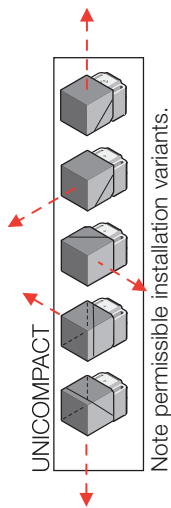

| NO                                            | ⑩ | BES Q40KEU-USU15B-S27G | BES Q40KEU-USU25F-S27G                                                 |
|-----------------------------------------------|---|------------------------|------------------------------------------------------------------------|
| Rated operational voltage U <sub>o</sub>      |   | 110 V AC               | 110 V AC                                                               |
| Supply voltage U <sub>B</sub>                 |   | 20...250 V AC/DC       | 20...250 V AC/DC                                                       |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> |   | ≤ 11 V; ≤ 7.5 V dyn.   | ≤ 11 V; ≤ 7.5 V dyn.                                                   |
| Rated insulation voltage U <sub>i</sub>       |   | 250 V AC               | 250 V AC                                                               |
| Rated operational current I <sub>e</sub>      |   | 250 mA                 | 250 mA                                                                 |
| Minimum operating current I <sub>m</sub>      |   | 5 mA                   | 5 mA                                                                   |
| Off-state current I                           |   | ≤ 1.7 mA at 110 V AC   | ≤ 1.7 mA at 110 V AC                                                   |
| Inrush current I <sub>k</sub> t ≤ 20 ms       |   | ≤ 2 A/≤ 1 Hz           | ≤ 2 A/≤ 1 Hz                                                           |
| Polarity reversal protected                   |   | yes                    | yes                                                                    |
| Short circuit/overload protected              |   | yes/yes                | yes/yes                                                                |
| Repeat accuracy R                             |   | ≤ 5 %                  | ≤ 5 %                                                                  |
| Ambient temperature range T <sub>a</sub>      |   | -25...+70 °C           | -25...+70 °C                                                           |
| Switching frequency f                         |   | 100 Hz                 | 100 Hz                                                                 |
| Utilization category                          |   | AC 140/DC 13           | AC 140/DC 13                                                           |
| Function indicator                            |   | yes                    | yes                                                                    |
| Degree of protection per IEC 60529            |   | IP 67                  | IP 67                                                                  |
| Insulation class                              |   | with protection ground | with protection ground                                                 |
| Housing material                              |   | PBT/GD-ZnAl            | PBT/GD-ZnAl                                                            |
| Material of sensing face                      |   | PBT                    | PBT                                                                    |
| Connection                                    |   | Connector              | Connector                                                              |
| Recommended connector                         |   | BKS-S 27/BKS-S 28      | BKS-S 27/BKS-S 28                                                      |
| possible mounting options                     |   | Fig. 1 to 6            | s <sub>n</sub> 20 mm Fig. 4 and 6<br>s <sub>n</sub> 25 mm Fig. 3 and 5 |

### Current reduction as a function of ambient temperature range

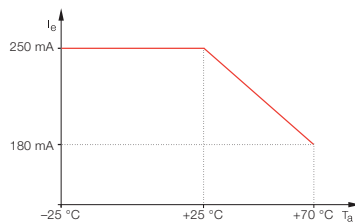

⑩ Wiring diagrams see page 1.0.6

### Mounting options




Fig. 1



Fig. 2



Fig. 3



Fig. 4




Fig. 5



Fig. 6

### Row mounting

flush 80 mm  
non-flush 120 mm




5

Connectors ...  
page 5.2 ...

## Inductive Sensors


AC/DC 2-wire  
Block style housings  
 $s_n$  15 mm, 30 mm

40×40×120 mm

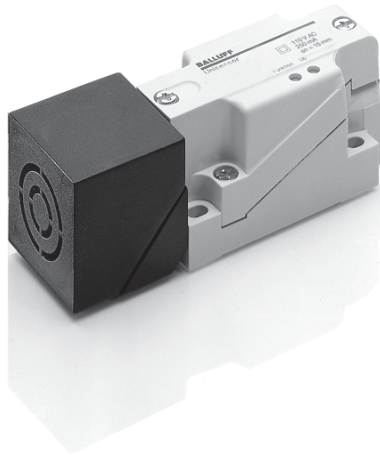


### Programmable Unisensor

Unisensors can be set for normally open and normally closed function. A wire jumper is used to change the setting.

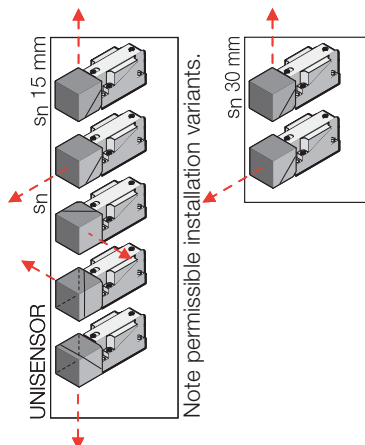

**Row mounting**  
flush 80 mm  
non-flush 120 mm



### Mounting options




Fig. 1




Fig. 2




Fig. 3




Fig. 4




Fig. 5







Fig. 6

|                                         |
|-----------------------------------------|
| Housing size                            |
| Mounting (see notes starting p. 1.0.11) |
| Rated operating distance $s_n$          |
| Assured operating distance $s_a$        |

|                               |
|-------------------------------|
| <b>40×40×120 mm</b> Unisensor |
| flush                         |
| <b>15 mm</b>                  |
| 0...12.2 mm                   |


|                               |
|-------------------------------|
| <b>40×40×120 mm</b> Unisensor |
| non-flush                     |
| <b>30 mm</b>                  |
| 0...24.3 mm                   |

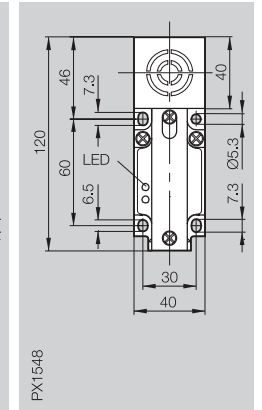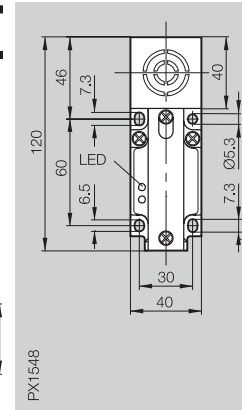

|                                     |   |                                  |                                |
|-------------------------------------|---|----------------------------------|--------------------------------|
| NO/NC programmable                  | ⑮ | BES 517-223-M3-E                 | BES 517-223-M5-E               |
| Rated operational voltage $U_o$     |   | 110 V AC                         | 110 V AC                       |
| Supply voltage $U_s$                |   | 20...250 V AC/DC                 | 20...250 V AC/DC               |
| Voltage drop $U_d$ at $I_o$         |   | $\leq 11.5$ V; $\leq 7.5$ V dyn. | $\leq 12.5$ V; $\leq 9$ V dyn. |
| Rated insulation voltage $U_i$      |   | 250 V AC                         | 250 V AC                       |
| Rated operational current $I_o$     |   | 250 mA                           | 250 mA                         |
| Minimum operating current $I_m$     |   | 5 mA                             | 5 mA                           |
| Off-state current $I_r$             |   | $\leq 1.7$ mA at 110 V AC        | $\leq 1.7$ mA at 110 V AC      |
| Inrush current $I_k$ $t \leq 20$ ms |   | $\leq 1$ A/ $\leq 1$ Hz          | $\leq 1$ A/ $\leq 1$ Hz        |
| Polarity reversal protected         |   | yes                              | yes                            |
| Short circuit/overload protected    |   | yes/yes                          | yes/yes                        |
| Repeat accuracy R                   |   | $\leq 5$ %                       | $\leq 5$ %                     |
| Ambient temperature range $T_a$     |   | -25...+70 °C                     | -25...+70 °C                   |
| Switching frequency f               |   | $\leq 100$ Hz                    | $\leq 100$ Hz                  |
| Utilization category                |   | AC 140/DC 13                     | AC 140/DC 13                   |
| Function/Supply voltage indicator   |   | yes/no                           | yes/no                         |
| Degree of protection per IEC 60529  |   | IP 67                            | IP 67                          |
| Insulation class                    |   | □                                | □                              |
| Housing material                    |   | PBT                              | PBT                            |
| Material of sensing face            |   | PBT                              | PBT                            |
| Connection                          |   | Screw terminals                  | Screw terminals                |
| max. wire cross-section             |   | $\leq 2.5$ mm <sup>2</sup>       | $\leq 2.5$ mm <sup>2</sup>     |
| Approval                            |   | cULus                            | cULus                          |
| possible mounting options           |   | Fig. 1 to 6                      | Fig. 4 and 5                   |

⑮ Wiring diagrams see page 1.0.6

### Current reduction as a function of ambient temperature range

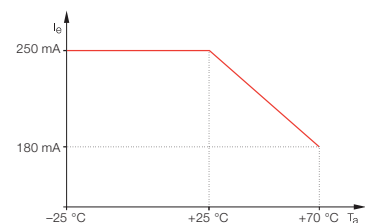




# 80×80×40 mm

## Inductive Sensors

AC/DC 2-wire  
Block style housings  
s<sub>n</sub> 40 mm, 50 mm

| Housing size                              | 80×80×40 mm Maxisensor | 80×80×40 mm Maxisensor |
|-------------------------------------------|------------------------|------------------------|
| Mounting (see notes starting p. 1.0.11)   | non-flush              | non-flush              |
| Rated operating distance s <sub>n</sub>   | <b>40 mm</b>           | <b>50 mm</b>           |
| Assured operating distance s <sub>a</sub> | 0...32.4 mm            | 0...40.5 mm            |

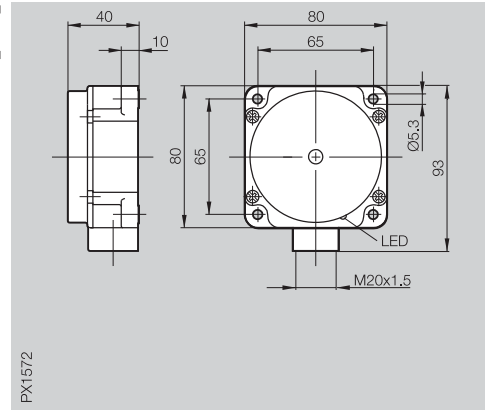

PX1572

### Maxisensor programmable

Maxisensors can be set for normally open and normally closed function. A wire contact is used to change the setting.

### Mounting in non-ferrous metals




Fig. 1

### Mounting in steel/non-ferrous metals




Fig. 2

| NO/NC programmable                            | ⑮ | BES 517-224-M4-E      | BES 517-224-M5-E      |
|-----------------------------------------------|---|-----------------------|-----------------------|
| Rated operational voltage U <sub>o</sub>      |   | 110 V AC              | 110 V AC              |
| Supply voltage U <sub>B</sub>                 |   | 20...250 V AC/DC      | 20...250 V AC/DC      |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> |   | ≤ 11 V; ≤ 7.5 V dyn.  | ≤ 11 V; ≤ 7.5 V dyn.  |
| Rated insulation voltage U <sub>i</sub>       |   | 250 V AC              | 250 V AC              |
| Rated operational current I <sub>e</sub>      |   | 250 mA                | 250 mA                |
| Minimum operating current I <sub>m</sub>      |   | 5 mA                  | 5 mA                  |
| Off-state current I <sub>o</sub>              |   | ≤ 1.7 mA at 110 V AC  | ≤ 1.7 mA at 110 V AC  |
| Inrush current I <sub>k</sub> t ≤ 20 ms       |   | ≤ 1 A/≤ 1 Hz          | ≤ 1 A/≤ 1 Hz          |
| Polarity reversal protected                   |   | yes                   | yes                   |
| Short circuit/overload protected              |   | yes/yes               | yes/yes               |
| Repeat accuracy R                             |   | ≤ 5 %                 | ≤ 5 %                 |
| Ambient temperature range T <sub>a</sub>      |   | -25...+70 °C          | -25...+70 °C          |
| Switching frequency f                         |   | ≤ 10 Hz               | ≤ 10 Hz               |
| Utilization category                          |   | AC 140/DC 13          | AC 140/DC 13          |
| Function indicator                            |   | yes                   | yes                   |
| Degree of protection per IEC 60529            |   | IP 67                 | IP 67                 |
| Insulation class                              |   | □                     | □                     |
| Housing material                              |   | PBT                   | PBT                   |
| Material of sensing face                      |   | PBT                   | PBT                   |
| Connection                                    |   | Screw terminals       | Screw terminals       |
| max. wire cross-section                       |   | ≤ 2.5 mm <sup>2</sup> | ≤ 2.5 mm <sup>2</sup> |
| Approval                                      |   | cULus                 | cULus                 |
| possible mounting options                     |   | Fig. 1 and 2          | Fig. 2                |

⑮ Wiring diagrams see page 1.0.6


1.3

5

Connectors,  
mounting  
plate ...  
page 5.2 ...





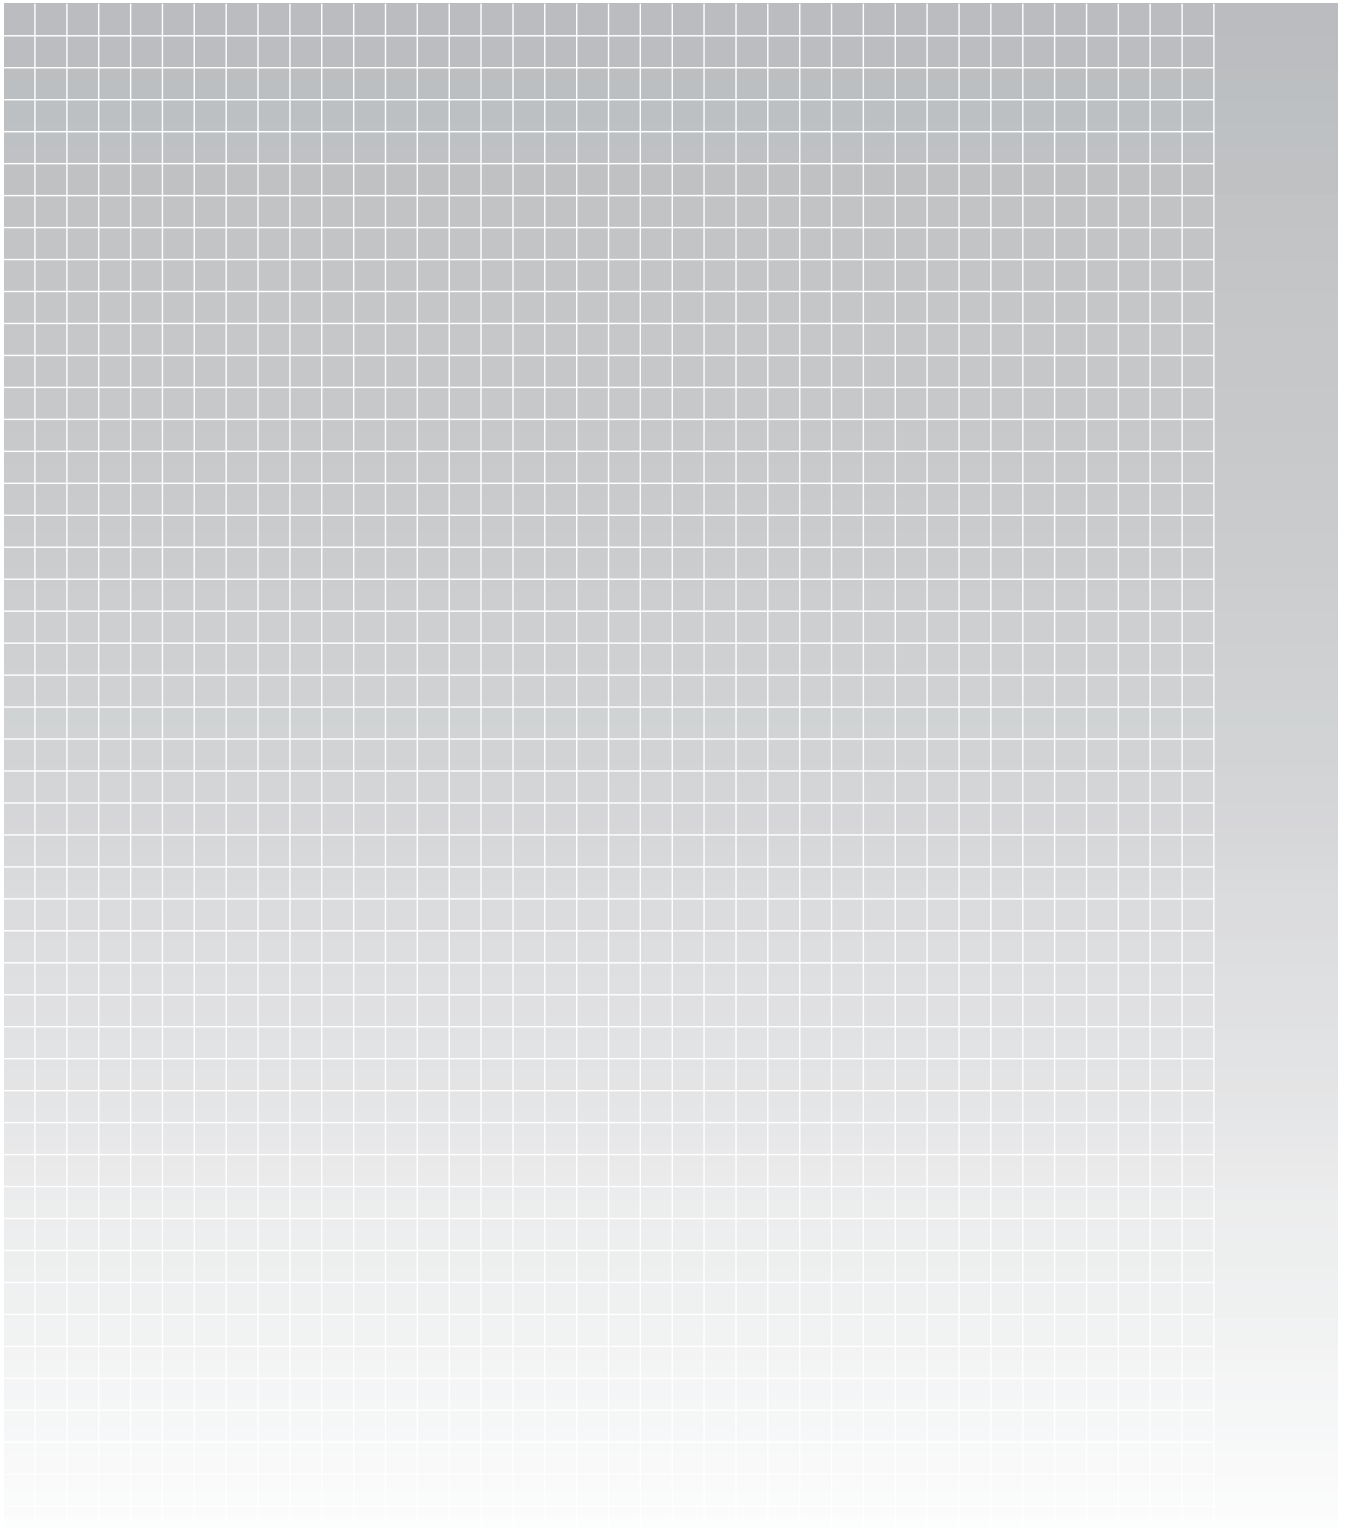

## Inductive – AC 2-wire

### Our standard line in 2-wire AC

Balluff offers AC  
sensors in M12, M18  
and M30 size.

**1.4.2** M12

**1.4.3** M12, M18, M30

**1.4**

AC sensors are optimized for processors and controllers having an AC voltage input.

These sensors are used mainly in Asia and America.


As long as the rated operating current is maintained, these sensors can be used for directly driving contactors and relays.

#### Recommendation

Short circuit protection:  
Miniature fuse per  
IEC 60127-2 Sheet 1,  
≤ 2 A (fast acting). See  
wiring diagrams.

After a short circuit  
check the unit for reliable  
function.

|                                           |              |
|-------------------------------------------|--------------|
| Housing size                              | <b>M12x1</b> |
| Mounting (see notes starting p. 1.0.11)   | flush        |
| Rated operating distance s <sub>n</sub>   | <b>2 mm</b>  |
| Assured operating distance s <sub>a</sub> | 0...1.6 mm   |

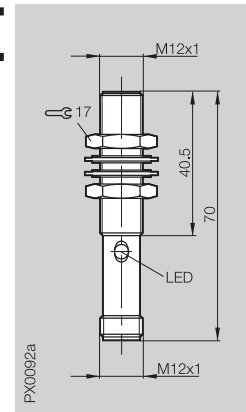


|                                               |                        |                          |
|-----------------------------------------------|------------------------|--------------------------|
| <b>NO</b>                                     | <b>⑩</b>               | <b>BES 516-449-S27-L</b> |
| Supply voltage U <sub>B</sub>                 | 20...250 V AC          |                          |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 4 V                  |                          |
| Rated insulation voltage U <sub>i</sub>       | 250 V AC               |                          |
| Rated operational current I <sub>e</sub>      | 500 mA                 |                          |
| Polarity reversal protected                   | yes                    |                          |
| Short circuit protected                       | no                     |                          |
| Repeat accuracy R                             | ≤ 5 %                  |                          |
| Ambient temperature range T <sub>a</sub>      | -25...+70 °C           |                          |
| Switching frequency f                         | 25 Hz                  |                          |
| Utilization category                          | AC 140                 |                          |
| Function indicator                            | yes                    |                          |
| Degree of protection per IEC 60529            | IP 67                  |                          |
| Insulation class                              | with protection ground |                          |
| Housing material                              | CuZn coated            |                          |
| Material of sensing face                      | PA 12                  |                          |
| Connection                                    | Connector              |                          |
| No. of wires × cross-section                  |                        |                          |
| Approval                                      | cULus                  |                          |
| Recommended connector                         | BKS-S 27/BKS-S 28      |                          |

⑩ Wiring diagrams see page 1.0.6

Other cable lengths on request.

| M12×1      | M18×1      | M18×1      | M30×1.5    | M30×1.5    |
|------------|------------|------------|------------|------------|
| flush      | flush      | flush      | flush      | flush      |
| 2 mm       | 5 mm       | 5 mm       | 10 mm      | 10 mm      |
| 0...1.6 mm | 0...4.1 mm | 0...4.1 mm | 0...8.1 mm | 0...8.1 mm |

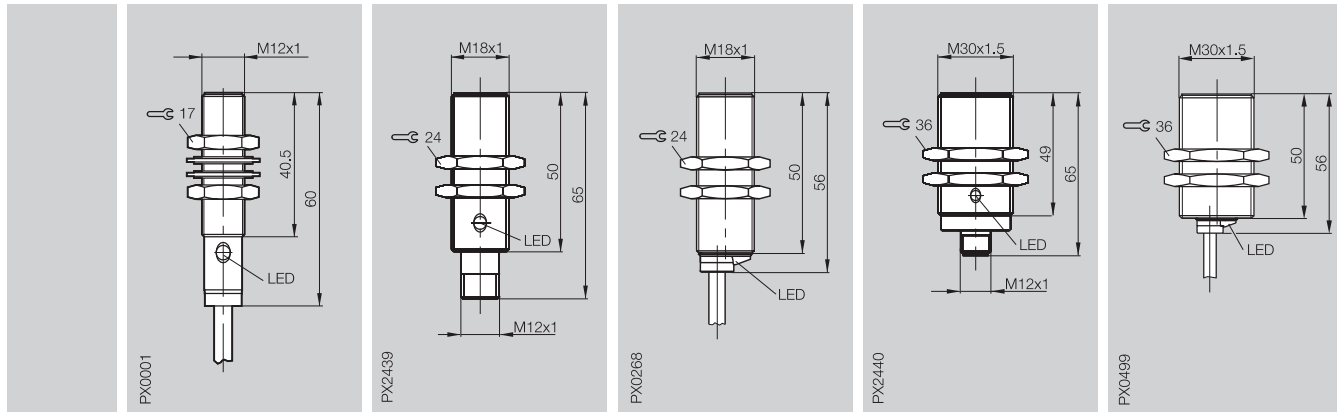


1.4


| BES 516-449-BO-L-02    | BES 516-420-E5-L-S27   | BES 516-420-E4-L-02    | BES 516-418-E5-L-S27   | BES 516-418-E4-L-02    |
|------------------------|------------------------|------------------------|------------------------|------------------------|
| 20...250 V AC          | 20...250 V AC          | 20...250 V AC          | 20...250 V AC          | 20...250 V AC          |
| ≤ 4 V                  | ≤ 4 V                  | ≤ 4 V                  | ≤ 4 V                  | ≤ 4 V                  |
| 250 V AC               | 250 V AC               | 250 V AC               | 250 V AC               | 250 V AC               |
| 500 mA                 | 500 mA                 | 500 mA                 | 500 mA                 | 500 mA                 |
| yes                    | yes                    | yes                    | yes                    | yes                    |
| no                     | no                     | no                     | no                     | no                     |
| ≤ 5 %                  | ≤ 5 %                  | ≤ 5 %                  | ≤ 5 %                  | ≤ 5 %                  |
| -25...+70 °C           | -25...+70 °C           | -25...+70 °C           | -25...+70 °C           | -25...+70 °C           |
| 25 Hz                  | 25 Hz                  | 25 Hz                  | 25 Hz                  | 10 Hz                  |
| AC 140                 | AC 140                 | AC 140                 | AC 140                 | AC 140                 |
| yes                    | yes                    | yes                    | yes                    | yes                    |
| IP 67                  | IP 67                  | IP 67                  | IP 67                  | IP 67                  |
|                        | with protection ground |                        | with protection ground |                        |
| CuZn coated            | CuZn coated            | CuZn coated            | CuZn coated            | CuZn coated            |
| PA 12                  | PA 12                  | PA 12                  | PA 12                  | PA 12                  |
| 2 m PVC cable          | Connector              | 2 m PVC cable          | Connector              | 2 m PVC cable          |
| 2x0.34 mm <sup>2</sup> |                        | 2x0.34 mm <sup>2</sup> |                        | 2x0.34 mm <sup>2</sup> |
| cULus                  | cULus                  | cULus                  | cULus                  | cULus                  |
|                        | BKS-S 27/BKS-S 28      |                        | BKS-S 27/BKS-S 28      |                        |



5

Connectors,  
Holders ...  
Page 5.2 ...

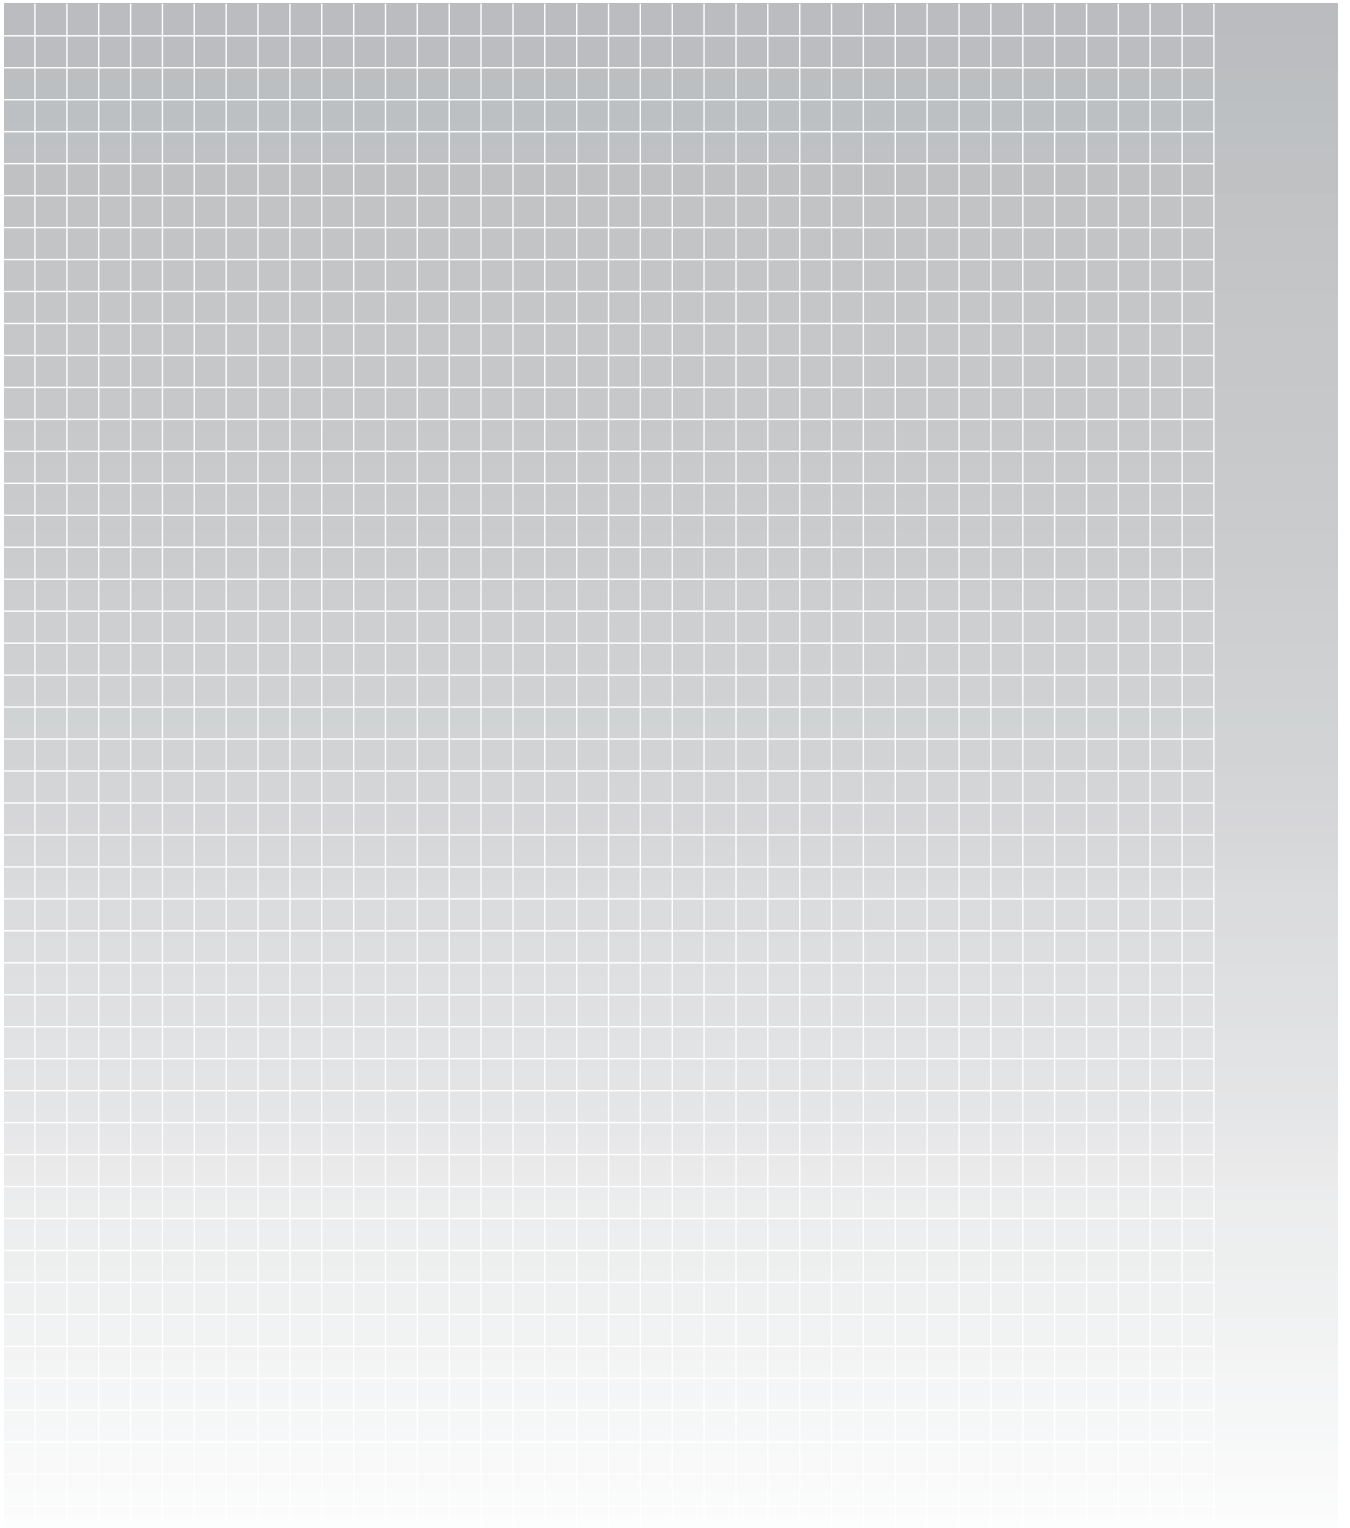

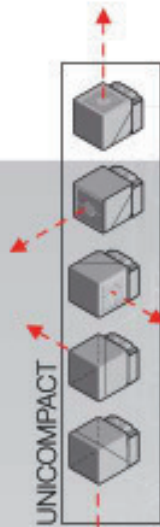

Factor 1

DESINA

**Diagnostic**

pressure rated

high pressure rated

**STEELFACE**

magnetic field



**NAMUR**

immune

weld immune

temperature rated

extended switching distance

**PROXINOX®**

Ring Sensors



# Inductive – Special Properties

Inductive sensors with special mechanical and/or electrical properties.

- Use under extremely harsh conditions
- Resistant to coolants and lubricants
- Use in welding systems, magnetic field immune
- Use in hydraulic systems, high pressure rated to 500 bar
- For use in the food and chemicals industries, stainless steel housing
- Use in error monitoring, self-diagnostic
- Use at high ambient temperatures up to +120 °C

**1.5.2** Factor 1 sensors with no reduction factor

**1.5.4** Weld- and magnetic field immune sensors for welding environments

**1.5.12** Magnetic field immune sensors, desensitized to magnetic fields

**1.5.14** Desina diagnostic sensors for machine tools, dynamic function diagnostics

**1.5.20** Steelface, sensors for extreme applications

**1.5.22** Pressure rated sensors up to max. 500 bar

**1.5.32** High-pressure rated sensors High-End and ATEX conformal

**1.5.40** NAMUR sensors for standard applications in Ex zones (ATEX conformal)

**1.5.42** Temperature rated sensors up to max. +120 °C

**1.5.44** PROXINOX® stainless steel sensors for the food industry

**1.5.50** Ring sensors

**1.5.52** Sensors with large housings and extended switching distance

**1.5**

Factor 1  
Weld immune  
Magnetic field immune  
Diagnostic  
Steelface  
Pressure rated  
Pressure rated Ex  
Namur Ex  
Temperature rated  
PROXINOX®  
Ring Sensors  
Extended switching distance

## Inductive Sensors

DC 3-/4-wire  
Block style housings  
 $s_n$  15 mm, 20 mm





### Factor 1 Sensors

detect objects such as steel, aluminum or brass at the same switching distance (no reduction factor).

This property offers advantages in applications where the material of the target object can vary.

In addition, all Factor 1 sensors are **magnetic field immune**.

Their function is not impaired by strong electromagnetic fields (such as from induction hardening or welding equipment).  
The switching response of Factor 1 sensors is unaffected by weld currents of up to 25 kA (at a distance from energetic conductors of approx. 5 cm).
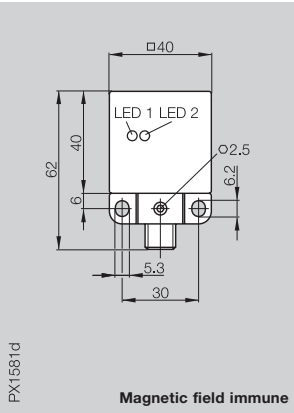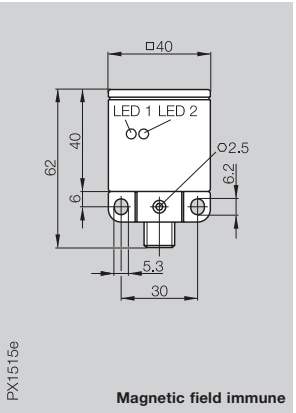
| Housing size                                                                                                                                                           |               | 40×40×62 mm Unicomcompact                                                                                           | 40×40×62 mm Unicomcompact |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|---------------------------------------------------------------------------------------------------------------------|---------------------------|
| Mounting (see notes starting p. 1.0.11)                                                                                                                                |               | flush                                                                                                               | flush                     |
| Rated operating distance $s_n$                                                                                                                                         |               | 15 mm                                                                                                               | 20 mm                     |
| Assured operating distance $s_a$                                                                                                                                       |               | 0...12.2 mm                                                                                                         | 0...16.2 mm               |
| <br> |               | <br><b>Magnetic field immune</b>  |                           |
|                                                                                                                                                                        |               | <br><b>Magnetic field immune</b> |                           |
| PNP                                                                                                                                                                    | NO            | BES Q40KFU-PSC15A-S04G                                                                                              | BES Q40KFU-PSC20A-S04G    |
|                                                                                                                                                                        | complementary | BES Q40KFU-PAC15A-S04G                                                                                              | BES Q40KFU-PAC20A-S04G    |
| Supply voltage $U_B$                                                                                                                                                   |               | 10...30 V DC                                                                                                        | 10...30 V DC              |
| Voltage drop $U_d$ at $I_e$                                                                                                                                            |               | ≤ 2.5 V                                                                                                             | ≤ 2.5 V                   |
| Rated insulation voltage $U_i$                                                                                                                                         |               | 250 V AC                                                                                                            | 250 V AC                  |
| Rated operational current $I_e$                                                                                                                                        |               | 200 mA                                                                                                              | 200 mA                    |
| No-load supply current $I_o$ max.                                                                                                                                      |               | ≤ 20 mA                                                                                                             | ≤ 20 mA                   |
| Polarity reversal protected                                                                                                                                            |               | yes                                                                                                                 | yes                       |
| Short circuit protected                                                                                                                                                |               | yes                                                                                                                 | yes                       |
| Repeat accuracy R                                                                                                                                                      |               | ≤ 5 %                                                                                                               | ≤ 5 %                     |
| Ambient temperature range $T_a$                                                                                                                                        |               | -25...+70 °C                                                                                                        | -25...+70 °C              |
| Switching frequency f                                                                                                                                                  |               | 400 Hz                                                                                                              | 400 Hz                    |
| Utilization category                                                                                                                                                   |               | DC 13                                                                                                               | DC 13                     |
| Function/Supply voltage indicator                                                                                                                                      |               | yes/yes                                                                                                             | yes/yes                   |
| Degree of protection per IEC 60529                                                                                                                                     |               | IP 67                                                                                                               | IP 67                     |
| Insulation class                                                                                                                                                       |               | □                                                                                                                   | □                         |
| Housing material                                                                                                                                                       |               | PBT                                                                                                                 | PBT                       |
| Material of sensing face                                                                                                                                               |               | PBT                                                                                                                 | PBT                       |
| Connection                                                                                                                                                             |               | Connector                                                                                                           | Connector                 |
| Approval                                                                                                                                                               |               | cULus                                                                                                               | cULus                     |
| Recommended connector                                                                                                                                                  |               | BKS- _ 19/BKS- _ 20                                                                                                 | BKS- _ 19/BKS- _ 20       |

① Wiring diagrams see page 1.0.6

#### Mounting socket

**BES Q40-HW-2**  
Material: Metal.  
Can be used in place of original mounting socket.  
Please note mounting options!

#### Mounting bracket


**BES Q40-HW-1**  
Material: Metal for flexible installation.

#### Protective cover

**BES Q40-SH-2**  
Material: PA 6 as step protection.

#### Weld protection

**BES Q40-SH-1**  
Material: Metal.  
For applications directly in the weld area.  
Only for BES Q40KFU-...A-...!

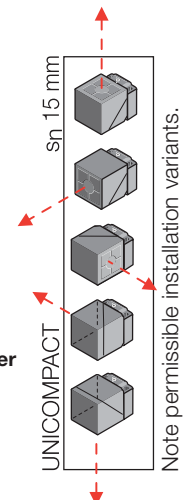


Please order accessories separately!



# Factor 1 Inductive Sensors

DC 3-/4-wire  
Block style housings  
s<sub>n</sub> 25 mm, 35 mm, 40 mm

| 40x40x62 mm Unicomact<br>Single-sided flush/non-flush | 40x40x62 Unicomact<br>Single-sided flush/non-flush | 40x40x62 mm Unicomact<br>non-flush | 40x40x62 mm Unicomact<br>non-flush |
|-------------------------------------------------------|----------------------------------------------------|------------------------------------|------------------------------------|
| <b>25 mm</b>                                          | <b>35 mm</b>                                       | <b>35 mm</b>                       | <b>40 mm</b>                       |
| 0...20.3 mm                                           | 0...28.4 mm                                        | 0...28.4 mm                        | 0...32.4 mm                        |

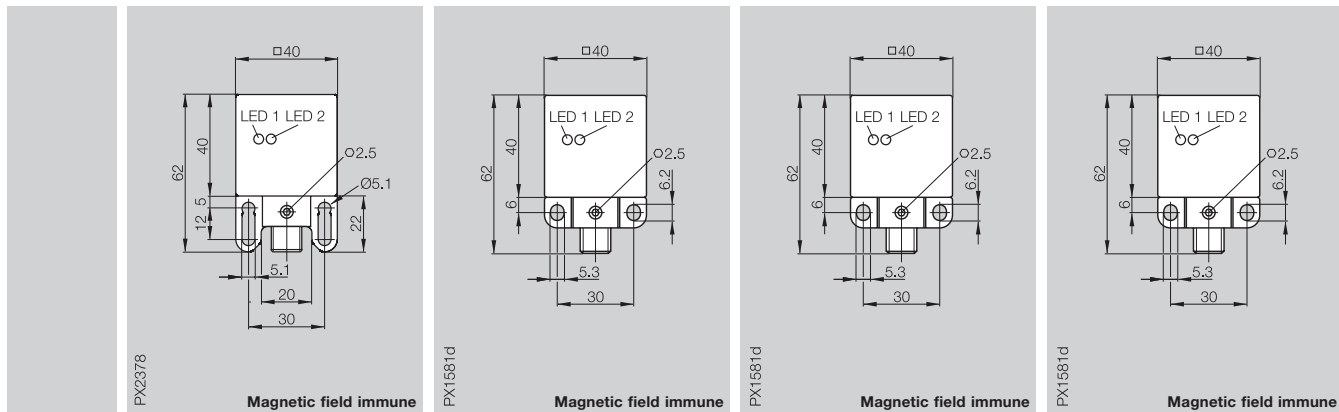

| BES Q40KGU-PAC25Z-S04G-011 | BES Q40KFU-PSC35Z-S04G-011 | BES Q40KFU-PSC35E-S04G<br>BES Q40KFU-PAC35E-S04G | BES Q40KFU-PAC40E-S04G |
|----------------------------|----------------------------|--------------------------------------------------|------------------------|
| 10...30 V DC               | 10...30 V DC               | 10...30 V DC                                     | 10...30 V DC           |
| ≤ 2.5 V                    | ≤ 2.5 V                    | ≤ 2.5 V                                          | ≤ 2.5 V                |
| 250 V AC                   | 250 V AC                   | 250 V AC                                         | 250 V AC               |
| 200 mA                     | 200 mA                     | 200 mA                                           | 200 mA                 |
| ≤ 20 mA                    | ≤ 20 mA                    | ≤ 20 mA                                          | ≤ 20 mA                |
| yes                        | yes                        | yes                                              | yes                    |
| yes                        | yes                        | yes                                              | yes                    |
| ≤ 5 %                      | ≤ 5 %                      | ≤ 5 %                                            | ≤ 5 %                  |
| -25...+70 °C               | -10...+60 °C               | -10...+70 °C                                     | -10...+70 °C           |
| 250 Hz                     | 250 Hz                     | 250 Hz                                           | 100 Hz                 |
| DC 13                      | DC 13                      | DC 13                                            | DC 13                  |
| yes/yes                    | yes/yes                    | yes/yes                                          | yes/yes                |
| IP 67                      | IP 67                      | IP 67                                            | IP 67                  |
| PBT                        | PBT                        | PBT                                              | PBT                    |
| PBT                        | PBT                        | PBT                                              | PBT                    |
| Connector                  | Connector                  | Connector                                        | Connector              |
| cULus                      | cULus                      | cULus                                            | cULus                  |
| BKS-S 19/BKS-S 20          | BKS- 19/BKS- 20            | BKS- 19/BKS- 20                                  | BKS- 19/BKS- 20        |

**1.5**


**Factor 1**  
Weld immune  
**Magnetic field immune**  
Diagnostic  
Steelface  
Pressure rated  
Pressure rated Ex  
Namur Ex  
Temperature rated  
PROXINOX®  
Ring Sensors  
Extended switching distance

## Permissible mounting options

| Rated operating distance s <sub>n</sub> | Attached using                       | permissible |     |     |     |     |     |     |      |
|-----------------------------------------|--------------------------------------|-------------|-----|-----|-----|-----|-----|-----|------|
| 15 mm                                   | Original mounting socket (plastic)   | yes         | yes | yes | yes | yes | yes | yes | yes  |
|                                         | Mounting socket BES Q40-HW-2 (metal) | yes         | yes | yes | yes | yes | yes | yes | yes  |
| 20 mm                                   | Original mounting socket (plastic)   | yes         | yes | yes | yes | yes | yes | yes | yes  |
|                                         | Mounting socket BES Q40-HW-2 (metal) | yes         | yes | yes | yes | yes | yes | yes | yes  |
| 25 mm                                   | Original mounting socket (plastic)   | no          | no  | yes | yes | yes | yes | yes | yes  |
|                                         | Mounting socket BES Q40-HW-2 (metal) | no          | no  | yes | yes | yes | yes | yes | yes* |
| 35 mm at BES...35E...                   | Original mounting socket (plastic)   | no          | no  | no  | yes | no  | yes | yes | yes  |
|                                         | Mounting socket BES Q40-HW-2 (metal) | no          | no  | no  | yes | yes | yes | no  | no   |
| 35 mm at BES...35Z...011                | Original mounting socket (plastic)   | no          | no  | yes | yes | no  | yes | yes | yes  |
|                                         | Mounting socket BES Q40-HW-2 (metal) | no          | no  | no  | yes | no  | yes | no  | yes* |
| 40 mm                                   | Original mounting socket (plastic)   | no          | no  | no  | yes | no  | yes | no  | yes  |
|                                         | Mounting socket BES Q40-HW-2 (metal) | no          | no  | no  | yes | yes | yes | no  | no   |

\*s<sub>n</sub> may be reduced by up to 15 %.  
For BES...25Z/35Z...011 see additional mounting options at [www.balluff.com](http://www.balluff.com)


**Row mounting**  
flush 80 mm  
non-flush 120 mm



**5**  
Connectors,  
Holders ...  
Page 5.2 ...

## Inductive Sensors

DC 3-wire  
M8  
 $s_n$  1.5 mm

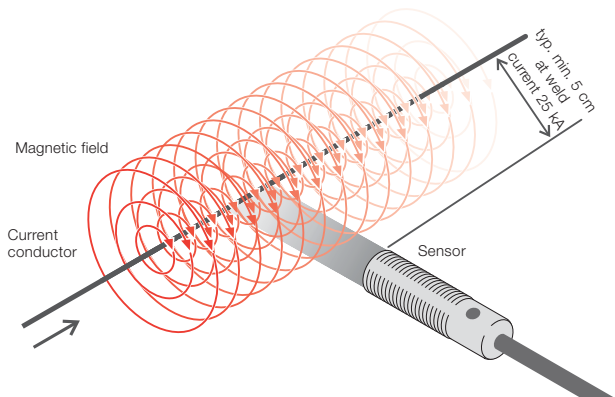

### Weld immune Factor 1 Sensors

... the all-rounder for harsh industrial applications.

### Magnetic field immune

Insensitive to magnetic fields which can be created with electrical currents of up to 25 kA (at a distance from energetic conductors of approx. 5 cm).

### Weld splatter resistant

Resistant to metal splatter and combustion remains caused by welding.


### Factor 1

Identical switching distance for steel, stainless, aluminum or brass.

### Note about part number

BES ...-W Teflon-coated active surface and housing to protect against weld splatter.


|                                         |               |
|-----------------------------------------|---------------|
| Housing size                            | <b>M8x1</b>   |
| Mounting (see notes starting p. 1.0.11) | flush         |
| Rated operating distance $s_n$          | <b>1.5 mm</b> |
| Assured operating distance $s_a$        | 0...1.2 mm    |

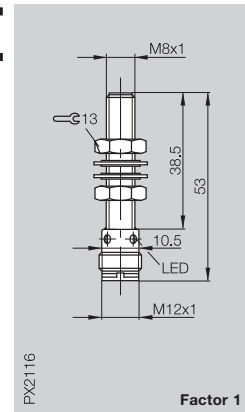

| PNP                                | NO | ① | BES M08EG1-PSC15A-S04G-W        |
|------------------------------------|----|---|---------------------------------|
| Supply voltage $U_B$               |    |   | 10...30 V DC                    |
| Voltage drop $U_d$ at $I_e$        |    |   | ≤ 2.5 V                         |
| Rated insulation voltage $U_i$     |    |   | 250 V AC                        |
| Rated operational current $I_e$    |    |   | 150 mA                          |
| No-load supply current $I_0$ max.  |    |   | ≤ 15 mA                         |
| Polarity reversal protected        |    |   | yes                             |
| Short circuit protected            |    |   | yes                             |
| Repeat accuracy R                  |    |   | ≤ 5 %                           |
| Ambient temperature range $T_a$    |    |   | -25...+70 °C                    |
| Switching frequency f              |    |   | 2000 Hz                         |
| Utilization category               |    |   | DC 13                           |
| Function indicator                 |    |   | yes                             |
| Degree of protection per IEC 60529 |    |   | IP 67                           |
| Insulation class                   |    |   | □                               |
| Housing material                   |    |   | Stainless steel,<br>PTFE coated |
| Material of sensing face           |    |   | PBT and PTFE                    |
| Connection                         |    |   | Connector                       |
| Approval                           |    |   |                                 |
| Recommended connector              |    |   | BKS- _ 19/BKS- _ 20             |

① Wiring diagrams see page 1.0.6  
Switching distance ■■ see page 1.0.10


On request:  
For applications in direct weld area we recommend the connectors with irradiated cable as an accessory.

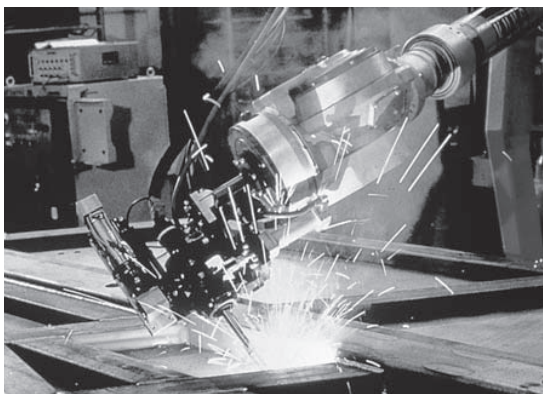

magnetic field **immune**  
+ weld splatter **resistant**  
= weld **immune**

+ **Factor 1**

| M8x1<br>flush<br>1.5 mm<br>0...1.2 mm | M12x1<br>flush<br>3 mm<br>0...2.4 mm | M12x1<br>flush<br>3 mm<br>0...2.4 mm | M12x1<br>non-flush<br>8 mm<br>0...6.5 mm | M12x1<br>non-flush<br>8 mm<br>0...6.5 mm |
|---------------------------------------|--------------------------------------|--------------------------------------|------------------------------------------|------------------------------------------|
|---------------------------------------|--------------------------------------|--------------------------------------|------------------------------------------|------------------------------------------|

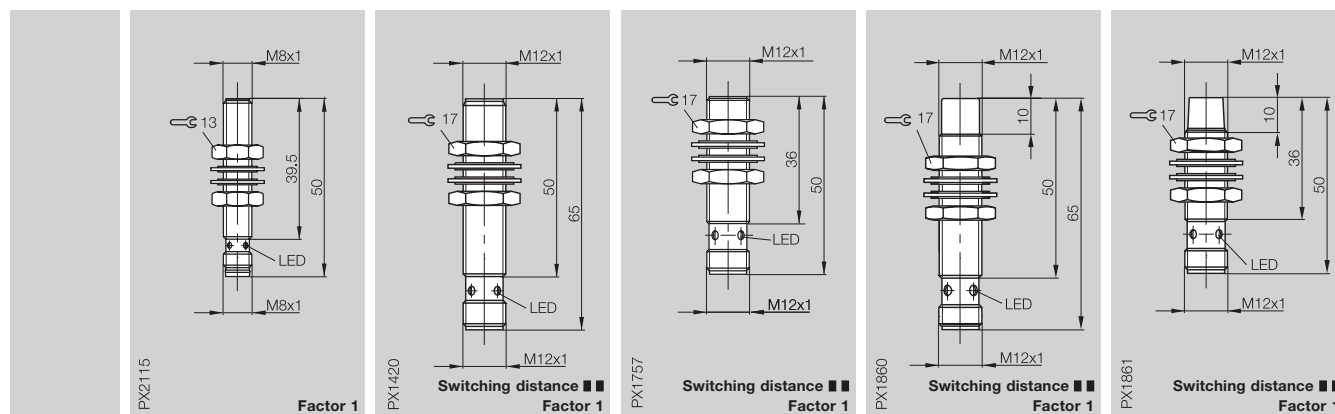

| BES M08EG-PSC15A-S49G-W         | BES M12ML-PSC30A-S04G-W   | BES M12MF1-PSC30A-S04G-W  | BES M12ML-PSC80E-S04G-W   | BES M12MD1-PSC80E-S04G-W  |
|---------------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| 10...30 V DC                    | 10...30 V DC              | 10...30 V DC              | 10...30 V DC              | 10...30 V DC              |
| ≤ 2.5 V                         | ≤ 2.5 V                   | ≤ 2.5 V                   | ≤ 2.5 V                   | ≤ 2.5 V                   |
| 250 V AC                        | 250 V AC                  | 250 V AC                  | 250 V AC                  | 250 V AC                  |
| 150 mA                          | 200 mA                    | 200 mA                    | 200 mA                    | 200 mA                    |
| ≤ 15 mA                         | ≤ 15 mA                   | ≤ 15 mA                   | ≤ 15 mA                   | ≤ 15 mA                   |
| yes                             | yes                       | yes                       | yes                       | yes                       |
| yes                             | yes                       | yes                       | yes                       | yes                       |
| ≤ 5 %                           | ≤ 5 %                     | ≤ 5 %                     | ≤ 5 %                     | ≤ 5 %                     |
| -25...+70 °C                    | -25...+70 °C              | -25...+70 °C              | -25...+70 °C              | -25...+70 °C              |
| 2000 Hz                         | 2000 Hz                   | 2000 Hz                   | 2000 Hz                   | 2000 Hz                   |
| DC 13                           | DC 13                     | DC 13                     | DC 13                     | DC 13                     |
| yes                             | yes                       | yes                       | yes                       | yes                       |
| IP 67                           | IP 67                     | IP 67                     | IP 67                     | IP 67                     |
| □                               | □                         | □                         | □                         | □                         |
| Stainless steel,<br>PTFE coated | Brass,<br>PTFE coated     | Brass,<br>PTFE coated     | Brass,<br>PTFE coated     | Brass,<br>PTFE coated     |
| LCP and PTFE<br>Connector       | LCP and PTFE<br>Connector | LCP and PTFE<br>Connector | LCP and PTFE<br>Connector | LCP and PTFE<br>Connector |
|                                 | cULus                     | cULus                     | cULus                     | cULus                     |
| BKS- _ 48/BKS- _ 49             | BKS- _ 19/BKS- _ 20       | BKS- _ 19/BKS- _ 20       | BKS- _ 19/BKS- _ 20       | BKS- _ 19/BKS- _ 20       |


**1.5**

**Factor 1**  
**Weld**  
**immune**  
**Magnetic**  
**field immune**  
Diagnostic  
Steelface  
Pressure  
rated  
Pressure  
rated Ex  
Namur Ex  
Temperature  
rated  
PROXINOX®  
Ring  
Sensors  
Extended  
switching  
distance

**5**

Connectors,  
Holders ...  
Page 5.2 ...



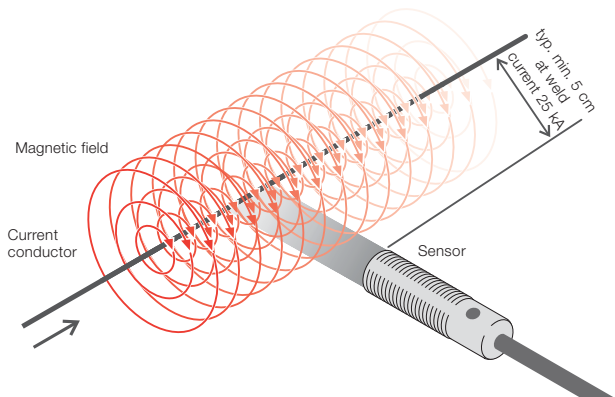

**Weld immune  
Factor 1 Sensors**

... the all-rounder for harsh industrial applications.

**Magnetic field immune**


Insensitive to magnetic fields which can be created with electrical currents of up to 25 kA (at a distance from energetic conductors of approx. 5 cm).

**Weld splatter resistant**


Resistant to metal splatter and combustion remains caused by welding.

**Factor 1**

Identical switching distance for steel, stainless, aluminum or brass.

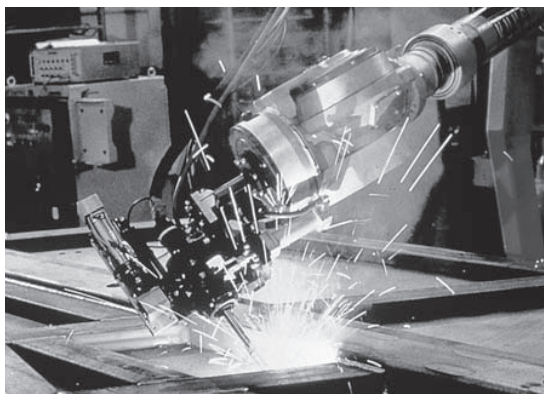

|                                           |              |
|-------------------------------------------|--------------|
| Housing size                              | <b>M18x1</b> |
| Mounting (see notes starting p. 1.0.11)   | flush        |
| Rated operating distance s <sub>n</sub>   | <b>5 mm</b>  |
| Assured operating distance s <sub>a</sub> | 0...4.1 mm   |

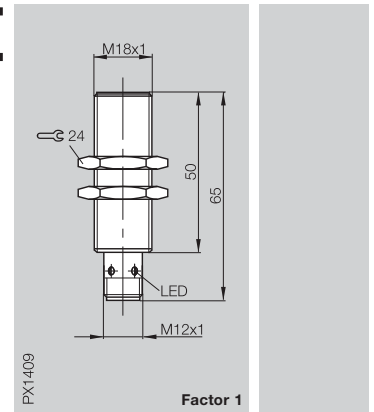

**Note about part number**

BES ...-W Teflon coated active surface and housing to protect against weld splatter.

|                                               |                       |   |                                |
|-----------------------------------------------|-----------------------|---|--------------------------------|
| PNP                                           | NO                    | ① | <b>BES M18ML-PSC50A-S04G-W</b> |
| Supply voltage U <sub>B</sub>                 | 10...30 V DC          |   |                                |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 2.5 V               |   |                                |
| Rated insulation voltage U <sub>i</sub>       | 250 V AC              |   |                                |
| Rated operational current I <sub>e</sub>      | 200 mA                |   |                                |
| No-load supply current I <sub>0</sub> max.    | ≤ 15 mA               |   |                                |
| Polarity reversal protected                   | yes                   |   |                                |
| Short circuit protected                       | yes                   |   |                                |
| Repeat accuracy R                             | ≤ 5 %                 |   |                                |
| Ambient temperature range T <sub>a</sub>      | -25...+70 °C          |   |                                |
| Switching frequency f                         | 2500 Hz               |   |                                |
| Utilization category                          | DC 13                 |   |                                |
| Function indicator                            | yes                   |   |                                |
| Degree of protection per IEC 60529            | IP 67                 |   |                                |
| Insulation class                              | □                     |   |                                |
| Housing material                              | Brass,<br>PTFE coated |   |                                |
| Material of sensing face                      | LCP and PTFE          |   |                                |
| Connection                                    | Connector             |   |                                |
| Approval                                      |                       |   |                                |
| Recommended connector                         | BKS- _ 19/BKS- _ 20   |   |                                |

① Wiring diagrams see page 1.0.6  
Switching distance ■■ see page 1.0.10

On request:  
For applications in direct weld area we recommend the connectors with irradiated cable as an accessory.

magnetic field **immune**  
+ weld splatter **resistant**  
= weld **immune**

+ **Factor 1**

|  | <b>M18x1</b><br>flush<br><b>5 mm</b><br>0...4.1 mm | <b>M18x1</b><br>non-flush<br><b>12 mm</b><br>0...9.7 mm | <b>M18x1</b><br>non-flush<br><b>12 mm</b><br>0...9.7 mm | <b>M30x1.5</b><br>flush<br><b>10 mm</b><br>0...8.1 mm | <b>M30x1.5</b><br>non-flush<br><b>20 mm</b><br>0...16.2 mm |
|--|----------------------------------------------------|---------------------------------------------------------|---------------------------------------------------------|-------------------------------------------------------|------------------------------------------------------------|
|  |                                                    |                                                         |                                                         |                                                       |                                                            |
|  | <b>Factor 1</b>                                    | <b>Switching distance ■ ■<br/>Factor 1</b>              | <b>Switching distance ■ ■<br/>Factor 1</b>              | <b>Factor 1</b>                                       | <b>Switching distance ■ ■<br/>Factor 1</b>                 |

| BES M18MF1-PSC50A-S04G-W                           | BES M18ML-PSC12E-S04G-W                            | BES M18MD-PSC12E-S04G-W                            | BES M30ML-PSC10A-S04G-W                            | BES M30ML-PSC20E-S04G-W                            |
|----------------------------------------------------|----------------------------------------------------|----------------------------------------------------|----------------------------------------------------|----------------------------------------------------|
| 10...30 V DC                                       | 10...30 V DC                                       | 10...30 V DC                                       | 10...30 V DC                                       | 10...30 V DC                                       |
| ≤ 2.5 V                                            | ≤ 2.5 V                                            | ≤ 2.5 V                                            | ≤ 2.5 V                                            | ≤ 2.5 V                                            |
| 250 V AC                                           | 250 V AC                                           | 250 V AC                                           | 250 V AC                                           | 250 V AC                                           |
| 200 mA                                             | 200 mA                                             | 200 mA                                             | 200 mA                                             | 200 mA                                             |
| ≤ 15 mA                                            | ≤ 15 mA                                            | ≤ 15 mA                                            | ≤ 17 mA                                            | ≤ 17 mA                                            |
| yes                                                | yes                                                | yes                                                | yes                                                | yes                                                |
| yes                                                | yes                                                | yes                                                | yes                                                | yes                                                |
| ≤ 5 %                                              | ≤ 5 %                                              | ≤ 5 %                                              | ≤ 5 %                                              | ≤ 5 %                                              |
| -25...+70 °C                                       | -25...+70 °C                                       | -25...+70 °C                                       | -25...+70 °C                                       | -25...+70 °C                                       |
| 2500 Hz                                            | 2500 Hz                                            | 2500 Hz                                            | 600 Hz                                             | 1000 Hz                                            |
| DC 13                                              | DC 13                                              | DC 13                                              | DC 13                                              | DC 13                                              |
| yes                                                | yes                                                | yes                                                | yes                                                | yes                                                |
| IP 67                                              | IP 67                                              | IP 67                                              | IP 67                                              | IP 67                                              |
| Brass,<br>PTFE coated<br>LCP and PTFE<br>Connector | Brass,<br>PTFE coated<br>LCP and PTFE<br>Connector | Brass,<br>PTFE coated<br>LCP and PTFE<br>Connector | Brass,<br>PTFE coated<br>LCP and PTFE<br>Connector | Brass,<br>PTFE coated<br>LCP and PTFE<br>Connector |
| cULus                                              | cULus                                              | cULus                                              | cULus                                              | cULus                                              |
| BKS- 19/BKS- 20                                    | BKS- 19/BKS- 20                                    | BKS- 19/BKS- 20                                    | BKS- 19/BKS- 20                                    | BKS- 19/BKS- 20                                    |

**Factor 1**  
**Weld  
immune**  
**Magnetic  
field immune**  
Diagnostic  
Steelface  
Pressure  
rated  
Pressure  
rated Ex  
Namur Ex  
Temperature  
rated  
PROXINOX®  
Ring  
Sensors  
Extended  
switching  
distance

**5**

Connectors,  
Holders ...  
Page 5.2 ...



## Inductive Sensors





DC 3-wire  
M12, M18  
 $s_n$  3 mm, 5 mm, 8 mm

|                                         |  |
|-----------------------------------------|--|
| Housing size                            |  |
| Mounting (see notes starting p. 1.0.11) |  |
| Rated operating distance $s_n$          |  |
| Assured operating distance $s_a$        |  |

|              |
|--------------|
| <b>M12x1</b> |
| flush        |
| <b>3 mm</b>  |
| 0...2.2 mm   |

|              |
|--------------|
| <b>M12x1</b> |
| non-flush    |
| <b>8 mm</b>  |
| 0...6.3 mm   |

|              |
|--------------|
| <b>M18x1</b> |
| flush        |
| <b>5 mm</b>  |
| 0...3.9 mm   |

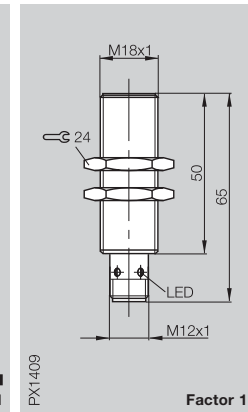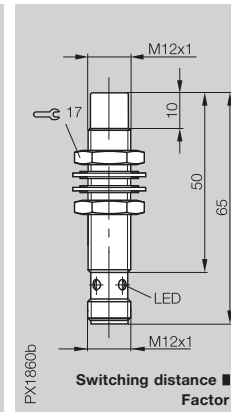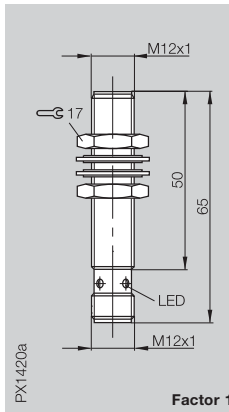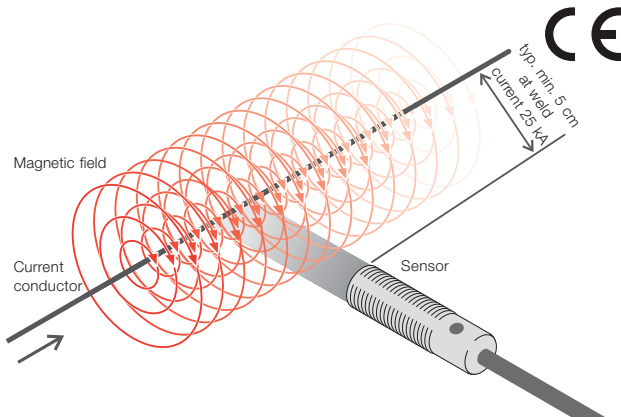

### Weld immune Factor 1 Sensors

... the all-rounder for harsh industrial applications.

### Magnetic field immune

Insensitive to magnetic fields which can be created with electrical currents of up to 25 kA (at a distance from energetic conductors of approx. 5 cm).

### Weld splatter resistant

Resistant to metal splatter and combustion remains caused by welding.

### Factor 1

Identical switching distance for steel, stainless, aluminum or brass.

### Note about part number

BES ...-W01  
Ceramic coating.  
Rugged ceramic coating, thick for the most extreme welding environments.

|     |                 |
|-----|-----------------|
| PNP | NO ①            |
|     | complementary ③ |

|                                   |              |
|-----------------------------------|--------------|
| Supply voltage $U_B$              | 10...30 V DC |
| Voltage drop $U_a$ at $I_a$       | $\leq 2.5$ V |
| Rated insulation voltage $U_i$    | 250 V AC     |
| Rated operational current $I_a$   | 200 mA       |
| No-load supply current $I_0$ max. | $\leq 15$ mA |
| Polarity reversal protected       | yes          |
| Short circuit protected           | yes          |
| Repeat accuracy R                 | $\leq 5$ %   |
| Ambient temperature range $T_a$   | -25...+70 °C |
| Switching frequency f             | 2000 Hz      |
| Utilization category              | DC 13        |
| Function/Supply voltage indicator | yes/no       |

|                                    |                       |
|------------------------------------|-----------------------|
| Degree of protection per IEC 60529 | IP 67                 |
| Insulation class                   | □                     |
| Housing material                   | Brass,<br>PTFE coated |
| Material of sensing face           | Ceramic coating       |
| Connection                         | Connector             |

|                       |                   |
|-----------------------|-------------------|
| Approval              | cULus             |
| Recommended connector | BKS-_ 19/BKS-_ 20 |

|                           |
|---------------------------|
| BES M12ML-PSC30A-S04G-W01 |
|---------------------------|

|                                   |              |
|-----------------------------------|--------------|
| Supply voltage $U_B$              | 10...30 V DC |
| Voltage drop $U_a$ at $I_a$       | $\leq 2.5$ V |
| Rated insulation voltage $U_i$    | 250 V AC     |
| Rated operational current $I_a$   | 200 mA       |
| No-load supply current $I_0$ max. | $\leq 15$ mA |
| Polarity reversal protected       | yes          |
| Short circuit protected           | yes          |
| Repeat accuracy R                 | $\leq 5$ %   |
| Ambient temperature range $T_a$   | -25...+70 °C |
| Switching frequency f             | 2000 Hz      |
| Utilization category              | DC 13        |
| Function/Supply voltage indicator | yes/no       |

|                                    |                       |
|------------------------------------|-----------------------|
| Degree of protection per IEC 60529 | IP 67                 |
| Insulation class                   | □                     |
| Housing material                   | Brass,<br>PTFE coated |
| Material of sensing face           | Ceramic coating       |
| Connection                         | Connector             |

|                       |                   |
|-----------------------|-------------------|
| Approval              | cULus             |
| Recommended connector | BKS-_ 19/BKS-_ 20 |

|                           |
|---------------------------|
| BES M12ML-PSC80E-S04G-W01 |
|---------------------------|

|                                   |              |
|-----------------------------------|--------------|
| Supply voltage $U_B$              | 10...30 V DC |
| Voltage drop $U_a$ at $I_a$       | $\leq 2.5$ V |
| Rated insulation voltage $U_i$    | 250 V AC     |
| Rated operational current $I_a$   | 200 mA       |
| No-load supply current $I_0$ max. | $\leq 15$ mA |
| Polarity reversal protected       | yes          |
| Short circuit protected           | yes          |
| Repeat accuracy R                 | $\leq 5$ %   |
| Ambient temperature range $T_a$   | -25...+70 °C |
| Switching frequency f             | 2000 Hz      |
| Utilization category              | DC 13        |
| Function/Supply voltage indicator | yes/no       |

|                                    |                       |
|------------------------------------|-----------------------|
| Degree of protection per IEC 60529 | IP 67                 |
| Insulation class                   | □                     |
| Housing material                   | Brass,<br>PTFE coated |
| Material of sensing face           | Ceramic coating       |
| Connection                         | Connector             |

|                       |                   |
|-----------------------|-------------------|
| Approval              | cULus             |
| Recommended connector | BKS-_ 19/BKS-_ 20 |

|                           |
|---------------------------|
| BES M18ML-PSC50A-S04G-W01 |
|---------------------------|

|                                   |              |
|-----------------------------------|--------------|
| Supply voltage $U_B$              | 10...30 V DC |
| Voltage drop $U_a$ at $I_a$       | $\leq 2.5$ V |
| Rated insulation voltage $U_i$    | 250 V AC     |
| Rated operational current $I_a$   | 200 mA       |
| No-load supply current $I_0$ max. | $\leq 15$ mA |
| Polarity reversal protected       | yes          |
| Short circuit protected           | yes          |
| Repeat accuracy R                 | $\leq 5$ %   |
| Ambient temperature range $T_a$   | -25...+70 °C |
| Switching frequency f             | 2500 Hz      |
| Utilization category              | DC 13        |
| Function/Supply voltage indicator | yes/no       |

|                                    |                       |
|------------------------------------|-----------------------|
| Degree of protection per IEC 60529 | IP 67                 |
| Insulation class                   | □                     |
| Housing material                   | Brass,<br>PTFE coated |
| Material of sensing face           | Ceramic coating       |
| Connection                         | Connector             |

|                       |                   |
|-----------------------|-------------------|
| Approval              | cULus             |
| Recommended connector | BKS-_ 19/BKS-_ 20 |

① Wiring diagrams see page 1.0.6  
Switching distance ■■ see page 1.0.10

On request:  
For applications in direct weld area we recommend the connectors with irradiated cable as an accessory.






magnetic field **immune**  
+ weld splatter **resistant**  
= weld **immune**

+ **Factor 1**  
+ ceramic **coated**



|              |                              |                              |
|--------------|------------------------------|------------------------------|
| <b>M18x1</b> | <b>40x40x62 mm</b> Unicomact | <b>40x40x62 mm</b> Unicomact |
| non-flush    | flush                        | non-flush                    |
| <b>12 mm</b> | <b>15 mm</b>                 | <b>35 mm</b>                 |
| 0...9.5 mm   | 0...11.9 mm                  | 0...28.1 mm                  |

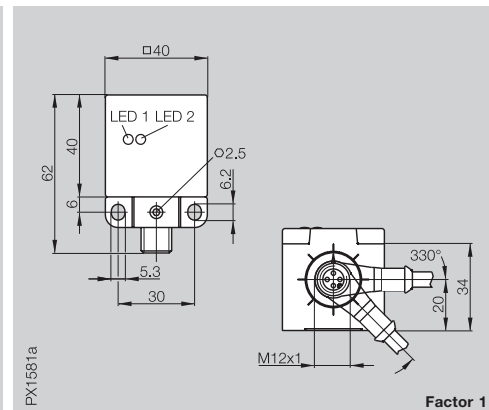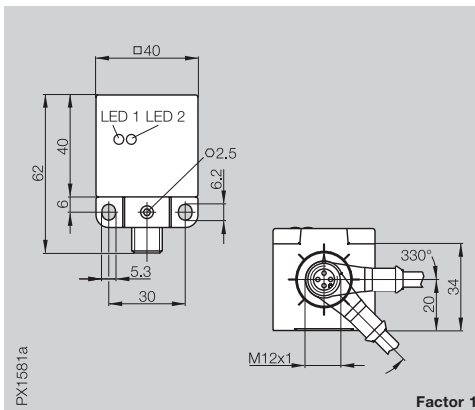
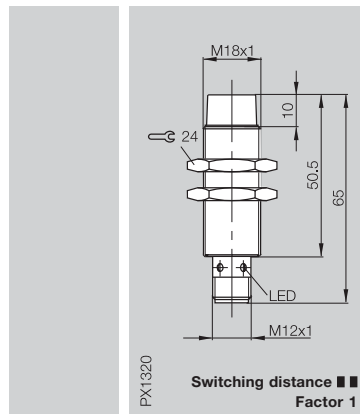


|                           |                                                          |                                                          |
|---------------------------|----------------------------------------------------------|----------------------------------------------------------|
| BES M18ML-PSC12E-S04G-W01 | BES Q40KFU-PSC15A-S04G-W01<br>BES Q40KFU-PAC15A-S04G-W01 | BES Q40KFU-PSC35E-S04G-W01<br>BES Q40KFU-PAC35E-S04G-W01 |
| 10...30 V DC              | 10...30 V DC                                             | 10...30 V DC                                             |
| ≤ 2.5 V                   | ≤ 2.5 V                                                  | ≤ 2.5 V                                                  |
| 250 V AC                  | 250 V AC                                                 | 250 V AC                                                 |
| 200 mA                    | 200 mA                                                   | 200 mA                                                   |
| ≤ 15 mA                   | ≤ 20 mA                                                  | ≤ 20 mA                                                  |
| yes                       | yes                                                      | yes                                                      |
| yes                       | yes                                                      | yes                                                      |
| ≤ 5 %                     | ≤ 5 %                                                    | ≤ 5 %                                                    |
| -25...+70 °C              | -25...+70 °C                                             | -10...+70 °C                                             |
| 2500 Hz                   | 400 Hz                                                   | 250 Hz                                                   |
| DC 13                     | DC 13                                                    | DC 13                                                    |
| yes/no                    | yes/yes                                                  | yes/yes                                                  |
| IP 67                     | IP 67                                                    | IP 67                                                    |
| Brass,<br>PTFE coated     | PBT (part coated)                                        | PBT (part coated)                                        |
| Ceramic coating           | Ceramic coating                                          | Ceramic coating                                          |
| Connector                 | Connector                                                | Connector                                                |
| cULus                     | cULus                                                    | cULus                                                    |
| BKS_ 19/BKS_ 20           | BKS_ 19/BKS_ 20                                          | BKS_ 19/BKS_ 20                                          |

**Permissible mounting options  
Unicomact**

| Rated operating distance s <sub>n</sub> | Attached using                       | permissible |     |     |     |     |     |     |     |     |
|-----------------------------------------|--------------------------------------|-------------|-----|-----|-----|-----|-----|-----|-----|-----|
| 15 mm                                   | Original mounting socket (plastic)   | yes         | yes | yes | yes | yes | yes | yes | yes | yes |
|                                         | Mounting socket BES Q40-HW-2 (metal) | yes         | yes | yes | yes | yes | yes | yes | yes | yes |
| 35 mm                                   | Original mounting socket (plastic)   | no          | no  | no  | yes | no  | yes | yes | yes | yes |
|                                         | Mounting socket BES Q40-HW-2 (metal) | no          | no  | no  | yes | no  | yes | no  | no  | no  |

**Row mounting**  
flush 80 mm  
non-flush 120 mm

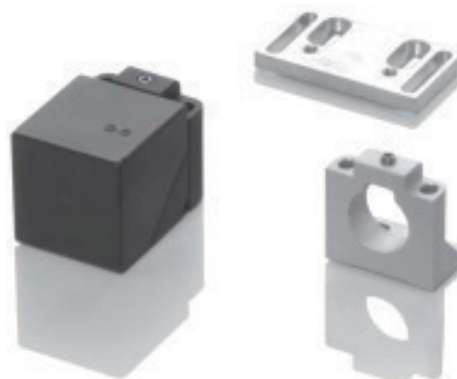

**Mounting bracket BES Q40-HW-1**  
Material: Metal


**Mounting socket BES Q40-HW-2**  
Material: Metal.  
Can be used in place of original mounting socket.  
Please note mounting options!

Please order accessories separately!

## Inductive Sensors

DC 3-wire  
M12, M18  
s<sub>n</sub> 2 mm, 4 mm, 5 mm, 8 mm

|                                           |              |              |              |              |
|-------------------------------------------|--------------|--------------|--------------|--------------|
| Housing size                              | <b>M12x1</b> | <b>M12x1</b> | <b>M18x1</b> | <b>M18x1</b> |
| Mounting (see notes starting p. 1.0.11)   | flush        | non-flush    | flush        | non-flush    |
| Rated operating distance s <sub>n</sub>   | <b>2 mm</b>  | <b>4 mm</b>  | <b>5 mm</b>  | <b>8 mm</b>  |
| Assured operating distance s <sub>a</sub> | 0...1.6 mm   | 0...3.2 mm   | 0...4.1 mm   | 0...6.5 mm   |

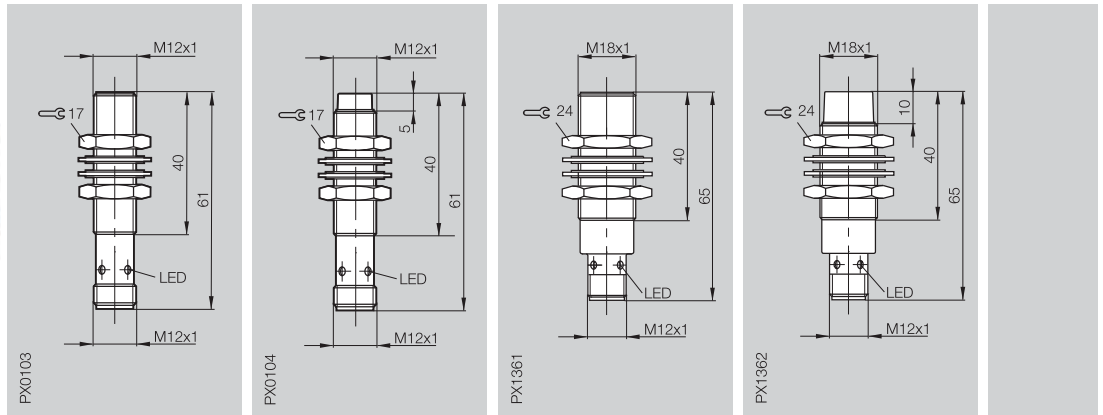

| PNP                                           | NO | ① | BES 516-325-S4-W      | BES 516-356-S4-W      | BES 516-326-S4-W      | BES 516-360-S4-W      |
|-----------------------------------------------|----|---|-----------------------|-----------------------|-----------------------|-----------------------|
| Supply voltage U <sub>B</sub>                 |    |   | 10...30 V DC          | 10...30 V DC          | 10...30 V DC          | 10...30 V DC          |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> |    |   | ≤ 2.5 V               | ≤ 2.5 V               | ≤ 1.5 V               | ≤ 2.5 V               |
| Rated insulation voltage U <sub>i</sub>       |    |   | 250 V AC              | 250 V AC              | 250 V AC              | 75 V DC               |
| Rated operational current I <sub>e</sub>      |    |   | 200 mA                | 200 mA                | 200 mA                | 200 mA                |
| No-load supply current I <sub>0</sub> max.    |    |   | ≤ 20 mA               | ≤ 20 mA               | ≤ 10 mA               | ≤ 20 mA               |
| Polarity reversal protected                   |    |   | yes                   | yes                   | yes                   | yes                   |
| Short circuit protected                       |    |   | yes                   | yes                   | yes                   | yes                   |
| Repeat accuracy R                             |    |   | ≤ 5 %                 | ≤ 5 %                 | ≤ 5 %                 | ≤ 5 %                 |
| Ambient temperature range T <sub>a</sub>      |    |   | -25...+70 °C          | -25...+70 °C          | -25...+70 °C          | -25...+70 °C          |
| Switching frequency f                         |    |   | 1000 Hz               | 1000 Hz               | 500 Hz                | 200 Hz                |
| Utilization category                          |    |   | DC 13                 | DC 13                 | DC 13                 | DC 13                 |
| Function/Supply voltage indicator             |    |   | yes/no                | yes/no                | yes/no                | yes/no                |
| Degree of protection per IEC 60529            |    |   | IP 67                 | IP 67                 | IP 67                 | IP 67                 |
| Insulation class                              |    |   | □                     | □                     | □                     | □                     |
| Housing material                              |    |   | Brass,<br>PTFE coated | Brass,<br>PTFE coated | Brass,<br>PTFE coated | Brass,<br>PTFE coated |
| Material of sensing face                      |    |   | LCP                   | PTFE                  | PTFE                  | PTFE                  |
| Connection                                    |    |   | Connector             | Connector             | Connector             | Connector             |
| No. of wires × cross-section                  |    |   |                       |                       |                       |                       |
| Approval                                      |    |   | cULus                 | cULus                 | cULus                 | cULus                 |
| Recommended connector                         |    |   | BKS- 19/BKS- 20       | BKS- 19/BKS- 20       | BKS- 19/BKS- 20       | BKS- 19/BKS- 20       |

① Wiring diagrams see page 1.0.6

On request:  
For applications directly in the welding area  
we recommend the connectors with  
irradiated cable as an accessory.


### Magnetic field immune

Insensitive to magnetic fields  
which can be created with  
electrical currents of up  
to 25 kA (at a distance from  
energetic conductors of  
approx. 5 cm).

### Weld splatter resistant


Resistant to metal splatter  
and combustion remains  
caused by welding.

magnetic field **immune**  
+ weld splatter **resistant**  
= weld **immune**

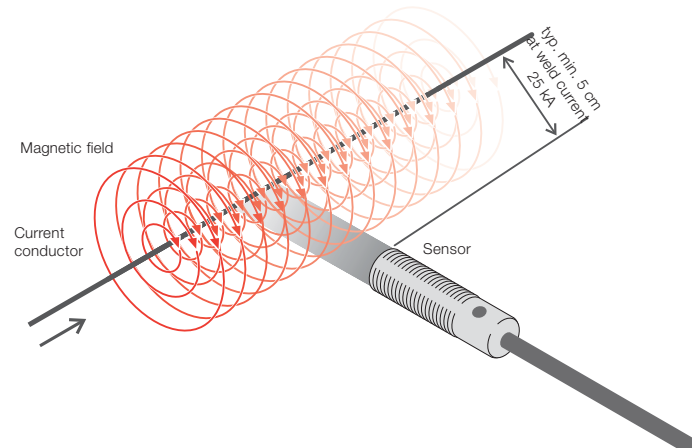



| M30×1.5<br>flush<br>10 mm<br>0...8.1 mm | M30×1.5<br>non-flush<br>15 mm<br>0...12.2 mm | 20×32×8 mm R01<br>flush<br>5 mm<br>0...4.1 mm | 20×32×8 mm R01<br>flush<br>5 mm<br>0...4.1 mm |
|-----------------------------------------|----------------------------------------------|-----------------------------------------------|-----------------------------------------------|
|-----------------------------------------|----------------------------------------------|-----------------------------------------------|-----------------------------------------------|

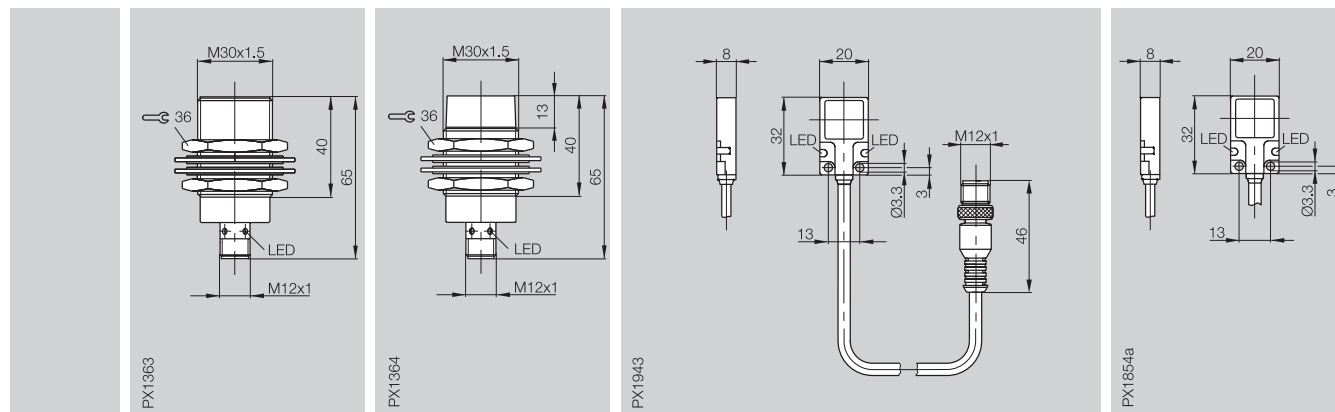

| BES 516-327-S4-W                                                      | BES 516-362-S4-W                                                     | BES R01ZC-PSC50B-BX00.2-GS04-W01                                                                           | BES R01ZC-PSC50B-BX05-W01                                                                                                       |
|-----------------------------------------------------------------------|----------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| 10...30 V DC<br>≤ 1.5 V<br>250 V AC<br>200 mA<br>≤ 8 mA<br>yes<br>yes | 10...30 V DC<br>≤ 1.5 V<br>75 V DC<br>200 mA<br>≤ 8 mA<br>yes<br>yes | 10...30 V DC<br>≤ 2.5 V<br>75 V DC<br>200 mA<br>≤ 15 mA<br>yes<br>yes                                      | 10...30 V DC<br>≤ 2.5 V<br>75 V DC<br>200 mA<br>≤ 15 mA<br>yes<br>yes                                                           |
| ≤ 5 %<br>-25...+70 °C<br>100 Hz<br>DC 13<br>yes/no                    | ≤ 5 %<br>-25...+70 °C<br>100 Hz<br>DC 13<br>yes/no                   | ≤ 5 %<br>-25...+70 °C<br>100 Hz<br>DC 13<br>yes/yes                                                        | ≤ 5 %<br>-25...+70 °C<br>100 Hz<br>DC 13<br>yes/yes                                                                             |
| IP 67<br>Brass,<br>PTFE coated<br>PTFE<br>Connector                   | IP 67<br>Brass,<br>PTFE coated<br>PTFE<br>Connector                  | IP 67<br>GD-Zn<br>Ceramic coating<br>0.2 m weld splatter resistant cable with connector,<br>PUR irradiated | IP 67<br>GD-Zn<br>Ceramic coating<br>5 m weld splatter<br>resistant cable, PUR<br>irradiated<br>3x0.25 mm <sup>2</sup><br>cULus |
| cULus<br>BKS- 19/BKS- 20                                              | cULus<br>BKS- 19/BKS- 20                                             | cULus<br>BKS- 19                                                                                           | cULus                                                                                                                           |

**1.5**

Factor 1  
**Weld  
immune**  
**Magnetic  
field immune**  
Diagnostic  
Steelface  
Pressure  
rated  
Pressure  
rated Ex  
Namur Ex  
Temperature  
rated  
PROXINOX®  
Ring  
Sensors  
Extended  
switching  
distance

### Part numbering

BES ...-W Teflon-coated active surface and housing to protect against weld splatter.

### BES ...-W01


Ceramic coating.  
Rugged ceramic coating, thick for the most extreme welding environments.

### Main applications

Position monitoring on welding equipment and robots.

### Special features of BES-R01ZC...W01


- Low profile in detection direction
- LED for function and power indication
- Cable weld splatter resistant and irradiated
- Sensing face with ceramic coating



### Mounting set BES R01-FK-1

consisting of:  
2 cheese-head screws DIN 912 M3×12  
2 spacers Ø5×Ø3.3×3.7  
1 angled screwdriver DIN 911, 2.5 mm

Please order separately!

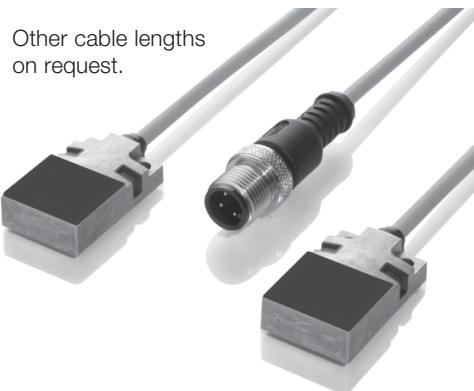


Other cable lengths on request.

**5**

Connectors,  
Holders ...  
Page 5.2 ...

## Inductive Sensors

DC 3-wire  
Block style housings  
 $s_n$  5 mm

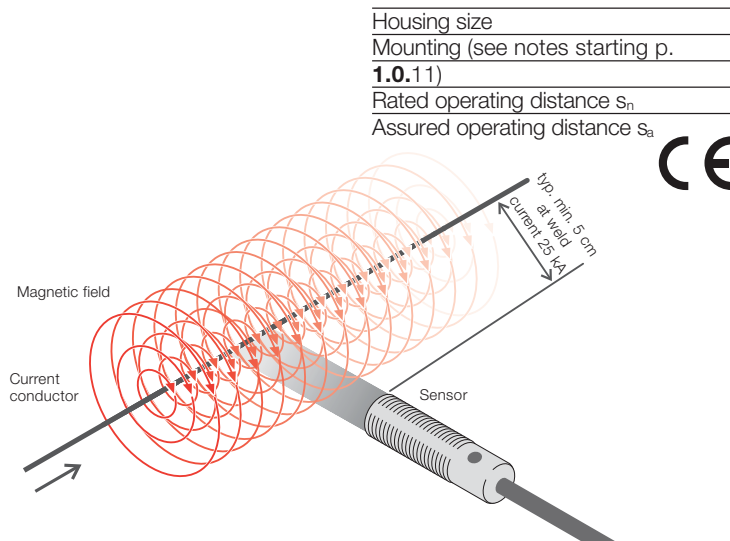

### Magnetic field immune


Insensitive to magnetic fields which can be created with electrical currents of up to 25 kA (at a distance from energetic conductors of approx. 5 cm).

### Special features of BES-R01ZC...

- Low profile in detection direction
- LED for function and power indication
- Cable weld splatter resistant and irradiated

|                                         |
|-----------------------------------------|
| Housing size                            |
| Mounting (see notes starting p. 1.0.11) |
| Rated operating distance $s_n$          |
| Assured operating distance $s_a$        |

|                       |
|-----------------------|
| <b>20×32×8 mm R01</b> |
| flush                 |
| <b>5 mm</b>           |
| 0...4.1 mm            |

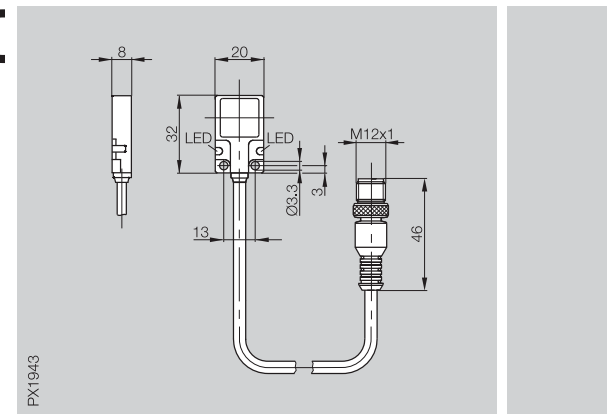


|                                    |    |   |
|------------------------------------|----|---|
| PNP                                | NO | ① |
| Supply voltage $U_B$               |    |   |
| Voltage drop $U_d$ at $I_o$        |    |   |
| Rated insulation voltage $U_i$     |    |   |
| Rated operational current $I_o$    |    |   |
| No-load supply current $I_o$ max.  |    |   |
| Polarity reversal protected        |    |   |
| Short circuit protected            |    |   |
| Repeat accuracy R                  |    |   |
| Ambient temperature range $T_a$    |    |   |
| Switching frequency f              |    |   |
| Utilization category               |    |   |
| Function/Supply voltage indicator  |    |   |
| Degree of protection per IEC 60529 |    |   |
| Housing material                   |    |   |
| Material of sensing face           |    |   |
| Connection                         |    |   |
| max. conductor cross-section       |    |   |
| Approval                           |    |   |
| Recommended connector              |    |   |
| possible mounting options          |    |   |

|                                                                    |
|--------------------------------------------------------------------|
| <b>BES R01ZC-PSC50B-BX00.2-GS04-V</b>                              |
| 10...30 V DC                                                       |
| ≤ 2.5 V                                                            |
| 75 V DC                                                            |
| 200 mA                                                             |
| ≤ 15 mA                                                            |
| yes                                                                |
| yes                                                                |
| ≤ 5 %                                                              |
| –25...+70 °C                                                       |
| 100 Hz                                                             |
| DC 13                                                              |
| yes/yes                                                            |
| IP 67                                                              |
| GD-Zn                                                              |
| PA 12                                                              |
| 0.2 m weld splatter resistant cable with connector, PUR irradiated |
| cULus                                                              |
| BKS_ 19                                                            |

① Wiring diagrams see page 1.0.6

Other cable lengths on request.






**Mounting set BES R01-FK-1**  
consisting of:  
2 cheese-head screws DIN 912 M3×12  
2 spacers Ø5×Ø3.3×3.7  
1 angled screwdriver DIN 911, 2.5 mm

Please order separately!



|                       |                               |                               |
|-----------------------|-------------------------------|-------------------------------|
| <b>20×32×8 mm</b> R01 | <b>40×40×120 mm</b> Unisensor | <b>40×40×120 mm</b> Unisensor |
| flush                 | flush                         | flush                         |
| <b>5 mm</b>           | <b>15 mm</b>                  | <b>15 mm</b>                  |
| 0...4.1 mm            | 0...12.2 mm                   | 0...12.2 mm                   |

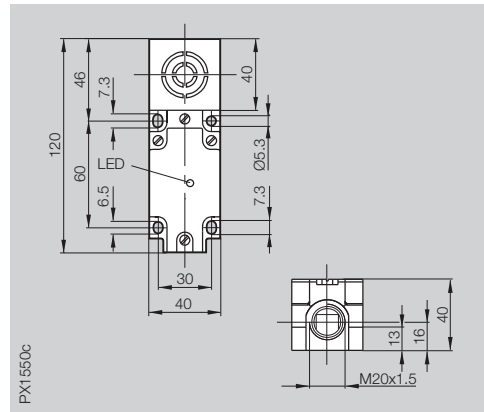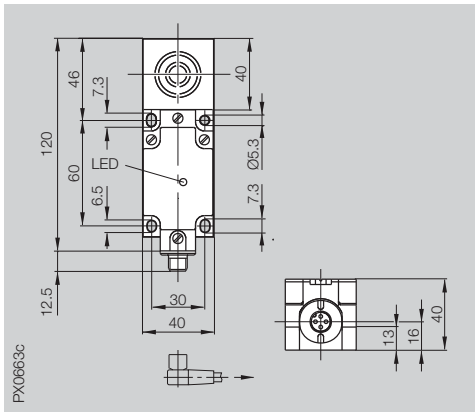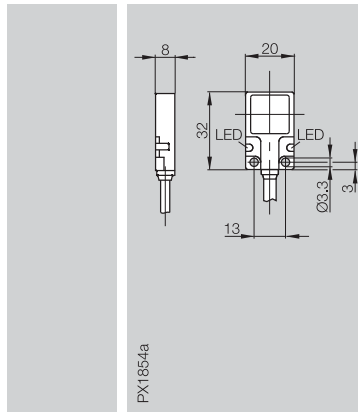

|                                                   |                        |                                           |
|---------------------------------------------------|------------------------|-------------------------------------------|
| BES R01ZC-PSC50B-BX03-V                           | BES 517-385-M3-CW-S-S4 | BES 517-385-M3-CW-S                       |
| 10...30 V DC                                      | 10...30 V DC           | 10...30 V DC                              |
| ≤ 2.5 V                                           | ≤ 2.5 V                | ≤ 2.5 V                                   |
| 75 V DC                                           | 75 V DC                | 75 V DC                                   |
| 200 mA                                            | 200 mA                 | 200 mA                                    |
| ≤ 15 mA                                           | ≤ 12 mA                | ≤ 12 mA                                   |
| yes                                               | yes                    | yes                                       |
| yes                                               | yes                    | yes                                       |
| ≤ 5 %                                             | ≤ 5 %                  | ≤ 5 %                                     |
| -25...+70 °C                                      | -25...+70 °C           | -25...+70 °C                              |
| 100 Hz                                            | 15 Hz                  | 15 Hz                                     |
| DC 13                                             | DC 13                  | DC 13                                     |
| yes/yes                                           | yes/no                 | yes/no                                    |
| IP 67                                             | IP 67                  | IP 67                                     |
| GD-Zn                                             | PBT                    | PBT                                       |
| PA 12                                             | PBT                    | PBT                                       |
| 3 m weld splatter resistant cable, PUR irradiated | Connector              | Screw terminals up to 2.5 mm <sup>2</sup> |
| 3x0.25 mm <sup>2</sup>                            |                        |                                           |
| cULus                                             | cULus                  | cULus                                     |
|                                                   | BKS_19/BKS_20          |                                           |
|                                                   | Fig. 1 to 5            | Fig. 1 to 5                               |

**1.5**

Factor 1  
Weld immune  
**Magnetic field immune**  
Diagnostic  
Steelface  
Pressure rated  
Pressure rated Ex  
Namur Ex  
Temperature rated  
PROXINOX®  
Ring Sensors  
Extended switching distance



**Mounting options**




Fig. 1




Fig. 2




Fig. 3




Fig. 4






Fig. 5

**Row mounting**

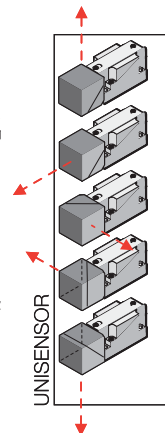

Note permissible installation variants.

**5**

Connectors, Holders ...  
Page 5.2 ...

### Desina sensors with diagnostic output

These inductive sensors have been specially designed to the Desina specification for demanding use on machine tools.

The additional diagnostic output monitors the switch and cable function. As long as the sensor is functional, a "High" signal is emitted.

Balluff sensors with Desina specification meet the requirements of ISO 23570-Part 1:  
"Industrial automation systems and integration – Distributed installation in industrial applications – Part 1: Sensors and actuators".

#### Note!

To ensure reliable function monitoring, connectors without LED must be used (see recommended connectors).

Additional features:

#### Factor 1 Sensors

detect objects such as steel, aluminum or brass at the same switching distance (no reduction factor).

This property offers advantages in applications where the material of the target object can vary.

In addition, all Factor 1 sensors are **magnetic field immune**.

Their function is not impaired by strong electromagnetic fields (such as from induction hardening or welding equipment). Factor 1 sensors remain unaffected in their switching behavior by weld currents up to 25 kA.

#### Part numbering

##### BES ...-M01

Diagnostic function monitors sensor and cable function. Emits a high signal on the monitor output as long as the sensor is functional.

##### BES ...-WM01

Diagnostic function and Teflon-coating (weld splatter resistant)

|                                         |  |
|-----------------------------------------|--|
| Housing size                            |  |
| Mounting (see notes starting p. 1.0.11) |  |
| Rated operating distance $s_n$          |  |
| Assured operating distance $s_a$        |  |




www.desina.de

| PNP                                | NO |
|------------------------------------|----|
| Supply voltage $U_B$               |    |
| Voltage drop $U_d$ at $I_e$        |    |
| Rated insulation voltage $U_i$     |    |
| Rated operational current $I_e$    |    |
| Monitor output load capacity       |    |
| No-load supply current $I_0$ max.  |    |
| Polarity reversal protected        |    |
| Short circuit protected            |    |
| Repeat accuracy R                  |    |
| Ambient temperature range $T_a$    |    |
| Switching frequency f              |    |
| Utilization category               |    |
| Function/Supply voltage indicator  |    |
| Degree of protection per IEC 60529 |    |
| Insulation class                   |    |
| Housing material                   |    |
| Material of sensing face           |    |
| Connection                         |    |
| Approval                           |    |
| Recommended connector              |    |
| possible mounting options          |    |

Switching distance ■ ■ see page 1.0.10

#### Wiring diagram



#### Mounting socket

##### BES Q40-HW-2

Material: Metal.  
Can be used in place of original mounting socket. Please note mounting options!

#### Mounting bracket

##### BES Q40-HW-1

Material: Metal for flexible installation.

#### Protective cover





##### BES Q40-SH-2

Material: PA 6 as step protection.

#### Weld protection

##### BES Q40-SH-1

Material: Metal.  
For applications directly in the weld area.  
Only for BES Q40KFU-...A-...!

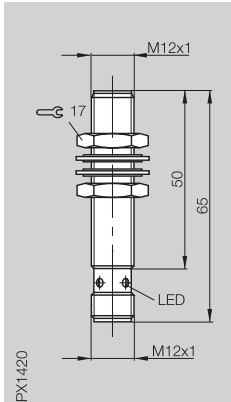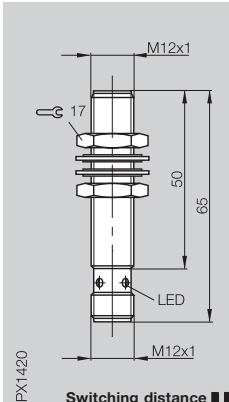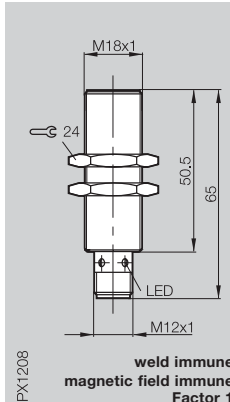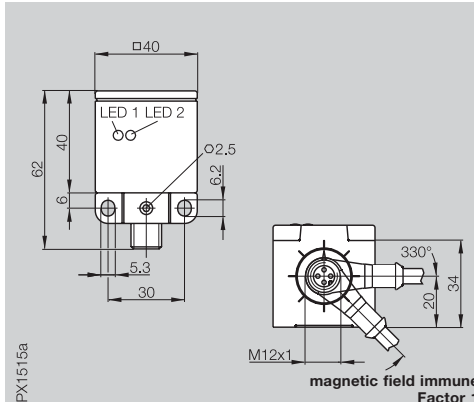
|                                                                                   | M12x1<br>flush<br>2 mm<br>0...1.6 mm                                              | M12x1<br>flush<br>4 mm<br>0...3.2 mm                                              | M18x1<br>flush<br>5 mm<br>0...4.1 mm                                               | 40x40x62 mm Unicomact<br>flush<br>15 mm<br>0...12.2 mm |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|--------------------------------------------------------|
|  |  |  |  |                                                        |
|                                                                                   | PX1420                                                                            | PX1420                                                                            | PX1208                                                                             | PX1515a                                                |
|                                                                                   |                                                                                   | Switching distance ■ ■                                                            | weld immune<br>magnetic field immune<br>Factor 1                                   | magnetic field immune<br>Factor 1                      |
| BES M12MI-PSC20B-S04G-M01                                                         | BES M12MI-PSC40B-S04G-M01                                                         | BES M18MI-PSC50A-S04G-WM01                                                        | BES Q40KFU-PSC15A-S04G-M01                                                         |                                                        |
| 10...30 V DC                                                                      | 10...30 V DC                                                                      | 10...30 V DC                                                                      | 10...30 V DC                                                                       |                                                        |
| ≤ 2.5 V                                                                           | ≤ 2.5 V                                                                           | ≤ 3.5 V                                                                           | ≤ 3.5 V                                                                            |                                                        |
| 250 V AC                                                                          | 250 V AC                                                                          | 250 V AC                                                                          | 250 V AC                                                                           |                                                        |
| 200 mA                                                                            | 200 mA                                                                            | 200 mA                                                                            | 200 mA                                                                             |                                                        |
| max. 50 mA                                                                        | max. 50 mA                                                                        | max. 50 mA                                                                        | max. 50 mA                                                                         |                                                        |
| ≤ 12 mA                                                                           | ≤ 12 mA                                                                           | ≤ 25 mA                                                                           | ≤ 28 mA                                                                            |                                                        |
| yes                                                                               | yes                                                                               | yes                                                                               | yes                                                                                |                                                        |
| yes                                                                               | yes                                                                               | yes                                                                               | yes                                                                                |                                                        |
| ≤ 5 %                                                                             | ≤ 5 %                                                                             | ≤ 5 %                                                                             | ≤ 5 %                                                                              |                                                        |
| -25...+70 °C                                                                      | -25...+70 °C                                                                      | -25...+70 °C                                                                      | -25...+70 °C                                                                       |                                                        |
| 2000 Hz                                                                           | 1000 Hz                                                                           | 15 Hz                                                                             | 13 Hz                                                                              |                                                        |
| DC 13                                                                             | DC 13                                                                             | DC 13                                                                             | DC 13                                                                              |                                                        |
| yes/no                                                                            | yes/no                                                                            | yes/no                                                                            | yes/yes                                                                            |                                                        |
| IP 68 per BWN Pr. 20                                                              | IP 68 per BWN Pr. 20                                                              | IP 67                                                                             | IP 67                                                                              |                                                        |
| □                                                                                 | □                                                                                 | □                                                                                 | □                                                                                  |                                                        |
| CuZn coated                                                                       | CuZn coated                                                                       | Brass, PTFE coated                                                                | PBT                                                                                |                                                        |
| LCP                                                                               | LCP                                                                               | LCP and PTFE                                                                      | PBT                                                                                |                                                        |
| Connector                                                                         | Connector                                                                         | Connector                                                                         | Connector                                                                          |                                                        |
| cULus                                                                             | cULus                                                                             | cULus                                                                             | cULus                                                                              |                                                        |
| BKS-S 19-3-PY/BKS-S 20-3-PY                                                       | BKS-S 19-3-PY/BKS-S 20-3-PY                                                       | BKS-S 19-3-PY/S 20-3-PY                                                           | BKS-S 19-3-PY/S 20-3-PY                                                            |                                                        |
|                                                                                   |                                                                                   |                                                                                   | Fig. 1 to 4                                                                        |                                                        |

# 1.5



**Factor 1**  
Weld immune  
Magnetic field immune  
Diagnostic  
Steelface  
Pressure rated  
Pressure rated Ex  
Namur Ex  
Temperature rated  
PROXINOX®  
Ring Sensors  
Extended switching distance



**Row mounting**  
flush 80 mm



**Mounting options**

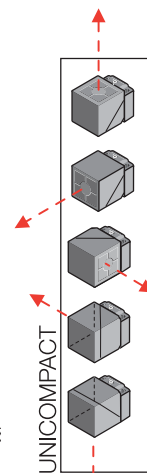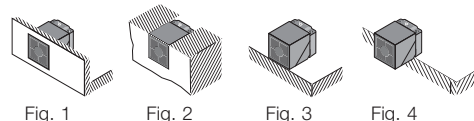

Note permissible installation variants.


# 5

Connectors,  
Holders ...  
Page 5.2 ...

## Inductive Sensors

DC 3-wire  
M12  
s<sub>n</sub> 1.5 mm

**DESINA**  
Diagnostic  
+ high pressure rated

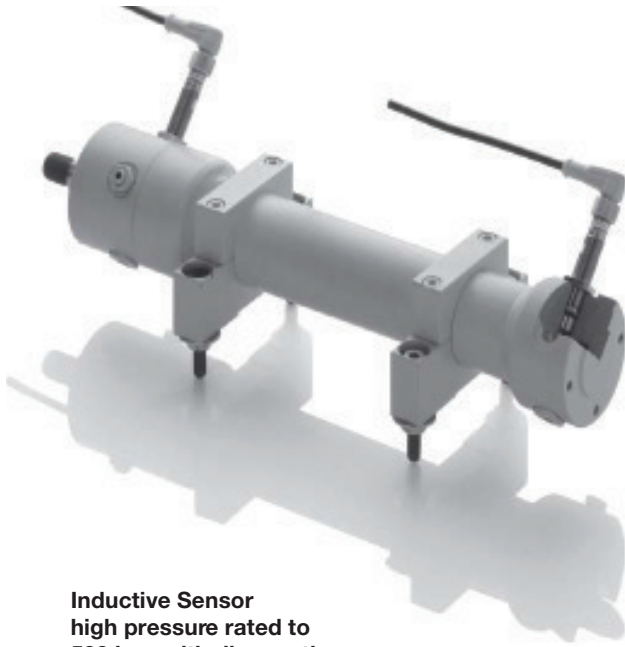

### Inductive Sensor high pressure rated to 500 bar, with diagnostics and setup aid.

This high pressure rated inductive sensor is used for position sensing of the piston position in hydraulic cylinders.

Here the active surface is subjected to high pressure inside the cylinder.

Balluff has developed a special manufacturing technique for making the active surface extremely resistant. The coils are encased in a Durometer. The additional diagnostic output monitors the sensor and cable function. As long as the sensor is functional a "High" signal is emitted.

The optical setup aid indicates when the optimum distance of the sensing face from the piston has been reached. This simplifies installation and helps to prevent damage to the sensor.

#### Note!


For reliable function monitoring, connectors without LED must be used (see recommended connectors).

#### Part numbering

**BES ...-HM01**  
Diagnostic function and high pressure rated active surface.

|                                           |
|-------------------------------------------|
| Housing size                              |
| Mounting (see notes starting p. 1.0.11)   |
| Rated operating distance s <sub>n</sub>   |
| Assured operating distance s <sub>a</sub> |

|               |
|---------------|
| <b>M12x1</b>  |
| flush         |
| <b>1.5 mm</b> |
| 0...1.2 mm    |

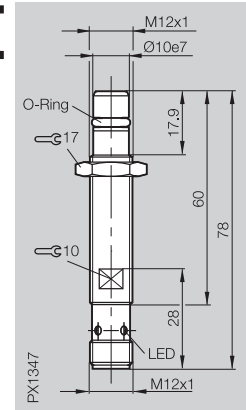

|            |           |                                   |
|------------|-----------|-----------------------------------|
| <b>PNP</b> | <b>NO</b> | <b>BES M12EL-PSC15B-S04G-HM01</b> |
|------------|-----------|-----------------------------------|

|                                               |              |
|-----------------------------------------------|--------------|
| Supply voltage U <sub>B</sub>                 | 10...30 V DC |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 3.7 V      |
| Rated insulation voltage U <sub>i</sub>       | 75 V DC      |
| Rated operational current I <sub>e</sub>      | 200 mA       |
| Monitor output load capacity                  | max. 50 mA   |
| No-load supply current I <sub>0</sub> max.    | ≤ 9 mA       |
| Polarity reversal protected                   | yes          |
| Short circuit protected                       | yes          |



|                                          |              |
|------------------------------------------|--------------|
| Repeat accuracy R                        | ≤ 5 %        |
| Ambient temperature range T <sub>a</sub> | -25...+70 °C |
| Switching frequency f                    | 300 Hz       |
| Utilization category                     | DC 13        |
| Function indicator                       | yes          |

|                                    |                      |
|------------------------------------|----------------------|
| Degree of protection per IEC 60529 | IP 68 per BWN Pr. 20 |
|------------------------------------|----------------------|

|                                |                             |
|--------------------------------|-----------------------------|
| Housing material               | Stainless steel             |
| Material of sensing face       | EP                          |
| Connection                     | Connector                   |
| Approval                       | cULus                       |
| Recommended connector          | BKS-S 19-3-PY/BKS-S 20-3-PY |
| O-Ring/spare part number       | 5.3x2.4/631753              |
| Support ring/spare part number | 10x5.9x1/705918             |

|                        |                |
|------------------------|----------------|
| High pressure rated to | <b>500 bar</b> |
|------------------------|----------------|

#### Wiring diagram





## Function principle

Proximity switches with dynamic diagnostics allow monitoring of the sensor functions including the cable.

To accomplish this, the oscillator state is changed using a pulse generator while the sensor is operating. As soon as the sensor head is damaged or the oscillator becomes electrically defective, the pulse generator is no longer able to change the oscillator state and the test pulses will be missing from the output.

The pulse frequency is  $f \sim 160 \text{ Hz}$  and the pulse duration  $t \sim 300 \mu\text{s}$ . The pulse-pause ratio of  $t \sim 5\%$  selected is small enough

that the test pulses can be filtered out by the input filter of a controller, or for example a relay can be directly driven.

The information "proximity switch damped or undamped" can therefore be processed in the usual fashion.

## Function monitoring

The test pulses and thereby the function of the proximity switch are monitored by additional electronics which signal error-free function by means of a High level on the "Status/Output" message output.

For this Balluff offers a function diagnostics unit which can be easily installed in a controller:

Function diagnostics unit see page 1.5.19  
– BES 113-FD-1 (for 1 Sensor)

The unit is compatible with:

Inductive Sensors see page 1.5.18


- BES 113-356-SA6-S4 Normally open
- BES 113-356-SA31-S4 Normally open
- BES 113-3019-SA1-S4 Normally closed

Capacitive sensor see page 4.15

- BCS 20MG10-XPA1Y-8B-03 complementary.

## Installation notes


The signal line for the function diagnostics unit should be connected as closely as possible to the load  $R_L$  (Point A). When Point B is connected the cable segment between B and load  $R_L$  is not monitored.



## Note!


**The system described here is not suitable for systems with personal protection.**

For additional information please request a device description.

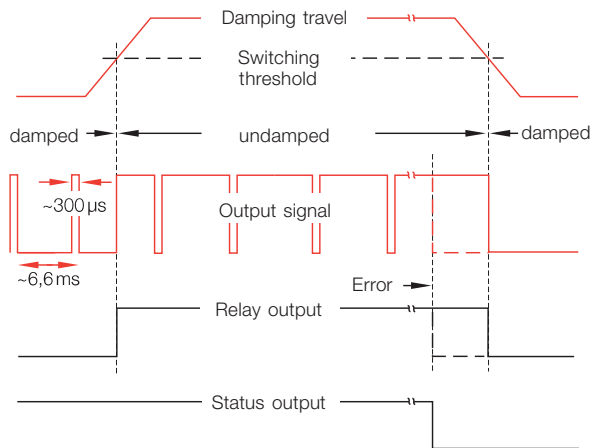

Pulse diagram of a proximity switch with function diagnostics (NC).

Single faults are detected when monitoring for the entire system.

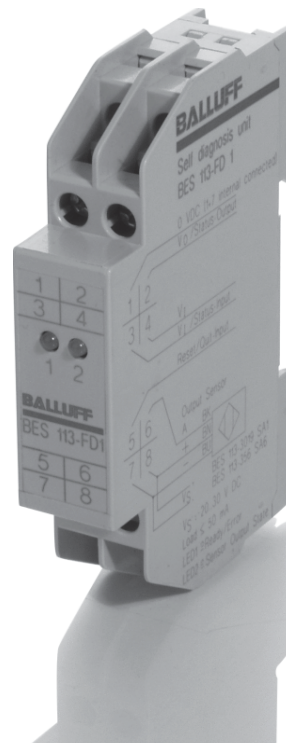

**1.5**


Factor 1  
Weld immune  
Magnetic field immune  
**Diagnostics**  
Steelface  
**Pressure rated**  
Pressure rated Ex  
Namur Ex  
Temperature rated  
PROXINOX®  
Ring Sensors  
Extended switching distance

**5**

Connectors, Holders ...  
Page 5.2 ...



|                                           |               |              |
|-------------------------------------------|---------------|--------------|
| Housing size                              | <b>M12x1</b>  | <b>M12x1</b> |
| Mounting (see notes starting p. 1.0.11)   | non-flush     | non-flush    |
| Rated operating distance s <sub>n</sub>   | <b>3.7 mm</b> | <b>4 mm</b>  |
| Assured operating distance s <sub>a</sub> | 0...3 mm      | 0...3 mm     |

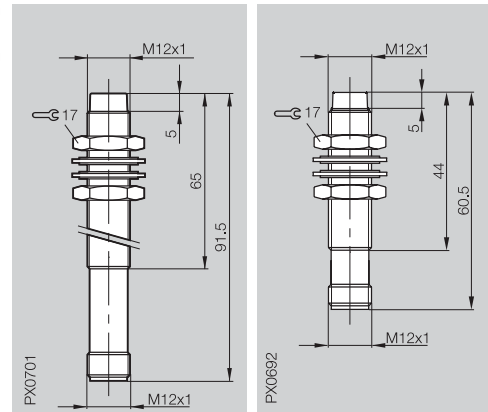

**Note!**

For function diagnostic switches with connector option, do not use connectors with integrated LED function indicator, since the LED is parallel to the load R<sub>L</sub> and cable break monitoring is then no longer assured.

The switch function can however be monitored on the LEDs in the processor.

|                                               |                                               |                                               |                     |
|-----------------------------------------------|-----------------------------------------------|-----------------------------------------------|---------------------|
| PNP                                           | NO ①                                          | BES 113-356-SA6-S4                            | BES 113-356-SA31-S4 |
|                                               | NC ②                                          | BES 113-3019-SA1-S4                           |                     |
| Supply voltage U <sub>B</sub>                 | 20...30 V DC                                  | 20...30 V DC                                  |                     |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | typ. 2.5 V                                    | typ. 3.5 V                                    |                     |
| Rated insulation voltage U <sub>i</sub>       | 75 V DC                                       | 75 V DC                                       |                     |
| Rated operational current I <sub>e</sub>      | 130 mA                                        | 130 mA                                        |                     |
| Minimum operating current I <sub>m</sub>      | 1 mA                                          | 5 mA                                          |                     |
| No-load supply current I <sub>0</sub> max.    | ≤ 25 mA                                       | ≤ 10 mA                                       |                     |
| Output resistance R <sub>a</sub>              | Open collector                                | Open collector                                |                     |
| Polarity reversal protected                   | yes                                           | yes                                           |                     |
| Short circuit protected                       | yes                                           | yes                                           |                     |
| Repeat accuracy R                             | ≤ 5 %                                         | ≤ 5 %                                         |                     |
| Effective operating distance s <sub>r</sub>   | 3.7 mm +20 %/-10 %                            | 4 mm +20 %/-10 %                              |                     |
| Ambient temperature range T <sub>a</sub>      | -25...+70 °C                                  | 0...+70 °C                                    |                     |
| Switching frequency f                         | 300 Hz                                        | 300 Hz                                        |                     |
| Utilization category                          | DC 12                                         | DC 13                                         |                     |
| Function indicator                            | no                                            | no                                            |                     |
| Degree of protection per IEC 60529            | IP 67                                         | IP 67                                         |                     |
| Housing material                              | CuZn coated                                   | CuZn coated                                   |                     |
| Material of sensing face                      | PA 12                                         | LCP                                           |                     |
| Connection                                    | Connector (cable length ≤ 50 m to controller) | Connector (cable length ≤ 50 m to controller) |                     |
| Recommended connector                         | BKS-_ 19/20-1 NO<br>BKS-_ 19/20-2 NC          | BKS-_ 19/20-1 NO                              |                     |

① Wiring diagrams see page 1.0.6



The function diagnostics unit BES 113-FD-1 monitors a proximity switch and its cable using dynamic function diagnostics. A logic circuit polls the sensor signals for the presence of test pulses and also monitors for proper function of the processor. For the machine controller it emits a High level signal on the "Status/Output" line when there is no fault and a Low signal when a fault is present. LED's indicate the switching state of the sensor.

Recurring faults are stored by the device. They must be reset using a reset function (Low signal on 5).

If the BES 113-FD-1 is used as a single unit, terminals  $V_1$  (3 and 4) must be jumpered together.

### Cascading

When cascading several BES 113-FD-1 the output (2) must be connected to the input (3) of the following device. The jumper between  $V_1$  is not needed except for the first device.

When there is a malfunction, the message appears on the last device. The defective sensor is indicated by the first weakly illuminated LED in the cascade.


Small and space-saving, the BES 113-FD-1 can be attached to a DIN rail per DIN EN 50022-35.

Description


Use

**Function diagnostics unit**  
with electronic output


For function diagnostic sensors BES 113-... (see page 1.5.18) or BCS 20... page 4.15

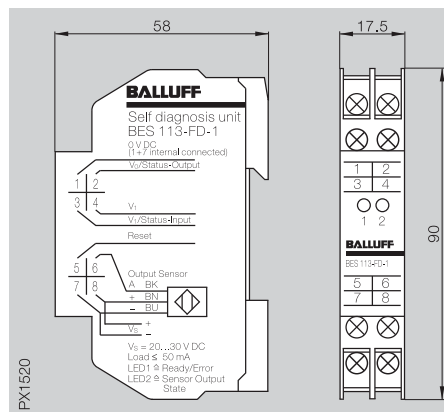

| Ordering code                      | BES 113-FD-1                                                                                                   |
|------------------------------------|----------------------------------------------------------------------------------------------------------------|
| Supply voltage $U_B$               | 20...30 V DC                                                                                                   |
| Ripple                             | $\leq 15\%$                                                                                                    |
| No-load current                    | approx. 20 mA                                                                                                  |
| Output voltage $U_0$               | 0...(0.1 $\times U_B$ )                                                                                        |
| Output current max.                | for defects in sensor or processor (fault)<br>(0.5 $\times U_B$ )... $U_B$<br>for error-free function<br>50 mA |
| Ambient temperature range          | 0...+60 °C                                                                                                     |
| LED 1 green                        | "Ready/Error" – in error-free state the LED is bright on. For defects (fault) the LED is very dim.             |
| LED 2 yellow                       | "Sensor Output State" indicates the switching state of the sensor.                                             |
| Housing attachment                 | Rail mount per DIN EN 50022-35                                                                                 |
| max. conductor cross-section       | 2 $\times$ 2.5 mm <sup>2</sup>                                                                                 |
| Degree of protection per IEC 60529 | Housing IP 40, terminals IP 20                                                                                 |

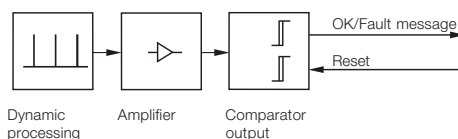

### Cascading

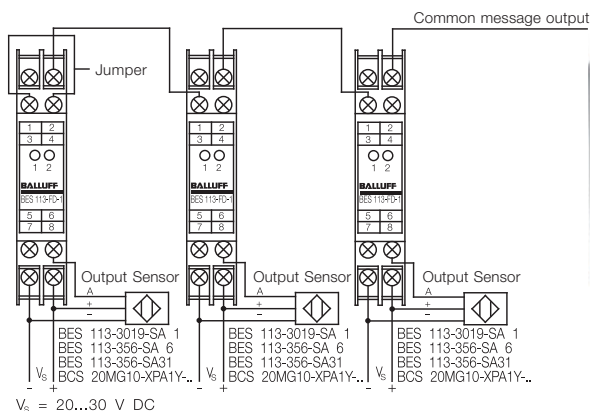

# 1.5


Factor 1  
Weld immune  
Magnetic field immune  
**Diagnostics**  
Steelface  
Pressure rated  
Pressure rated Ex  
Namur Ex  
Temperature rated  
PROXINOX®  
Ring Sensors  
Extended switching distance

# 5

Connectors, Holders ...  
Page 5.2 ...

## Inductive Sensors

DC 3-wire  
M12  
s<sub>n</sub> 6 mm

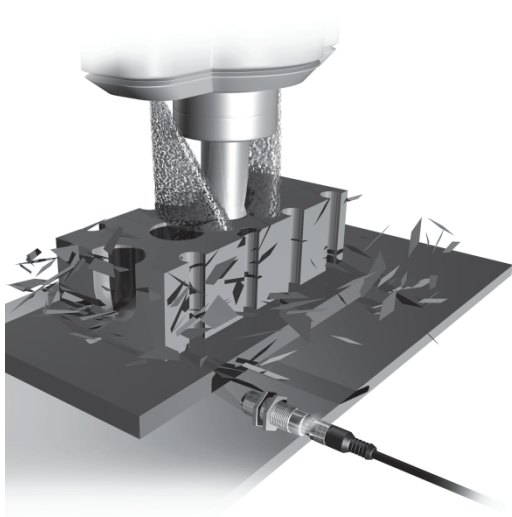


### Inductive Steelface sensors with extended switching distance

are used in especially harsh environments and applications which are too extreme for standard sensors.

Here is where they show their strengths:

- Resistance to abrasive media and aggressive cleaners and solvents
- Rugged sensing face
- Long switching distance for more function reserve – applies especially to non-flush mountable sensors

|                                                       |              |
|-------------------------------------------------------|--------------|
| Housing size                                          | <b>M12x1</b> |
| Installation type (see installation dimensions below) | quasi flush  |
| Rated operating distance s <sub>n</sub>               | <b>6 mm</b>  |
| Assured operating distance s <sub>a</sub>             | 0...4.9 mm   |

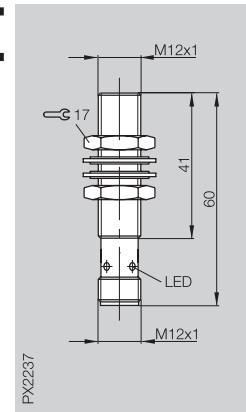

|                                                                                                |                               |   |                            |
|------------------------------------------------------------------------------------------------|-------------------------------|---|----------------------------|
| PNP                                                                                            | NO                            | ① | BES M12EG1-PSC60Z-S04G-S11 |
| NPN                                                                                            | NO                            | ④ | BES M12EG1-NSC60Z-S04G-S11 |
| Supply voltage U <sub>B</sub>                                                                  | 10...30 V DC                  |   |                            |
| Voltage drop U <sub>d</sub> at I <sub>B</sub>                                                  | ≤ 2 V                         |   |                            |
| Rated insulation voltage U <sub>i</sub>                                                        | 75 V DC                       |   |                            |
| Rated operational current I <sub>B</sub>                                                       | 200 mA                        |   |                            |
| No-load supply current I <sub>0</sub> max.                                                     | ≤ 16 mA                       |   |                            |
| Polarity reversal protected                                                                    | yes                           |   |                            |
| Short circuit protected                                                                        | yes                           |   |                            |
| Repeat accuracy R                                                                              | ≤ 5 %                         |   |                            |
| Ambient temperature range T <sub>a</sub>                                                       | -25...+70 °C                  |   |                            |
| Switching frequency f                                                                          | 400 Hz                        |   |                            |
| Utilization category                                                                           | DC 13                         |   |                            |
| Function indicator (flashes at between approx. 70 and 100 % of effective operating distance s) | yes                           |   |                            |
| Degree of protection per IEC 60529                                                             | IP 67                         |   |                            |
| Housing material                                                                               | Stainless steel               |   |                            |
| Material of sensing face                                                                       | Stainless steel               |   |                            |
| Connection                                                                                     | Connector                     |   |                            |
| Recommended connector                                                                          | BKS- 19/BKS- 20/<br>BKS-S 20E |   |                            |
| Pressure rated to                                                                              | <b>80 bar</b>                 |   |                            |

① Wiring diagrams see page 1.0.6


### Installation dimensions for quasi flush sensors (please note)






| Housing size | Dimension a | Dimension b | Dimension x | For installation in |
|--------------|-------------|-------------|-------------|---------------------|
| M12          | ≥ 50 mm     | ≥ 6 mm      | ≥ 7 mm      | Steel Fe 360        |
|              |             |             | ≥ 12 mm     | Aluminum            |
|              |             |             | ≥ 12 mm     | Brass               |
|              |             |             | ≥ 10 mm     | Stainless steel     |
| M18          | ≥ 60 mm     | ≥ 16 mm     | ≥ 14 mm     | Steel Fe 360        |
|              |             |             | ≥ 12 mm     | Aluminum            |
|              |             |             | ≥ 14 mm     | Brass               |
|              |             |             | ≥ 16 mm     | Stainless steel     |
| M30          | ≥ 90 mm     | ≥ 30 mm     | ≥ 28 mm     | Steel Fe 360        |
|              |             |             | ≥ 28 mm     | Aluminum            |
|              |             |             | ≥ 28 mm     | Brass               |
|              |             |             | ≥ 35 mm     | Stainless steel     |

Failure to observe the mounting dimensions or flush mounting may result in significant reductions in switching distance!

### Reduction factor (referenced to detection object)

| Housing size | Factor     | When mounted in             |
|--------------|------------|-----------------------------|
| M12          | 1          | Steel Fe 360                |
|              | 0.8...1    | Aluminum                    |
|              | 0.7...0.85 | Copper                      |
|              | 0.85...1.3 | Brass                       |
| M18          | 0.5/0.9    | Stainless 1 mm/≥ 2 mm thick |
|              | 1          | Steel Fe 360                |
|              | 0.8...1    | Aluminum                    |
|              | 0.7...0.85 | Copper                      |
| M30          | 0.85...1.3 | Brass                       |
|              | 0.5/0.8    | Stainless 1 mm/≥ 2 mm thick |
|              | 1          | Steel Fe 360                |
|              | 0.7...1    | Aluminum                    |
|              | 0.7...0.9  | Copper                      |
|              | 0.9...1.2  | Brass                       |
|              | 0.5/1      | Stainless 1 mm/≥ 2 mm thick |


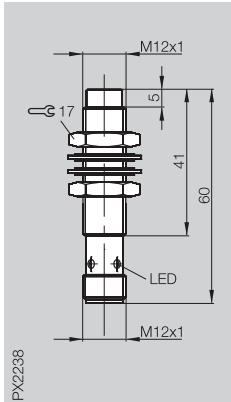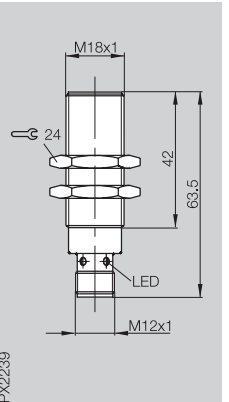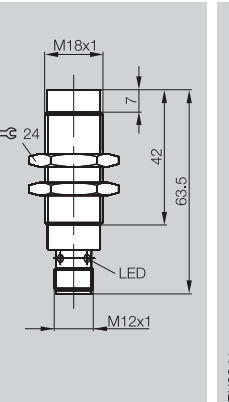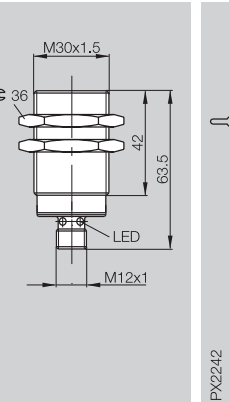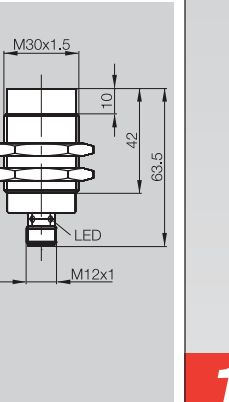
| M12x1                                                                             | M18x1                                                                             | M18x1                                                                             | M30x1.5                                                                            | M30x1.5                                                                             |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| non-flush                                                                         | quasi flush                                                                       | non-flush                                                                         | quasi flush                                                                        | non-flush                                                                           |
| 10 mm                                                                             | 10 mm                                                                             | 20 mm                                                                             | 20 mm                                                                              | 40 mm                                                                               |
| 0...8.1 mm                                                                        | 0...8.1 mm                                                                        | 0...16.2 mm                                                                       | 0...16.2 mm                                                                        | 0...32.4 mm                                                                         |
|  |  |  |  |  |
| BES M12EF1-PSC10F-S04G-S                                                          | BES M18EG1-PSC10Z-S04G-S11                                                        | BES M18EF1-PSC20F-S04G-S                                                          | BES M30EG1-PSC20Z-S04G-S11                                                         | BES M30EE1-PSC40F-S04G-S                                                            |
| BES M12EF1-NSC10F-S04G-S                                                          | BES M18EG1-NSC10Z-S04G-S11                                                        | BES M18EF1-NSC20F-S04G-S                                                          | BES M30EG1-NSC20Z-S04G-S11                                                         | BES M30EE1-NSC40F-S04G-S                                                            |
| 10...30 V DC                                                                      | 10...30 V DC                                                                      | 10...30 V DC                                                                      | 10...30 V DC                                                                       | 10...30 V DC                                                                        |
| ≤ 2 V                                                                             | ≤ 2 V                                                                             | ≤ 2 V                                                                             | ≤ 2 V                                                                              | ≤ 2 V                                                                               |
| 75 V DC                                                                           | 75 V DC                                                                           | 75 V DC                                                                           | 75 V DC                                                                            | 75 V DC                                                                             |
| 200 mA                                                                            | 200 mA                                                                            | 200 mA                                                                            | 200 mA                                                                             | 200 mA                                                                              |
| ≤ 12 mA                                                                           | ≤ 16 mA                                                                           | ≤ 12 mA                                                                           | ≤ 16 mA                                                                            | ≤ 12 mA                                                                             |
| yes                                                                               | yes                                                                               | yes                                                                               | yes                                                                                | yes                                                                                 |
| yes                                                                               | yes                                                                               | yes                                                                               | yes                                                                                | yes                                                                                 |
| ≤ 5 %                                                                             | ≤ 5 %                                                                             | ≤ 5 %                                                                             | ≤ 5 %                                                                              | ≤ 5 %                                                                               |
| -25...+70 °C                                                                      | -25...+70 °C                                                                      | -25...+70 °C                                                                      | -25...+70 °C                                                                       | -25...+70 °C                                                                        |
| 350 Hz                                                                            | 200 Hz                                                                            | 150 Hz                                                                            | 200 Hz                                                                             | 100 Hz                                                                              |
| DC 13                                                                             | DC 13                                                                             | DC 13                                                                             | DC 13                                                                              | DC 13                                                                               |
| yes                                                                               | yes                                                                               | yes                                                                               | yes                                                                                | yes                                                                                 |
| IP 67                                                                             | IP 67                                                                             | IP 67                                                                             | IP 67                                                                              | IP 67                                                                               |
| Stainless steel                                                                   | Stainless steel                                                                   | Stainless steel                                                                   | Stainless steel                                                                    | Stainless steel                                                                     |
| Stainless steel                                                                   | Stainless steel                                                                   | Stainless steel                                                                   | Stainless steel                                                                    | Stainless steel                                                                     |
| Connector                                                                         | Connector                                                                         | Connector                                                                         | Connector                                                                          | Connector                                                                           |
| BKS- 19/BKS- 20/<br>BKS-S 20E                                                     | BKS- 19/BKS- 20/<br>BKS-S 20E                                                     | BKS- 19/BKS- 20/<br>BKS-S 20E                                                     | BKS- 19/BKS- 20/<br>BKS-S 20E                                                      | BKS- 19/BKS- 20/<br>BKS-S 20E                                                       |
| 80 bar                                                                            | 60 bar                                                                            | 60 bar                                                                            | 40 bar                                                                             | 40 bar                                                                              |

# 1.5

Factor 1  
Weld immune  
Magnetic field immune  
Diagnostic  
**Steelface**  
Pressure rated  
Pressure rated Ex  
Namur Ex  
Temperature rated  
PROXINOX®  
Ring Sensors  
Extended switching distance

# 5

Connectors, Holders ...  
Page 5.2 ...


### Installation dimensions for non-flush sensors (please note)

| Housing size | Dimension a | Dimension b | Dimension x | When mounted in |
|--------------|-------------|-------------|-------------|-----------------|
| M12          | ≥ 105 mm    | ≥ 30 mm     | ≥ 25 mm     | Steel Fe 360    |
|              |             |             | ≥ 15 mm     | Aluminum        |
|              |             |             | ≥ 17 mm     | Brass           |
|              |             |             | ≥ 25 mm     | Stainless       |
| M18          | ≥ 200 mm    | ≥ 50 mm     | ≥ 45 mm     | Steel Fe 360    |
|              |             |             | ≥ 25 mm     | Aluminum        |
|              |             |             | ≥ 25 mm     | Brass           |
|              |             |             | ≥ 45 mm     | Stainless       |
| M30          | ≥ 370 mm    | ≥ 90 mm     | ≥ 70 mm     | Steel Fe 360    |
|              |             |             | ≥ 40 mm     | Aluminum        |
|              |             |             | ≥ 40 mm     | Brass           |
|              |             |             | ≥ 70 mm     | stainless steel |

Not observing the installation dimensions may result in a significant reduction in switching distance!

### Reduction factor (referenced to detection object)

| Housing size | Factor | When mounted in        |
|--------------|--------|------------------------|
| M12          | 1      | Steel Fe 360           |
|              | 1      | Aluminum               |
|              | 0.8    | Copper                 |
|              | 1      | Brass                  |
|              | 1      | Stainless ≥ 5 mm thick |
| M18          | 1      | Steel Fe 360           |
|              | 0.7    | Aluminum               |
|              | 0.7    | Copper                 |
|              | 0.7    | Brass                  |
|              | 1      | Stainless ≥ 5 mm thick |
| M30          | 1      | Steel Fe 360           |
|              | 0.7    | Aluminum               |
|              | 0.7    | Copper                 |
|              | 1      | Brass                  |
|              | 1      | Stainless ≥ 5 mm thick |



# pressure rated high pressure rated

## Inductive Sensors – pressure rated up to 100 bar and high pressure rated up to 500 bar.

In the wide range of hydraulic applications, high pressure proximity switches are exposed to many hostile environments.


Numerous applications in hydraulic cylinders and valves have resulted in this model-rich sensor line. What are your requirements?

Medium-resistant housing materials and a special sealing process result in pressure ratings from 3 to 500 bar depending on the model.

The various housing diameters and thread sizes are based on application-specific requirements.

The output amplifier is built in so that no accessory devices are necessary and the switch may be connected directly to the coil of a relay. Pressure-tight proximity switches are available with molded-in cable or with plug-in connector.

## Installation note for pressure/high-pressure rated sensors with O-ring

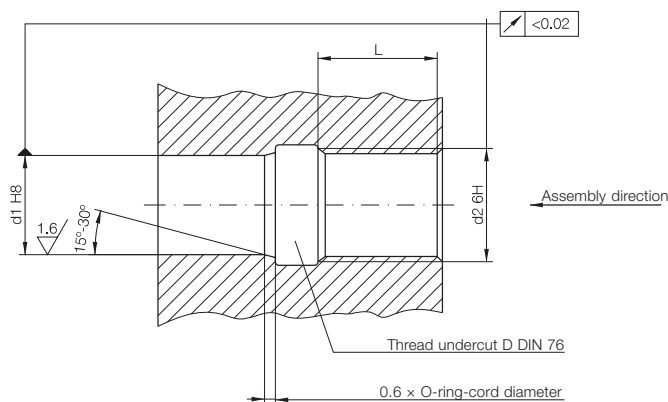


Example using BES 516-300-S270-S4-D:

d1: Ø of bore for switch head  
Ø 10<sup>H8</sup> = Ø 10<sup>+0.022</sup>

d2: nominal thread diameter M12×1 6H

L: recommended insertion depth  $L \geq 0.8 \times d_2$   
 $0.8 \times 12 = 9.6$

|                                           |               |
|-------------------------------------------|---------------|
| Housing size                              | <b>M8×1</b>   |
| Mounting (see notes starting p. 1.0.11)   | flush         |
| Rated operating distance s <sub>n</sub>   | <b>1.2 mm</b> |
| Assured operating distance s <sub>a</sub> | 0...1 mm      |

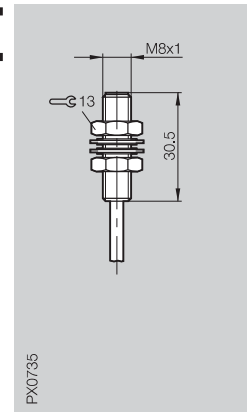


|                                               |                        |   |                     |
|-----------------------------------------------|------------------------|---|---------------------|
| PNP                                           | NO                     | ① | BES 516-324-SA17-05 |
|                                               | NC                     | ② |                     |
| Supply voltage U <sub>B</sub>                 | 10...30 V DC           |   |                     |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 1.5 V                |   |                     |
| Rated insulation voltage U <sub>i</sub>       | 75 V DC                |   |                     |
| Rated operational current I <sub>e</sub>      | 200 mA                 |   |                     |
| No-load supply current I <sub>0</sub> max.    | ≤ 20 mA                |   |                     |
| Polarity reversal protected                   | yes                    |   |                     |
| Short circuit protected                       | no                     |   |                     |
| Repeat accuracy R                             | ≤ 5 %                  |   |                     |
| Ambient temperature range T <sub>a</sub>      | -25...+70 °C           |   |                     |
| Switching frequency f                         | 1500 Hz                |   |                     |
| Utilization category                          | DC 13                  |   |                     |
| Function indicator                            | no                     |   |                     |
| Degree of protection per IEC 60529            | IP 68 per BWN Pr. 20   |   |                     |
| Housing material                              | Stainless steel        |   |                     |
| Material of sensing face                      | PA 12                  |   |                     |
| Connection                                    | 5 m PVC cable          |   |                     |
| No. of wires × cross-section                  | 3×0.14 mm <sup>2</sup> |   |                     |
| Approval                                      |                        |   |                     |
| Recommended connector                         |                        |   |                     |
| O-Ring/spare part number                      |                        |   |                     |
| Support ring/spare part number                |                        |   |                     |
| Pressure rated to                             | <b>10 bar</b>          |   |                     |

① Wiring diagrams see page 1.0.6



Other cable lengths on request.

| M8x1       | M12x1      | M12x1      | M12x1      | M18x1      |
|------------|------------|------------|------------|------------|
| flush      | flush      | flush      | flush      | flush      |
| 1.5 mm     | 1.5 mm     | 1.5 mm     | 2 mm       | 5 mm       |
| 0...1.2 mm | 0...1.2 mm | 0...1.2 mm | 0...1.6 mm | 0...4.1 mm |

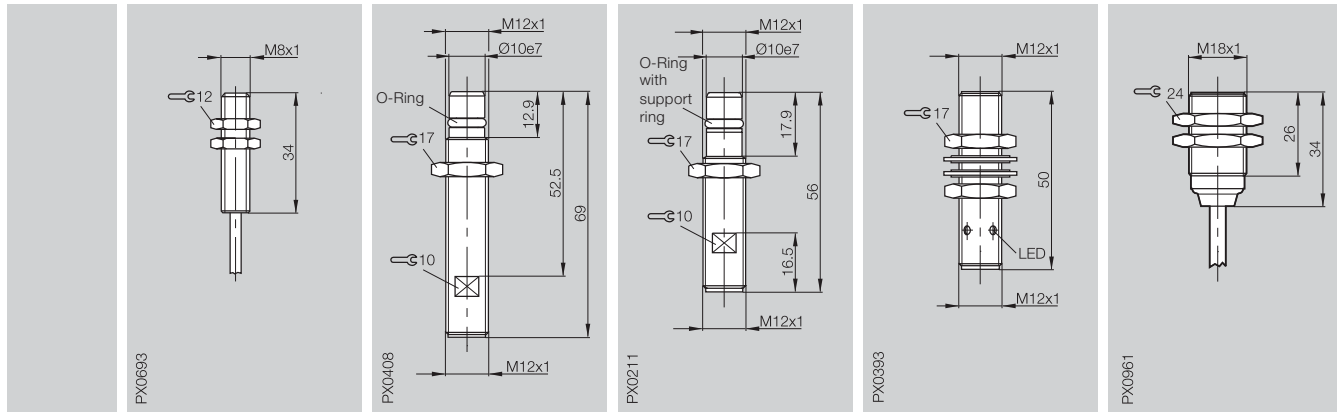

|                             |                       |                       |                         |                        |
|-----------------------------|-----------------------|-----------------------|-------------------------|------------------------|
| BES 516-300-S289-B0-D-PU-05 | BES 516-300-S270-S4-D | BES 516-300-S291-S4-D | BES 516-370-SA9-E5-C-S4 | BES 516-326-SA23-03    |
| BES 516-300-S292-B0-D-PU-05 |                       |                       |                         |                        |
| 10...30 V DC                | 10...30 V DC          | 10...30 V DC          | 10...30 V DC            | 10...30 V DC           |
| ≤ 2.5 V                     | ≤ 2 V                 | ≤ 2 V                 | ≤ 2 V                   | ≤ 3.5 V                |
| 75 V DC                     | 75 V DC               | 75 V DC               | 75 V DC                 | 75 V DC                |
| 200 mA                      | 200 mA                | 200 mA                | 200 mA                  | 130 mA                 |
| ≤ 25 mA                     | ≤ 8 mA                | ≤ 8 mA                | ≤ 10 mA                 | ≤ 20 mA                |
| yes                         | yes                   | yes                   | yes                     | yes                    |
| yes                         | yes                   | yes                   | yes                     | yes                    |
| ≤ 5 %                       | ≤ 5 %                 | ≤ 5 %                 | ≤ 5 %                   | ≤ 5 %                  |
| -25...+70 °C                | -25...+80 °C          | -25...+80 °C          | -25...+70 °C            | -25...+70 °C           |
| 1000 Hz                     | 2000 Hz               | 2000 Hz               | 5000 Hz                 | 500 Hz                 |
| DC 13                       | DC 13                 | DC 13                 | DC 13                   | DC 13                  |
| no                          | no                    | no                    | yes                     | no                     |
| IP 67                       | IP 68 per BWN Pr. 20  | IP 68 per BWN Pr. 20  | IP 68 per BWN Pr. 20    | IP 68 per BWN Pr. 20   |
| Stainless steel             | Stainless steel       | Stainless steel       | CuZn coated             | CuZn coated            |
| Ceramic                     | EP                    | EP                    | PEEK                    | PA 12                  |
| 5 m Cable PUR               | Connector             | Connector             | Connector               | 3 m cable, PVC         |
| 3x0.14 mm <sup>2</sup>      |                       |                       |                         | 3x0.34 mm <sup>2</sup> |
| cULus                       |                       |                       |                         |                        |
|                             | BKS-_ 19/BKS-_ 20     | BKS-_ 19/BKS-_ 20     | BKS-_ 19/BKS-_ 20       |                        |
|                             | 5.3x2.4/631753        | 5.3x2.4/631753        |                         |                        |
|                             |                       | 10x5.9x1/705918       |                         |                        |
| 100 bar                     | 100 bar               | 50 bar                | 10 bar                  | 10 bar                 |

For accessories  
and installation note for  
seal nut BES 08-DM-1  
see page 5.73



# 1.5

Factor 1  
Weld immune  
Magnetic field immune  
Diagnostic  
Steelface  
**Pressure rated**  
Pressure rated Ex  
Namur Ex  
Temperature rated  
PROXINOX®  
Ring Sensors  
Extended switching distance

# 5

Connectors,  
Holders ...  
Page 5.2 ...

|                                         |  |
|-----------------------------------------|--|
| Housing size                            |  |
| Mounting (see notes starting p. 1.0.11) |  |
| Rated operating distance $s_n$          |  |
| Assured operating distance $s_a$        |  |



| PNP                                | NO | ① |  |
|------------------------------------|----|---|--|
| Supply voltage $U_B$               |    |   |  |
| Voltage drop $U_d$ at $I_e$        |    |   |  |
| Rated insulation voltage $U_i$     |    |   |  |
| Rated operational current $I_e$    |    |   |  |
| No-load supply current $I_0$ max.  |    |   |  |
| Polarity reversal protected        |    |   |  |
| Short circuit protected            |    |   |  |
| Repeat accuracy R                  |    |   |  |
| Ambient temperature range $T_a$    |    |   |  |
| Switching frequency f              |    |   |  |
| Utilization category               |    |   |  |
| Function indicator                 |    |   |  |
| Degree of protection per IEC 60529 |    |   |  |
| Housing material                   |    |   |  |
| Material of sensing face           |    |   |  |
| Connection                         |    |   |  |
| No. of wires × cross-section       |    |   |  |
| Recommended connector              |    |   |  |
| O-Ring/spare part number           |    |   |  |
| Support ring/spare part number     |    |   |  |
| High pressure rated to             |    |   |  |

① Wiring diagrams see page 1.0.6

Other cable lengths on request.








# high pressure rated to 350 bar






## Inductive Sensors

DC 3-wire  
M12  
s<sub>n</sub> 1.5 mm

| M12x1<br>flush<br>1.5 mm<br>0...1.2 mm | M12x1<br>flush<br>1.5 mm<br>0...1.2 mm | M12x1<br>flush<br>1.5 mm<br>0...1.2 mm | M12x1<br>flush<br>1.5 mm<br>0...1.2 mm | M12x1<br>flush<br>1.5 mm<br>0...1.2 mm |
|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|
|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|

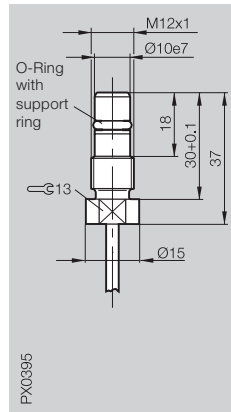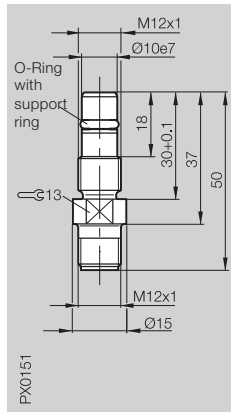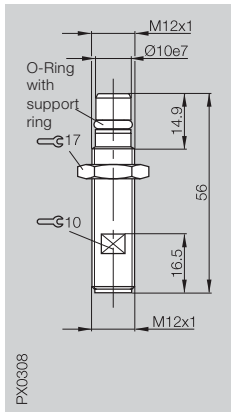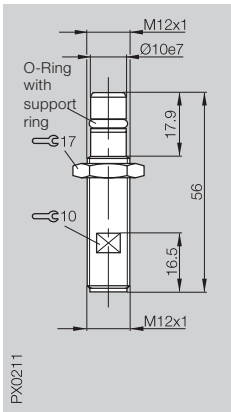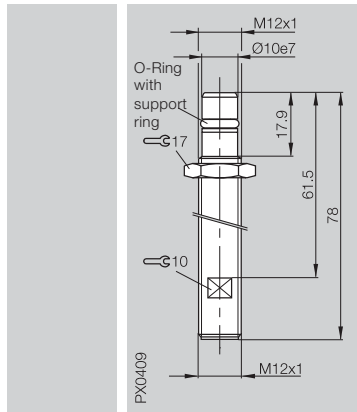

| BES 516-300-S321-S4-D                                 | BES 516-300-S322-S4-D                                 | BES 516-300-S323-S4-D                                 | BES 516-300-S324-S4-D                                 | BES 516-300-S205-D-PU-03                                         |
|-------------------------------------------------------|-------------------------------------------------------|-------------------------------------------------------|-------------------------------------------------------|------------------------------------------------------------------|
| 10...30 V DC                                          | 10...30 V DC                                          | 10...30 V DC                                          | 10...30 V DC                                          | 10...30 V DC                                                     |
| ≤ 2 V                                                 | ≤ 2 V                                                 | ≤ 2 V                                                 | ≤ 2 V                                                 | ≤ 2 V                                                            |
| 75 V DC                                               | 75 V DC                                               | 75 V DC                                               | 75 V DC                                               | 75 V DC                                                          |
| 200 mA                                                | 200 mA                                                | 200 mA                                                | 200 mA                                                | 200 mA                                                           |
| ≤ 10 mA                                               | ≤ 10 mA                                               | ≤ 10 mA                                               | ≤ 10 mA                                               | ≤ 10 mA                                                          |
| yes                                                   | yes                                                   | yes                                                   | yes                                                   | yes                                                              |
| yes                                                   | yes                                                   | yes                                                   | yes                                                   | yes                                                              |
| ≤ 5 %                                                 | ≤ 5 %                                                 | ≤ 5 %                                                 | ≤ 5 %                                                 | ≤ 5 %                                                            |
| -25...+80 °C                                          | -25...+80 °C                                          | -25...+80 °C                                          | -25...+80 °C                                          | -25...+80 °C                                                     |
| 1000 Hz                                               | 1000 Hz                                               | 1000 Hz                                               | 1000 Hz                                               | 2000 Hz                                                          |
| DC 13                                                 | DC 13                                                 | DC 13                                                 | DC 13                                                 | DC 13                                                            |
| no                                                    | no                                                    | no                                                    | no                                                    | no                                                               |
| IP 68 per BWN Pr. 20                                  | IP 68 per BWN Pr. 20                                  | IP 68 per BWN Pr. 20                                  | IP 68 per BWN Pr. 20                                  | IP 68 per BWN Pr. 20                                             |
| Stainless steel<br>EP<br>Connector                    | Stainless steel<br>EP<br>Connector                    | Stainless steel<br>EP<br>Connector                    | Stainless steel<br>EP<br>Connector                    | Stainless steel<br>EP<br>3 m Cable PUR<br>3x0.14 mm <sup>2</sup> |
| BKS- 19/BKS- 20<br>5.85x2.4/636594<br>10x5.9x1/705918 | BKS- 19/BKS- 20<br>5.85x2.4/636594<br>10x5.9x1/705918 | BKS- 19/BKS- 20<br>5.85x2.4/636594<br>10x5.9x1/705918 | BKS- 19/BKS- 20<br>5.85x2.4/636594<br>10x5.9x1/705918 | 5.3x2.4/631753<br>10x5.9x1/705918                                |
| 350 bar                                               | 350 bar                                               | 350 bar                                               | 350 bar                                               | 350 bar                                                          |



1.5

Factor 1  
Weld immune  
Magnetic field immune  
Diagnostic  
Steelface  
**Pressure rated**  
Pressure rated Ex  
Namur Ex  
Temperature rated  
PROXINOX®  
Ring Sensors  
Extended switching distance





5

Connectors, Holders ...  
Page 5.2 ...

# Inductive Sensors

DC 3-wire  
M16  
s<sub>n</sub> 1.5 mm





|                                           |               |               |               |               |  |
|-------------------------------------------|---------------|---------------|---------------|---------------|--|
| Housing size                              | <b>M16x1</b>  | <b>M16x1</b>  | <b>M16x1</b>  | <b>M16x1</b>  |  |
| Mounting (see notes starting p. 1.0.11)   | flush         | flush         | flush         | flush         |  |
| Rated operating distance s <sub>n</sub>   | <b>1.5 mm</b> | <b>1.5 mm</b> | <b>1.5 mm</b> | <b>1.5 mm</b> |  |
| Assured operating distance s <sub>a</sub> | 0...1.2 mm    | 0...1.2 mm    | 0...1.2 mm    | 0...1.2 mm    |  |

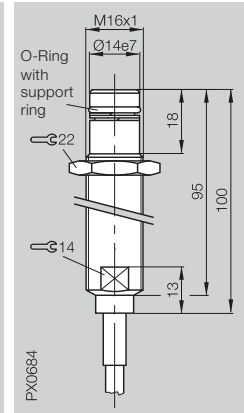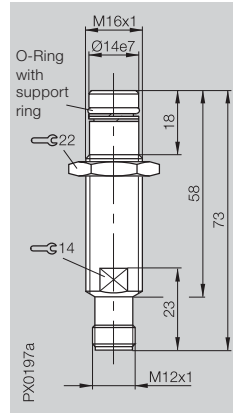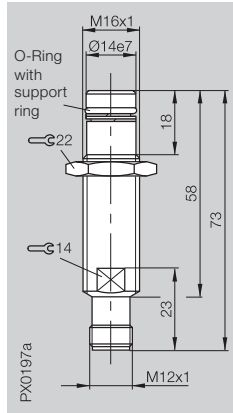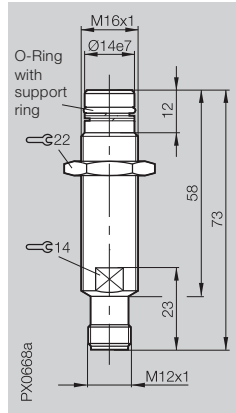

|                                               |                      |   |                       |                       |                       |                          |
|-----------------------------------------------|----------------------|---|-----------------------|-----------------------|-----------------------|--------------------------|
| PNP                                           | NO                   | ① | BES 516-300-S152-S4-D | BES 516-300-S149-S4-D | BES 516-300-S156-S4-D | BES 516-300-S237-D-PU-05 |
|                                               | NC                   | ② |                       |                       |                       |                          |
| Supply voltage U <sub>B</sub>                 | 10...30 V DC         |   | 10...30 V DC          | 10...30 V DC          | 10...30 V DC          | 10...30 V DC             |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 1.5 V              |   | ≤ 1.5 V               | ≤ 1.5 V               | ≤ 1.5 V               | ≤ 1.5 V                  |
| Rated insulation voltage U <sub>i</sub>       | 75 V DC              |   | 75 V DC               | 75 V DC               | 75 V DC               | 75 V DC                  |
| Rated operational current I <sub>e</sub>      | 200 mA               |   | 200 mA                | 200 mA                | 200 mA                | 200 mA                   |
| No-load supply current I <sub>0</sub> max.    | ≤ 10 mA              |   | ≤ 10 mA               | ≤ 10 mA               | ≤ 10 mA               | ≤ 10 mA                  |
| Polarity reversal protected                   | yes                  |   | yes                   | yes                   | yes                   | yes                      |
| Short circuit protected                       | yes                  |   | yes                   | yes                   | yes                   | yes                      |
| Repeat accuracy R                             | ≤ 5 %                |   | ≤ 5 %                 | ≤ 5 %                 | ≤ 5 %                 | ≤ 5 %                    |
| Ambient temperature range T <sub>a</sub>      | -25...+80 °C         |   | -25...+80 °C          | -25...+80 °C          | -25...+80 °C          | -25...+80 °C             |
| Switching frequency f                         | 1000 Hz              |   | 1000 Hz               | 1000 Hz               | 1000 Hz               | 1000 Hz                  |
| Utilization category                          | DC 13                |   | DC 13                 | DC 13                 | DC 13                 | DC 13                    |
| Function indicator                            | no                   |   | no                    | no                    | no                    | no                       |
| Degree of protection per IEC 60529            | IP 68 per BWN Pr. 20 |   | IP 68 per BWN Pr. 20  | IP 68 per BWN Pr. 20  | IP 68 per BWN Pr. 20  | IP 68 per BWN Pr. 20     |
| Housing material                              | Stainless steel      |   | Stainless steel       | Stainless steel       | Stainless steel       | Stainless steel          |
| Material of sensing face                      | EP                   |   | EP                    | EP                    | EP                    | EP                       |
| Connection                                    | Connector            |   | Connector             | Connector             | Connector             | 5 m Cable PUR            |
| No. of wires × cross-section                  |                      |   |                       |                       |                       | 3×0.34 mm <sup>2</sup>   |
| Approval                                      |                      |   |                       | cULus                 |                       |                          |
| Recommended connector                         | BKS-_ 19/BKS-_ 20    |   | BKS-_ 19/BKS-_ 20     | BKS-_ 19/BKS-_ 20     | BKS-_ 19/BKS-_ 20     |                          |
| O-Ring/spare part number                      | 11×1.8/703843        |   | 11×1.5/709137         | 11×1.5/709137         | 11×1.5/709137         | 11×1.8/703843            |
| Support ring/spare part number                | 14×11.1×0.7/505953   |   | 14×11.6×1.5/709136    | 14×11.6×1.5/709136    | 14×11.6×1.5/709136    | 14×11.1×0.7/505953       |
| High pressure rated to                        | <b>350 bar</b>       |   | <b>350 bar</b>        | <b>350 bar</b>        | <b>350 bar</b>        | <b>350 bar</b>           |

① Wiring diagrams see page 1.0.6

Other cable lengths on request.







# high pressure rated to 350 bar





## Inductive Sensors

DC 3-wire, M16/Ø 19,  
M16/M20, M18, Ø 10/Ø 36 mm,  
s<sub>n</sub> 1.5 mm

| M16x1/Ø 19 mm | M16x1/M20  | M18x1      | Ø 10 mm/Ø 36 mm |
|---------------|------------|------------|-----------------|
| flush         | flush      | flush      | flush           |
| 1.5 mm        | 1.5 mm     | 1.5 mm     | 1.5 mm          |
| 0...1.2 mm    | 0...1.2 mm | 0...1.2 mm | 0...1.2 mm      |

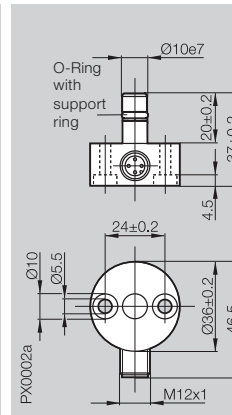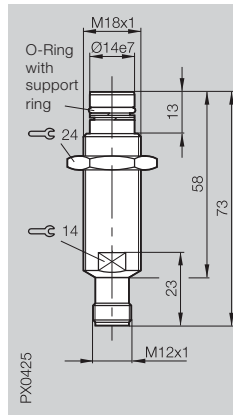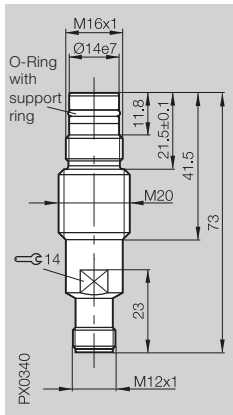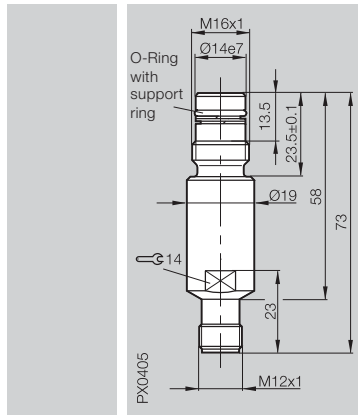

| BES 516-300-S129-S4-D | BES 516-300-S128-S4-D | BES 516-300-S144-S4-D | BES 516-300-S260-S4-D |
|-----------------------|-----------------------|-----------------------|-----------------------|
| 10...30 V DC          | 10...30 V DC          | 10...30 V DC          | 10...30 V DC          |
| ≤ 1.5 V               | ≤ 1.5 V               | ≤ 1.5 V               | ≤ 2 V                 |
| 75 V DC               | 75 V DC               | 75 V DC               | 75 V DC               |
| 200 mA                | 200 mA                | 200 mA                | 200 mA                |
| ≤ 10 mA               | ≤ 10 mA               | ≤ 10 mA               | ≤ 8 mA                |
| yes                   | yes                   | yes                   | yes                   |
| yes                   | yes                   | yes                   | yes                   |
| ≤ 5 %                 | ≤ 5 %                 | ≤ 5 %                 | ≤ 5 %                 |
| -25...+80 °C          | -25...+80 °C          | -25...+80 °C          | -25...+80 °C          |
| 1000 Hz               | 1000 Hz               | 1000 Hz               | 2000 Hz               |
| DC 13                 | DC 13                 | DC 13                 | DC 13                 |
| no                    | no                    | no                    | no                    |
| IP 68 per BWN Pr. 20  | IP 68 per BWN Pr. 20  | IP 68 per BWN Pr. 20  | IP 68 per BWN Pr. 20  |
| Stainless steel       | Stainless steel       | Stainless steel       | Stainless steel       |
| EP                    | EP                    | EP                    | EP                    |
| Connector             | Connector             | Connector             | Connector             |
| BKS-_ 19/BKS-_ 20     | BKS-_ 19/BKS-_ 20     | BKS-_ 19/BKS-_ 20     | BKS-_ 19/BKS-_ 20     |
| 11x1.8/703843         | 11x1.8/703843         | 11x1.8/703843         | 5.85x2.4/636594       |
| 14x11.1x0.7/505953    | 14x11.1x0.7/505953    | 14x11.1x0.7/505953    | 10x5.9x1/705918       |
| 350 bar               | 350 bar               | 350 bar               | 350 bar               |







1.5

Factor 1  
Weld immune  
Magnetic field immune  
Diagnostic  
Steelface  
**Pressure rated**  
Pressure rated Ex  
Namur Ex  
Temperature rated  
PROXINOX®  
Ring Sensors  
Extended switching distance

5





Connectors, Holders ...  
Page 5.2 ...

|                                                 |               |               |               |               |  |
|-------------------------------------------------|---------------|---------------|---------------|---------------|--|
| Housing size                                    | <b>M12x1</b>  | <b>M12x1</b>  | <b>M12x1</b>  | <b>M12x1</b>  |  |
| Mounting (see notes starting p. <b>1.0.11</b> ) | flush         | flush         | flush         | flush         |  |
| Rated operating distance $s_n$                  | <b>1.5 mm</b> | <b>1.5 mm</b> | <b>1.5 mm</b> | <b>1.5 mm</b> |  |
| Assured operating distance $s_a$                | 0...1.2 mm    | 0...1.2 mm    | 0...1.2 mm    | 0...1.2 mm    |  |

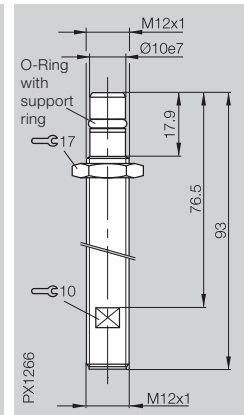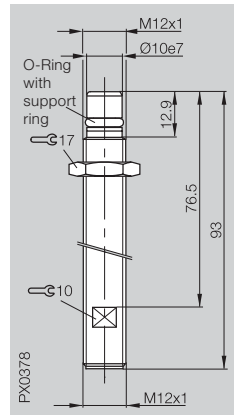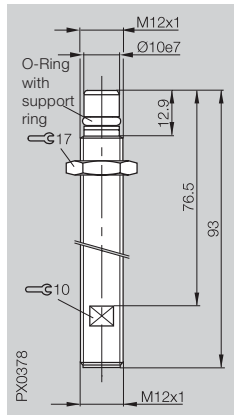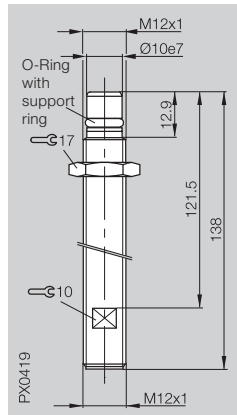

|                                               |                       |                       |                       |                       |                       |  |
|-----------------------------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|--|
| PNP                                           | NO<br>complementary ③ | BES 516-300-S164-S4-D | BES 516-300-S163-S4-D |                       | BES 516-300-S300-S4-D |  |
| NPN                                           | NO ④                  |                       |                       | BES 516-300-S242-S4-D |                       |  |
| Supply voltage U <sub>B</sub>                 | 10...30 V DC          | 10...30 V DC          | 10...30 V DC          | 10...30 V DC          | 10...30 V DC          |  |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 1.5 V               | ≤ 1.5 V               | ≤ 1.5 V               | ≤ 1.5 V               | ≤ 1.5 V               |  |
| Rated insulation voltage U <sub>i</sub>       | 75 V DC               | 75 V DC               | 75 V DC               | 75 V DC               | 75 V DC               |  |
| Rated operational current I <sub>e</sub>      | 200 mA                | 200 mA                | 200 mA                | 200 mA                | 200 mA                |  |
| No-load supply current I <sub>0</sub> max.    | ≤ 10 mA               | ≤ 10 mA               | ≤ 10 mA               | ≤ 10 mA               | ≤ 10 mA               |  |
| Polarity reversal protected                   | yes                   | yes                   | yes                   | yes                   | yes                   |  |
| Short circuit protected                       | yes                   | yes                   | yes                   | yes                   | yes                   |  |
| Repeat accuracy R                             | ≤ 5 %                 | ≤ 5 %                 | ≤ 5 %                 | ≤ 5 %                 | ≤ 5 %                 |  |
| Ambient temperature range T <sub>a</sub>      | -25...+80 °C          | -25...+80 °C          | -25...+80 °C          | -25...+80 °C          | -25...+80 °C          |  |
| Switching frequency f                         | 1000 Hz               | 1000 Hz               | 1000 Hz               | 1000 Hz               | 1000 Hz               |  |
| Utilization category                          | DC 13                 | DC 13                 | DC 13                 | DC 13                 | DC 13                 |  |
| Function indicator                            | no                    | no                    | no                    | no                    | no                    |  |
| Degree of protection per IEC 60529            | IP 68 per BWN Pr. 20  | IP 68 per BWN Pr. 20  | IP 68 per BWN Pr. 20  | IP 68 per BWN Pr. 20  | IP 68 per BWN Pr. 20  |  |
| Housing material                              | Stainless steel       | Stainless steel       | Stainless steel       | Stainless steel       | Stainless steel       |  |
| Material of sensing face                      | EP                    | EP                    | EP                    | EP                    | EP                    |  |
| Connection                                    | Connector             | Connector             | Connector             | Connector             | Connector             |  |
| Approval                                      | cULus                 | cULus                 | cULus                 | cULus                 | cULus                 |  |
| Recommended connector                         | BKS-_ 19/BKS-_ 20     | BKS-_ 19/BKS-_ 20     | BKS-_ 19/BKS-_ 20     | BKS-_ 19/BKS-_ 20     | BKS-_ 19/BKS-_ 20     |  |
| O-Ring/spare part number                      | 5.3×2.4/631753        | 5.3×2.4/631753        | 5.3×2.4/631753        | 5.3×2.4/631753        | 5.3×2.4/631753        |  |
| Support ring/spare part number                | 10×5.9×1/705918       | 10×5.9×1/705918       | 10×5.9×1/705918       | 10×5.9×1/705918       | 10×5.9×1/705918       |  |
| High pressure rated to                        | 500 bar               | 500 bar               | 500 bar               | 500 bar               | 500 bar               |  |

① Wiring diagrams see page **1.0.6**



# high pressure rated to 350 bar

## Inductive Sensors

DC 3-/4-wire  
M12  
s<sub>n</sub> 1.5 mm

| M12x1<br>flush<br>1.5 mm<br>0...1.2 mm                                                                                   | M12x1<br>flush<br>1.5 mm<br>0...1.2 mm                                                                                   | M12x1<br>flush<br>1.5 mm<br>0...1.2 mm                                                                                | M12x1<br>flush<br>1.5 mm<br>0...1.2 mm                                                                                   | M12x1<br>flush<br>1.5 mm<br>0...1.2 mm                                                                                |
|--------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
|                                                                                                                          |                                                                                                                          |                                                                                                                       |                                                                                                                          |                                                                                                                       |
| BES 516-300-S298-S4-D                                                                                                    | BES 516-300-S135-S4-D<br>BES 516-100-S45-S4-D                                                                            | BES 516-300-S162-S4-D                                                                                                 | BES 516-300-S281-S4-D                                                                                                    | BES 516-300-S265-S4-D                                                                                                 |
| 10...30 V DC<br>≤ 1.5 V<br>75 V DC<br>200 mA<br>≤ 10 mA<br>yes<br>yes<br>≤ 5 %<br>-25...+80 °C<br>1000 Hz<br>DC 13<br>no | 10...30 V DC<br>≤ 1.5 V<br>75 V DC<br>200 mA<br>≤ 10 mA<br>yes<br>yes<br>≤ 5 %<br>-25...+80 °C<br>1000 Hz<br>DC 13<br>no | 10...30 V DC<br>≤ 2 V<br>75 V DC<br>200 mA<br>≤ 8 mA<br>yes<br>yes<br>≤ 5 %<br>-25...+80 °C<br>2000 Hz<br>DC 13<br>no | 10...30 V DC<br>≤ 1.5 V<br>75 V DC<br>200 mA<br>≤ 10 mA<br>yes<br>yes<br>≤ 5 %<br>-25...+80 °C<br>1000 Hz<br>DC 13<br>no | 10...30 V DC<br>≤ 2 V<br>75 V DC<br>200 mA<br>≤ 8 mA<br>yes<br>yes<br>≤ 5 %<br>-25...+80 °C<br>2000 Hz<br>DC 13<br>no |
| IP 68 per BWN Pr. 20                                                                                                     | IP 68 per BWN Pr. 20                                                                                                     | IP 68 per BWN Pr. 20                                                                                                  | IP 68 per BWN Pr. 20                                                                                                     | IP 68 per BWN Pr. 20                                                                                                  |
| Stainless steel<br>EP<br>Connector                                                                                       | Stainless steel<br>EP<br>Connector                                                                                       | Stainless steel<br>EP<br>Connector                                                                                    | Stainless steel<br>EP<br>Connector                                                                                       | Stainless steel<br>EP<br>Connector                                                                                    |
| cULus<br>BKS- 19/BKS- 20<br>5.85x2.4/636594<br>10x5.9x1/705918                                                           | cULus<br>BKS- 19/BKS- 20<br>5.85x2.4/636594<br>10x5.9x1/705918                                                           | cULus<br>BKS- 19/BKS- 20<br>5.3x2.4/631753<br>10x5.9x1/705918                                                         | cULus<br>BKS- 19/BKS- 20<br>5.3x2.4/631753<br>10x5.9x1/705918                                                            | cULus<br>BKS- 19/BKS- 20<br>5.3x2.4/631753<br>10x5.9x1/705918                                                         |
| 500 bar                                                                                                                  | 500 bar                                                                                                                  | 500 bar                                                                                                               | 500 bar                                                                                                                  | 500 bar                                                                                                               |

Also available as  
inductive **diagnostics**  
**capable sensor**,  
see page 1.5.16







**1.5**

Factor 1  
Weld immune  
Magnetic  
field immune  
Diagnostic  
Steelface  
**Pressure  
rated**  
Pressure  
rated Ex  
Namur Ex  
Temperature  
rated  
PROXINOX®  
Ring  
Sensors  
Extended  
switching  
distance

**5**

Connectors,  
Holders ...  
Page 5.2 ...





|                                           |               |               |               |               |
|-------------------------------------------|---------------|---------------|---------------|---------------|
| Housing size                              | <b>M12x1</b>  | <b>M12x1</b>  | <b>M12x1</b>  | <b>M12x1</b>  |
| Mounting (see notes starting p. 1.0.11)   | flush         | flush         | flush         | flush         |
| Rated operating distance s <sub>n</sub>   | <b>1.5 mm</b> | <b>1.5 mm</b> | <b>1.5 mm</b> | <b>1.5 mm</b> |
| Assured operating distance s <sub>a</sub> | 0...1.2 mm    | 0...1.2 mm    | 0...1.2 mm    | 0...1.2 mm    |

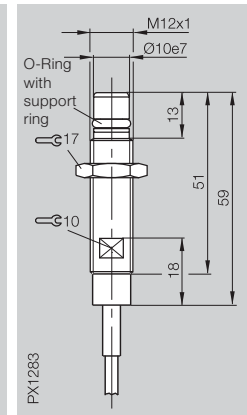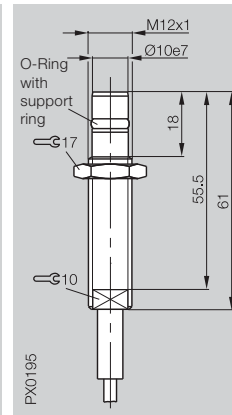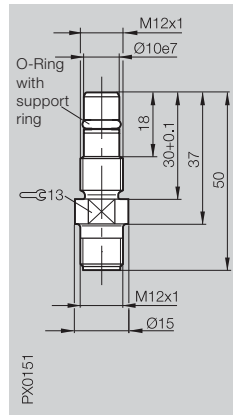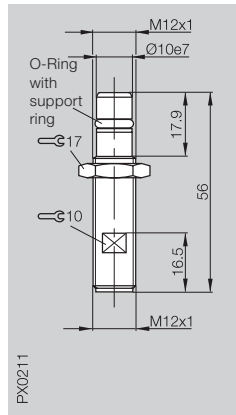

|                                               |                      |   |                       |                       |                          |                          |
|-----------------------------------------------|----------------------|---|-----------------------|-----------------------|--------------------------|--------------------------|
| PNP                                           | NO                   | ① | BES 516-300-S249-S4-D | BES 516-300-S262-S4-D | BES 516-300-S135-D-PU-05 | BES 516-300-S162-D-PU-05 |
|                                               | NC                   | ② | BES 516-300-S305-S4-D |                       | BES 516-300-S178-D-PU-05 |                          |
| Supply voltage U <sub>B</sub>                 | 10...30 V DC         |   | 10...30 V DC          | 10...30 V DC          | 10...30 V DC             | 10...30 V DC             |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 2 V                |   | ≤ 2 V                 | ≤ 2 V                 | ≤ 1.5 V                  | ≤ 2 V                    |
| Rated insulation voltage U <sub>i</sub>       | 75 V DC              |   | 75 V DC               | 75 V DC               | 75 V DC                  | 75 V DC                  |
| Rated operational current I <sub>e</sub>      | 200 mA               |   | 200 mA                | 200 mA                | 200 mA                   | 200 mA                   |
| No-load supply current I <sub>0</sub> max.    | ≤ 8 mA               |   | ≤ 8 mA                | ≤ 8 mA                | ≤ 10 mA                  | ≤ 8 mA                   |
| Polarity reversal protected                   | yes                  |   | yes                   | yes                   | yes                      | yes                      |
| Short circuit protected                       | yes                  |   | yes                   | yes                   | yes                      | yes                      |
| Repeat accuracy R                             | ≤ 5 %                |   | ≤ 5 %                 | ≤ 5 %                 | ≤ 5 %                    | ≤ 5 %                    |
| Ambient temperature range T <sub>a</sub>      | -25...+80 °C         |   | -25...+80 °C          | -25...+80 °C          | -25...+80 °C             | -25...+80 °C             |
| Switching frequency f                         | 2000 Hz              |   | 2000 Hz               | 2000 Hz               | 1000 Hz                  | 2000 Hz                  |
| Utilization category                          | DC 13                |   | DC 13                 | DC 13                 | DC 13                    | DC 13                    |
| Function indicator                            | no                   |   | no                    | no                    | no                       | no                       |
| Degree of protection per IEC 60529            | IP 68 per BWN Pr. 20 |   | IP 68 per BWN Pr. 20  | IP 68 per BWN Pr. 20  | IP 68 per BWN Pr. 20     | IP 68 per BWN Pr. 20     |
| Housing material                              | Stainless steel      |   | Stainless steel       | Stainless steel       | Stainless steel          | Stainless steel          |
| Material of sensing face                      | EP                   |   | EP                    | EP                    | EP                       | EP                       |
| Connection                                    | Connector            |   | Connector             | Connector             | 5 m Cable PUR            | 5 m Cable PUR            |
| No. of wires × cross-section                  |                      |   |                       |                       | 3×0.14 mm <sup>2</sup>   | 3×0.14 mm <sup>2</sup>   |
| Approval                                      | cULus                |   | cULus                 | cULus                 | cULus                    |                          |
| Recommended connector                         | BKS-_ 19/BKS-_ 20    |   | BKS-_ 19/BKS-_ 20     | BKS-_ 19/BKS-_ 20     |                          |                          |
| O-Ring/spare part number                      | 5.3×2.4/631753       |   | 5.3×2.4/631753        | 5.3×2.4/631753        | 5.85×2.4/636594          | 5.3×2.4/631753           |
| Support ring/spare part number                | 10×5.9×1/705918      |   | 10×5.9×1/705918       | 10×5.9×1/705918       | 10×5.9×1/705918          | 10×5.9×1/705918          |
| High pressure rated to                        | <b>500 bar</b>       |   | <b>500 bar</b>        | <b>500 bar</b>        | <b>500 bar</b>           | <b>500 bar</b>           |

① Wiring diagrams see page 1.0.6

Other cable lengths on request.






# high pressure rated to 350 bar




## Inductive Sensors

DC 3-wire  
M12, M18  
s<sub>n</sub> 1.5 mm, 3 mm

| M12x1      | M18x1      | M18x1      |  |  |
|------------|------------|------------|--|--|
| flush      | flush      | flush      |  |  |
| 1.5 mm     | 3 mm       | 3 mm       |  |  |
| 0...1.2 mm | 0...2.1 mm | 0...2.1 mm |  |  |

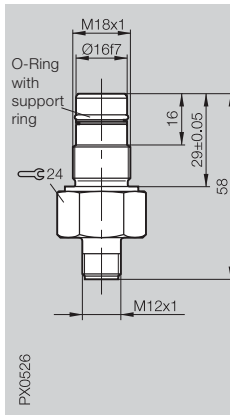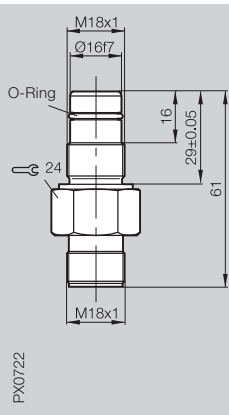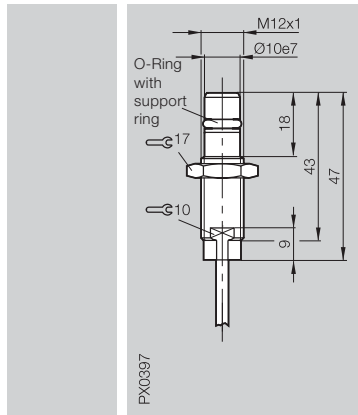

|                          |                      |                      |  |  |
|--------------------------|----------------------|----------------------|--|--|
| BES 516-300-S240-D-PU-03 | BES 516-300-S203     | BES 516-300-S190-S4  |  |  |
| 10...30 V DC             | 10...30 V DC         | 10...30 V DC         |  |  |
| ≤ 2 V                    | ≤ 3.5 V              | ≤ 3.5 V              |  |  |
| 75 V DC                  | 75 V DC              | 75 V DC              |  |  |
| 200 mA                   | 130 mA               | 130 mA               |  |  |
| ≤ 8 mA                   | ≤ 20 mA              | ≤ 25 mA              |  |  |
| yes                      | yes                  | yes                  |  |  |
| yes                      | yes                  | yes                  |  |  |
| ≤ 5 %                    | ≤ 5 %                | ≤ 5 %                |  |  |
| -25...+80 °C             | -25...+80 °C         | -25...+80 °C         |  |  |
| 2000 Hz                  | 1000 Hz              | 400 Hz               |  |  |
| DC 13                    | DC 13                | DC 13                |  |  |
| no                       | no                   | no                   |  |  |
| IP 68 per BWN Pr. 20     | IP 68 per BWN Pr. 20 | IP 68 per BWN Pr. 20 |  |  |
| Stainless steel          | Stainless steel      | Stainless steel      |  |  |
| EP                       | PEEK                 | PEEK                 |  |  |
| 3 m Cable PUR            | Connector            | Connector            |  |  |
| 3x0.14 mm <sup>2</sup>   |                      |                      |  |  |
| cULus                    |                      |                      |  |  |
| 5.85x2.4/636594          | BKS-S 7-1            | BKS-_ 19/BKS-_ 20    |  |  |
| 10x5.9x1/705918          | 13x1.5/619531        | 13x1.5/619531        |  |  |
|                          | 16x13.8x0.5/635431   |                      |  |  |
| 500 bar                  | 500 bar              | 500 bar              |  |  |




**1.5**

Factor 1  
Weld immune  
Magnetic field immune  
Diagnostic  
Steelface  
**Pressure rated**  
Pressure rated Ex  
Namur Ex  
Temperature rated  
PROXINOX®  
Ring Sensors  
Extended switching distance



**5**

Connectors, Holders ...  
Page 5.2 ...



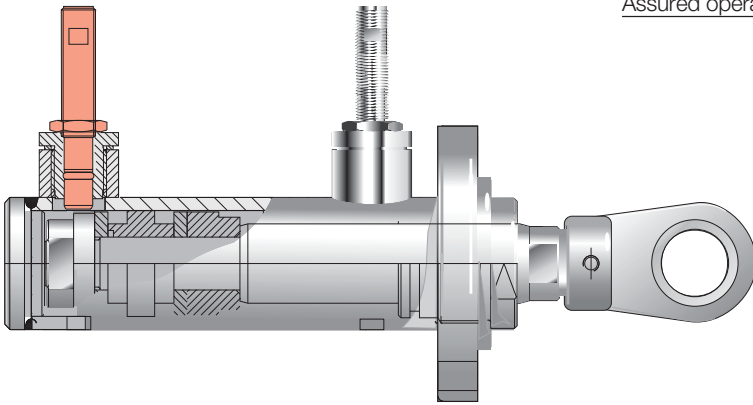

|                                           |               |
|-------------------------------------------|---------------|
| Housing size                              | <b>M12x1</b>  |
| Mounting (see notes starting p. 1.0.11)   | flush         |
| Rated operating distance s <sub>n</sub>   | <b>1.5 mm</b> |
| Assured operating distance s <sub>a</sub> | 0...1.2 mm    |

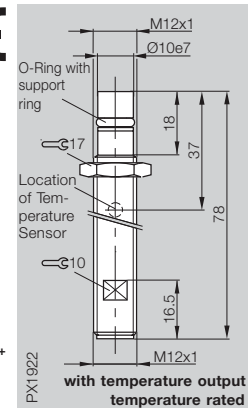

**High-End versions of the high pressure rated sensors** are available in two series:

- Long switching distances to 2.5 mm (max. 90 °C ambient temperature) or
- High temperatures to 120° C (switching distance 1.5 mm)
- Both versions pressure rated to 500 bar just like our traditional high-pressure models

**Ambient temperatures to +120 °C**

- Especially suited for modern high-performance hydraulic systems
- For newer hydraulic fluids that can become hot
- For hydraulic cylinders on high-temperature injection molds

## Temperature output

To measure temperature changes inside the cylinder the BHS ...T01 has an integrated temperature sensor that outputs the measured temperature as a voltage.


## Part numbering

BHS ...-PSD15-S04  
Rated operating distance **1.5 mm**  
Ambient temperature range **-25...+120 °C**


BHS ...-PSD15-S04-**T01** with additional temperature output

| PNP                                           | NO | ① | BHS B135V-PSD15-S04-T01 |
|-----------------------------------------------|----|---|-------------------------|
| Supply voltage U <sub>B</sub>                 |    |   | 10...30 V DC            |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> |    |   | ≤ 2.5 V                 |
| Rated insulation voltage U <sub>i</sub>       |    |   | 75 V DC                 |
| Rated operational current I <sub>e</sub>      |    |   | 200 mA                  |
| No-load supply current I <sub>0</sub> max.    |    |   | ≤ 8 mA                  |
| Polarity reversal protected                   |    |   | yes                     |
| Short circuit protected                       |    |   | yes                     |
| Repeat accuracy R                             |    |   | ≤ 5 %                   |
| Ambient temperature range T <sub>a</sub>      |    |   | <b>-25...+120 °C</b>    |
| Switching frequency f                         |    |   | 400 Hz                  |
| Utilization category                          |    |   | DC 13                   |
| Function indicator                            |    |   | no                      |
| Degree of protection per IEC 60529            |    |   | IP 68 per BWN Pr. 20    |
| Housing material                              |    |   | Stainless steel         |
| Material of sensing face                      |    |   | Ceramic                 |
| Connection                                    |    |   | Connector               |
| Approval                                      |    |   | cULus                   |
| Recommended connector                         |    |   | BKS-S 19-3-PY/S 20-3-PY |
| O-Ring/spare part number                      |    |   | 6.75x1.78/149621        |
| Support ring/spare part number                |    |   | 10x7x1.8/150229         |
| High pressure rated to                        |    |   | <b>500 bar</b>          |

① Wiring diagrams see page 1.0.6  
Exception:  
BHS B135V-PSD15-S04-T01 see above









## Current reduction as a function of ambient temperature range








## Temperature output

$$U \text{ (V)} = 1 + 0.03 \times (T + 25)$$


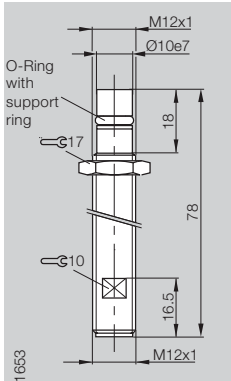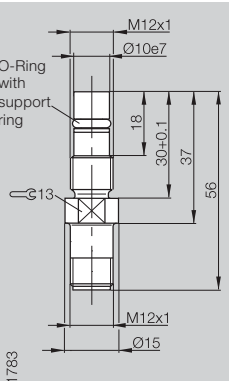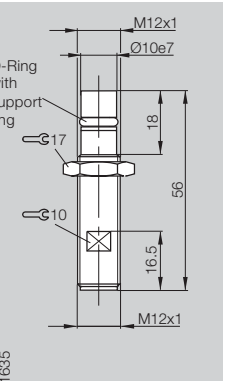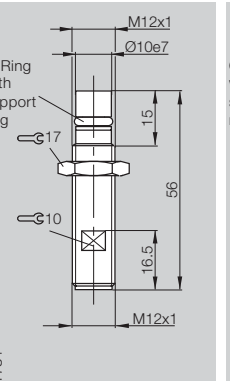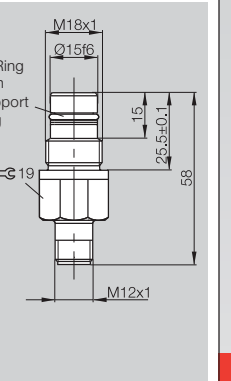
| M12x1<br>flush<br>1.5 mm<br>0...1.2 mm                                            | M12x1<br>flush<br>1.5 mm<br>0...1.2 mm                                            | M12x1<br>flush<br>1.5 mm<br>0...1.2 mm                                            | M12x1<br>flush<br>1.5 mm<br>0...1.2 mm                                             | M18x1<br>flush<br>1.5 mm<br>0...1.2 mm                                              |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |
| PX1653                                                                            | PX1783                                                                            | PX1635                                                                            | PX1784                                                                             | PX1834                                                                              |
| temperature rated                                                                 | temperature rated                                                                 | temperature rated                                                                 | temperature rated                                                                  | temperature rated                                                                   |

| BHS B135V-PSD15-S04  | BHS B400V-PSD15-S04  | BHS B249V-PSD15-S04  | BHS B265V-PSD15-S04  | BHS E308V-PSD15-S04  |
|----------------------|----------------------|----------------------|----------------------|----------------------|
| 10...30 V DC         | 10...30 V DC         | 10...30 V DC         | 10...30 V DC         | 10...30 V DC         |
| ≤ 2.5 V              | ≤ 2.5 V              | ≤ 2.5 V              | ≤ 2.5 V              | ≤ 2.5 V              |
| 75 V DC              | 75 V DC              | 75 V DC              | 75 V DC              | 75 V DC              |
| 200 mA               | 200 mA               | 200 mA               | 200 mA               | 200 mA               |
| ≤ 8 mA               | ≤ 8 mA               | ≤ 8 mA               | ≤ 8 mA               | ≤ 8 mA               |
| yes                  | yes                  | yes                  | yes                  | yes                  |
| yes                  | yes                  | yes                  | yes                  | yes                  |
| ≤ 5 %                | ≤ 5 %                | ≤ 5 %                | ≤ 5 %                | ≤ 5 %                |
| <b>-25...+120 °C</b> | <b>-25...+120 °C</b> | <b>-25...+120 °C</b> | <b>-25...+120 °C</b> | <b>-25...+120 °C</b> |
| 400 Hz               | 400 Hz               | 400 Hz               | 400 Hz               | 400 Hz               |
| DC 13                | DC 13                | DC 13                | DC 13                | DC 13                |
| no                   | no                   | no                   | no                   | no                   |
| IP 68 per BWN Pr. 20 | IP 68 per BWN Pr. 20 | IP 68 per BWN Pr. 20 | IP 68 per BWN Pr. 20 | IP 68 per BWN Pr. 20 |
| Stainless steel      | Stainless steel      | Stainless steel      | Stainless steel      | Stainless steel      |
| Ceramic              | Ceramic              | Ceramic              | Ceramic              | Ceramic              |
| Connector            | Connector            | Connector            | Connector            | Connector            |
| cULus                | cULus                | cULus                | cULus                | cULus                |
| BKS-B 19/B 20-1-PU2  | BKS-B 19/B 20-1-PU2  | BKS-B 19/B 20-1-PU2  | BKS-B 19/B 20-1-PU2  | BKS-B 19/B 20-1-PU2  |
| 6.75x1.78/149621     | 6.75x1.78/149621     | 6.75x1.78/149621     | 6.75x1.78/149621     | 12.42x1.78/130654    |
| 10x7x1.8/150229      | 10x7x1.8/150229      | 10x7x1.8/150229      | 10x7x1.8/150229      | 15x12.2x0.7/642827   |
| <b>500 bar</b>       | <b>500 bar</b>       | <b>500 bar</b>       | <b>500 bar</b>       | <b>500 bar</b>       |



Simulation (FEM method)  
of the stress distribution  
under high pressure on  
housing and ceramic cap



**1.5**

Factor 1  
Weld immune  
Magnetic  
field immune  
Diagnostic  
Steelface  
**Pressure  
rated**  
Pressure  
rated Ex  
Namur Ex  
**Temperature  
rated**  
PROXINOX®  
Ring  
Sensors  
Extended  
switching  
distance




**5**

Connectors,  
Holders ...  
Page 5.2 ...

## Inductive Sensors

DC 3-wire  
M12  
s<sub>n</sub> 2.5 mm




|                                           |               |               |               |
|-------------------------------------------|---------------|---------------|---------------|
| Housing size                              | <b>M12x1</b>  | <b>M12x1</b>  | <b>M12x1</b>  |
| Mounting (see notes starting p. 1.0.11)   | flush         | flush         | flush         |
| Rated operating distance s <sub>n</sub>   | <b>2.5 mm</b> | <b>2.5 mm</b> | <b>2.5 mm</b> |
| Assured operating distance s <sub>a</sub> | 0...2 mm      | 0...2 mm      | 0...2 mm      |

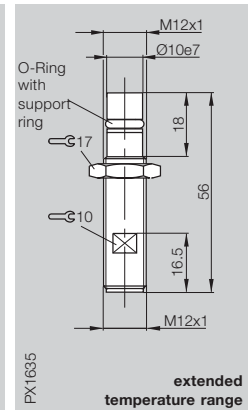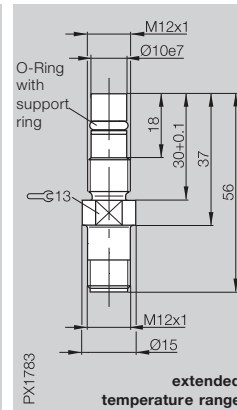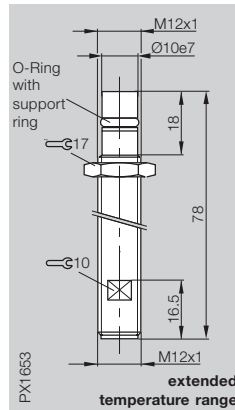


|                                               |           |          |                                |                                |                                |
|-----------------------------------------------|-----------|----------|--------------------------------|--------------------------------|--------------------------------|
| <b>PNP</b>                                    | <b>NO</b> | <b>①</b> | <b>BHS B135V-PSD25-S04-003</b> | <b>BHS B400V-PSD25-S04-003</b> | <b>BHS B249V-PSD25-S04-003</b> |
| Supply voltage U <sub>B</sub>                 |           |          | 10...30 V DC                   | 10...30 V DC                   | 10...30 V DC                   |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> |           |          | ≤ 2.5 V                        | ≤ 2.5 V                        | ≤ 2.5 V                        |
| Rated insulation voltage U <sub>i</sub>       |           |          | 75 V DC                        | 75 V DC                        | 75 V DC                        |
| Rated operational current I <sub>e</sub>      |           |          | 200 mA                         | 200 mA                         | 200 mA                         |
| No-load supply current I <sub>0</sub> max.    |           |          | ≤ 8 mA                         | ≤ 8 mA                         | ≤ 8 mA                         |
| Polarity reversal protected                   |           |          | yes                            | yes                            | yes                            |
| Short circuit protected                       |           |          | yes                            | yes                            | yes                            |
| Repeat accuracy R                             |           |          | ≤ 5 %                          | ≤ 5 %                          | ≤ 5 %                          |
| Ambient temperature range T <sub>a</sub>      |           |          | <b>-25...+90 °C</b>            | <b>-25...+90 °C</b>            | <b>-25...+90 °C</b>            |
| Switching frequency f                         |           |          | 400 Hz                         | 400 Hz                         | 400 Hz                         |
| Utilization category                          |           |          | DC 13                          | DC 13                          | DC 13                          |
| Function indicator                            |           |          | no                             | no                             | no                             |
| Degree of protection per IEC 60529            |           |          | IP 68 per BWN Pr. 20           | IP 68 per BWN Pr. 20           | IP 68 per BWN Pr. 20           |
| Housing material                              |           |          | Stainless steel                | Stainless steel                | Stainless steel                |
| Material of sensing face                      |           |          | Ceramic                        | Ceramic                        | Ceramic                        |
| Connection                                    |           |          | Connector                      | Connector                      | Connector                      |
| Approval                                      |           |          | cULus                          | cULus                          | cULus                          |
| Recommended connector                         |           |          | BKS-B 19/B 20-1-PU2            | BKS-B 19/B 20-1-PU2            | BKS-B 19/B 20-1-PU2            |
| O-Ring/spare part number                      |           |          | 6.75x1.78/149621               | 6.75x1.78/149621               | 6.75x1.78/149621               |
| Support ring/spare part number                |           |          | 10x7x1.8/150229                | 10x7x1.8/150229                | 10x7x1.8/150229                |
| High pressure rated to                        |           |          | <b>500 bar</b>                 | <b>500 bar</b>                 | <b>500 bar</b>                 |

① Wiring diagrams see page 1.0.6




Other cable lengths on request.






### Current reduction as a function of ambient temperature range

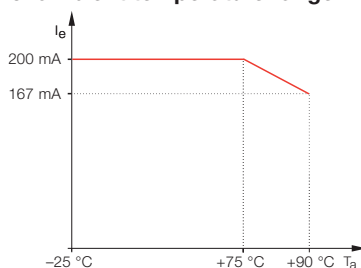

| M12x1<br>flush<br>2.5 mm<br>0...2 mm | M12x1<br>flush<br>2.5 mm<br>0...2 mm | M12x1<br>flush<br>2.5 mm<br>0...2 mm |
|--------------------------------------|--------------------------------------|--------------------------------------|
|--------------------------------------|--------------------------------------|--------------------------------------|

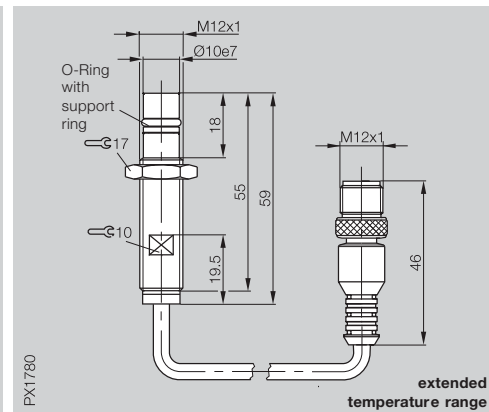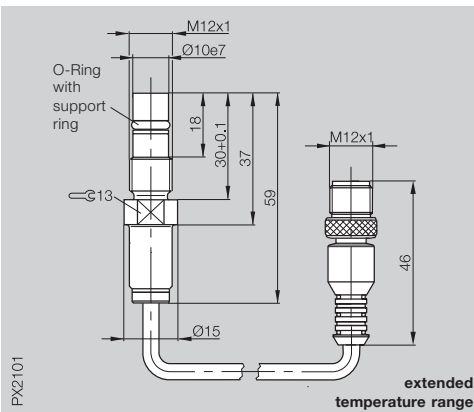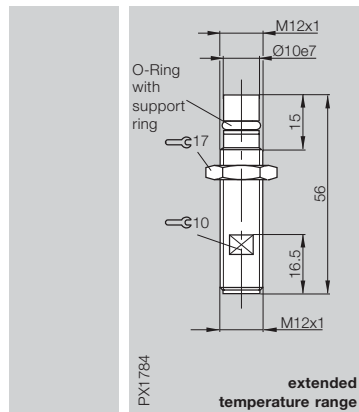

| BHS B265V-PSD25-S04-003 | BHS B400V-PSD25-BP00,2-S04-003 | BHS B249V-PSD25-BP00,2-S04-003 |
|-------------------------|--------------------------------|--------------------------------|
| 10...30 V DC            | 10...30 V DC                   | 10...30 V DC                   |
| ≤ 2.5 V                 | ≤ 2.5 V                        | ≤ 2.5 V                        |
| 75 V DC                 | 75 V DC                        | 75 V DC                        |
| 200 mA                  | 200 mA                         | 200 mA                         |
| ≤ 8 mA                  | ≤ 8 mA                         | ≤ 8 mA                         |
| yes                     | yes                            | yes                            |
| yes                     | yes                            | yes                            |
| ≤ 5 %                   | ≤ 5 %                          | ≤ 5 %                          |
| <b>-25...+90 °C</b>     | <b>-25...+90 °C</b>            | <b>-25...+90 °C</b>            |
| 400 Hz                  | 400 Hz                         | 400 Hz                         |
| DC 13                   | DC 13                          | DC 13                          |
| no                      | no                             | no                             |
| IP 68 per BWN Pr. 20    | IP 68 per BWN Pr. 20           | IP 67                          |
| Stainless steel         | Stainless steel                | Stainless steel                |
| Ceramic                 | Ceramic                        | Ceramic                        |
| Connector               | 0.2 m PUR cable with connector | 0.2 m PUR cable with connector |
| cULus                   | cULus                          | cULus                          |
| BKS-B 19/B 20-1-PU2     | BKS-B 19-1-PU2                 | BKS-B 19-1-PU2                 |
| 6.75x1.78/149621        | 6.75x1.78/149621               | 6.75x1.78/149621               |
| 10x7x1.8/150229         | 10x7x1.8/150229                | 10x7x1.8/150229                |
| <b>500 bar</b>          | <b>500 bar</b>                 | <b>500 bar</b>                 |



Simulation (FEM method)  
of the stress distribution  
under high pressure on  
housing and ceramic cap



**1.5**

Factor 1  
Weld immune  
Magnetic field immune  
Diagnostic  
Steelface  
**Pressure rated**  
Pressure rated Ex  
Namur Ex  
Temperature rated  
PROXINOX®  
Ring Sensors  
Extended switching distance

**5**

Connectors,  
Holders ...  
Page 5.2 ...

Sensors with ATEX  
approval Category 3G

Devices in this category  
are designed for use  
in areas where explosive  
atmospheres occur  
infrequently.

Note!

Before design, installation  
and startup, please read  
the operating manual found  
at [www.balluff.com](http://www.balluff.com).



|                                         |  |
|-----------------------------------------|--|
| Housing size                            |  |
| Mounting (see notes starting p. 1.0.11) |  |
| Rated operating distance $s_n$          |  |
| Assured operating distance $s_a$        |  |



| PNP                                | NO | ① |  |
|------------------------------------|----|---|--|
| Supply voltage $U_B$               |    |   |  |
| Voltage drop $U_d$ at $I_e$        |    |   |  |
| Rated insulation voltage $U_i$     |    |   |  |
| Rated operational current $I_e$    |    |   |  |
| No-load supply current $I_0$ max.  |    |   |  |
| Polarity reversal protected        |    |   |  |
| Short circuit protected            |    |   |  |
| Repeat accuracy R                  |    |   |  |
| Ambient temperature range $T_a$    |    |   |  |
| Switching frequency f              |    |   |  |
| Utilization category               |    |   |  |
| Function indicator                 |    |   |  |
| Degree of protection per IEC 60529 |    |   |  |
| Housing material                   |    |   |  |
| Material of sensing face           |    |   |  |
| Connection                         |    |   |  |
| Recommended connector              |    |   |  |
| O-Ring/spare part number           |    |   |  |
| Support ring/spare part number     |    |   |  |
| Pressure rated (hydraulic) up to   |    |   |  |
| Ex-Zone                            |    |   |  |
| Conformity                         |    |   |  |
| Designation                        |    |   |  |

① Wiring diagrams see page 1.0.6








# high pressure rated






## Inductive Sensors

DC 3-wire  
M12, M18  
s<sub>n</sub> 1.5 mm

| M12x1<br>flush<br>1.5 mm<br>0...1.2 mm | M12x1<br>flush<br>1.5 mm<br>0...1.2 mm | M12x1<br>flush<br>1.5 mm<br>0...1.2 mm | M12x1<br>flush<br>1.5 mm<br>0...1.2 mm | M18x1<br>flush<br>1.5 mm<br>0...1.2 mm |
|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|
|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|

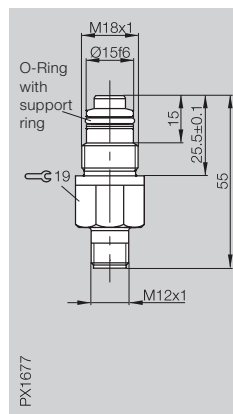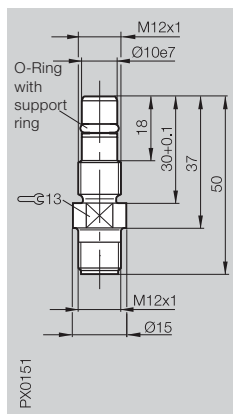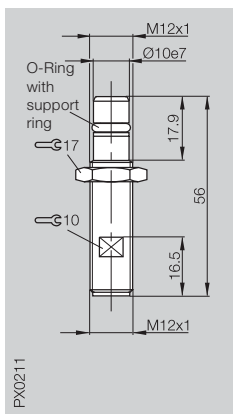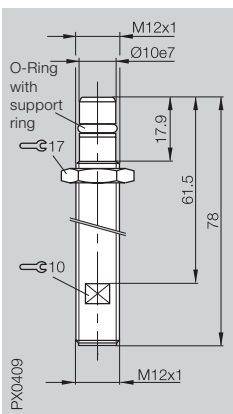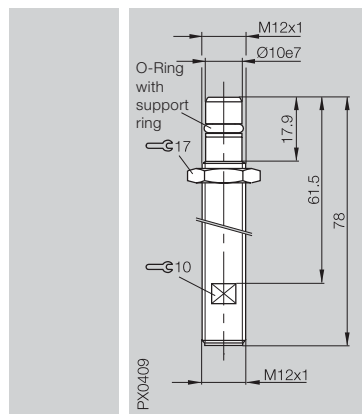

| BES 516-300-S321-NEX-S4-D                                               | BES 516-300-S135-NEX-S4-D                                               | BES 516-300-S249-NEX-S4-D                                               | BES 516-300-S262-NEX-S4-D                                               | BES 516-300-S308-NEX-S4-D                                               |
|-------------------------------------------------------------------------|-------------------------------------------------------------------------|-------------------------------------------------------------------------|-------------------------------------------------------------------------|-------------------------------------------------------------------------|
| 10...30 V DC                                                            | 10...30 V DC                                                            | 10...30 V DC                                                            | 10...30 V DC                                                            | 10...30 V DC                                                            |
| ≤ 2 V                                                                   | ≤ 2 V                                                                   | ≤ 2 V                                                                   | ≤ 2 V                                                                   | ≤ 2 V                                                                   |
| 75 V DC                                                                 | 75 V DC                                                                 | 75 V DC                                                                 | 75 V DC                                                                 | 75 V DC                                                                 |
| 200 mA                                                                  | 200 mA                                                                  | 200 mA                                                                  | 200 mA                                                                  | 200 mA                                                                  |
| ≤ 10 mA                                                                 | ≤ 10 mA                                                                 | ≤ 10 mA                                                                 | ≤ 10 mA                                                                 | ≤ 10 mA                                                                 |
| yes                                                                     | yes                                                                     | yes                                                                     | yes                                                                     | yes                                                                     |
| yes                                                                     | yes                                                                     | yes                                                                     | yes                                                                     | yes                                                                     |
| ≤ 5 %                                                                   | ≤ 5 %                                                                   | ≤ 5 %                                                                   | ≤ 5 %                                                                   | ≤ 5 %                                                                   |
| -25...+80 °C                                                            | -25...+80 °C                                                            | -25...+80 °C                                                            | -25...+90 °C                                                            | -25...+80 °C                                                            |
| 1000 Hz                                                                 | 1000 Hz                                                                 | 2000 Hz                                                                 | 2000 Hz                                                                 | 2000 Hz                                                                 |
| DC 13                                                                   | DC 13                                                                   | DC 13                                                                   | DC 13                                                                   | DC 13                                                                   |
| no                                                                      | no                                                                      | no                                                                      | no                                                                      | no                                                                      |
| IP 68 per BWN Pr. 20                                                    | IP 68 per BWN Pr. 20                                                    | IP 68 per BWN Pr. 20                                                    | IP 68 per BWN Pr. 20                                                    | IP 68 per BWN Pr. 20                                                    |
| Stainless steel<br>EP<br>Connector                                      | Stainless steel<br>EP<br>Connector                                      | Stainless steel<br>EP<br>Connector                                      | Stainless steel<br>EP<br>Connector                                      | Stainless steel<br>EP<br>Connector                                      |
| BKS-S 19-1/BKS-S 20-1<br>5.85×2.4/636594<br>10×5.9×1/705918             | BKS-S 19-1/BKS-S 20-1<br>5.85×2.4/636594<br>10×5.9×1/705918             | BKS-S 19-1/BKS-S 20-1<br>5.3×2.4/631753<br>10×5.9×1/705918              | BKS-S 19-1/BKS-S 20-1<br>5.3×2.4/631753<br>10×5.9×1/705918              | BKS-S 19-1/BKS-S 20-1<br>12.42×1.78/642828<br>15×12.2×0.7/642827        |
| 350 bar                                                                 | 500 bar                                                                 | 500 bar                                                                 | 500 bar                                                                 | 500 bar                                                                 |
| DIN EN 60079-0: 2004<br>DIN EN 60079-15: 2003<br>Ex II 3G Ex nA II T4 X | DIN EN 60079-0: 2004<br>DIN EN 60079-15: 2003<br>Ex II 3G Ex nA II T4 X | DIN EN 60079-0: 2004<br>DIN EN 60079-15: 2003<br>Ex II 3G Ex nA II T4 X | DIN EN 60079-0: 2004<br>DIN EN 60079-15: 2003<br>Ex II 3G Ex nA II T4 X | DIN EN 60079-0: 2004<br>DIN EN 60079-15: 2003<br>Ex II 3G Ex nA II T4 X |



# 1.5

Factor 1  
Weld immune  
Magnetic field immune  
Diagnostic  
Steelface  
Pressure rated  
**Pressure rated Ex**  
Namur Ex  
Temperature rated  
PROXINOX®  
Ring Sensors  
Extended switching distance

# 5

Connectors, Holders ...  
Page 5.2 ...


## Inductive Sensors

DC 2-wire  
M12  
s<sub>n</sub> 1.5 mm





# high pressure rated

**Ignition protection type "Intrinsically Safe"**



| Housing size                              | M12x1      | M12x1      |
|-------------------------------------------|------------|------------|
| Mounting (see notes starting p. 1.0.11)   | flush      | flush      |
| Rated operating distance s <sub>n</sub>   | 1.5 mm     | 1.5 mm     |
| Assured operating distance s <sub>a</sub> | 0...1.2 mm | 0...1.2 mm |

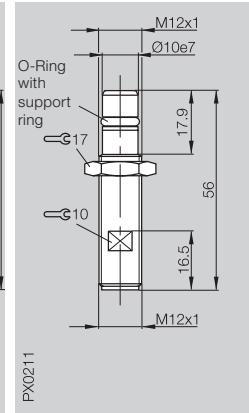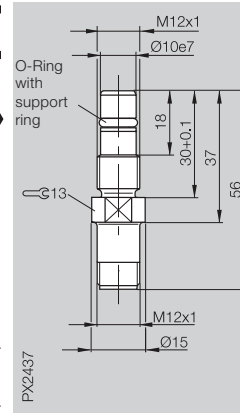

**Ignition protection type „intrinsically safe“ used with switching amplifier outside the hazardous area**

Inductive sensors to NAMUR specification consist essentially of an oscillator with a dampable oscillator coil and a demodulator.

These high pressure sensors are used, for example, in end-of-travel monitoring on hydraulic cylinders or position detection on valves.



They can be used in conjunction with suitable switching amplifiers such as from Steel (see next page) in explosive systems or Zone 1 and Zone 2 areas. The switch amplifier must be installed outside the explosive area.

### Note!

Before design, installation and startup, please read the operating manual found at [www.balluff.com](http://www.balluff.com). You must also observe the requirements for the EC Type Examination Certificate of the PTB.


| NAMUR                                                       | BES 516-300-S318-S4-N                                      | BES 516-300-S315-S4-N                                      |
|-------------------------------------------------------------|------------------------------------------------------------|------------------------------------------------------------|
| Rated operational voltage U <sub>e</sub>                    | 8.2 V DC                                                   | 8.2 V DC                                                   |
| Supply voltage U <sub>s</sub>                               | 7.7...9 V DC                                               | 7.7...9 V DC                                               |
| Rated insulation voltage U <sub>i</sub>                     | 75 V DC                                                    | 75 V DC                                                    |
| Current draw at<br>s <sub>r</sub> = 0<br>s <sub>r</sub> = ∞ | ≤ 1 mA<br>≥ 4 mA                                           | ≤ 1 mA<br>≥ 4 mA                                           |
| Rated series resistance R <sub>v</sub>                      | 1000 Ω                                                     | 1000 Ω                                                     |
| Permissible series resistance R <sub>v</sub>                | 550...1100 Ω                                               | 550...1100 Ω                                               |
| Output signal:                                              | Current change (no trigger response)                       | Current change (no trigger response)                       |
| Fully undamped                                              | ≥ 4 mA                                                     | ≥ 4 mA                                                     |
| Fully damped                                                | ≤ 1 mA                                                     | ≤ 1 mA                                                     |
| Polarity reversal protected < 9 V                           | yes                                                        | yes                                                        |
| Repeat accuracy R                                           | ≤ 5 %                                                      | ≤ 5 %                                                      |
| Ambient temperature range T <sub>a</sub>                    | -25...+70 °C                                               | -25...+70 °C                                               |
| Switching frequency f                                       | 1000 Hz                                                    | 1000 Hz                                                    |
| Function indicator                                          | no                                                         | no                                                         |
| Degree of protection per IEC 60529                          | IP 68 per BWN Pr. 20                                       | IP 68 per BWN Pr. 20                                       |
| Housing material                                            | Stainless steel                                            | Stainless steel                                            |
| Material of sensing face                                    | POM                                                        | POM                                                        |
| Connection                                                  | Connector                                                  | Connector                                                  |
| Recommended connector                                       | BKS-S 10-3/BKS-S 8-3/<br>BKS-S220-12-PB/<br>BKS-S221-12-PB | BKS-S 10-3/BKS-S 8-3/<br>BKS-S220-12-PB/<br>BKS-S221-12-PB |
| O-Ring/spare part number                                    | 5.85x2.4/636594                                            | 5.85x2.4/636594                                            |
| Support ring/spare part number                              | 10x5.9x1/705918                                            | 10x5.9x1/705918                                            |
| Pressure rated (hydraulic) up to                            | <b>500 bar</b>                                             | <b>500 bar</b>                                             |
| Ex-Zone                                                     |                                                            |                                                            |
| Conformity                                                  | EN 60079-0:2004<br>EN 50020:2002                           | EN 60079-0:2004<br>EN 50020:2002                           |
| EC Type Examination Certificate Designation                 | PTB 01 ATEX 2207 X<br>Ex II 2 G Ex ia IIC T6               | PTB 01 ATEX 2207 X<br>Ex II 2 G EEx ia IIC T6              |
| Effective internal capacitance                              | ≤ 30 nF                                                    | ≤ 30 nF                                                    |
| Effective internal inductance                               | 0.5 mH                                                     | 0.5 mH                                                     |
| Maximum input power P <sub>i</sub>                          | 200 mW                                                     | 200 mW                                                     |

For additional data see EC Type Examination Certificate.





Housing size **99×17.6×114.5 mm**

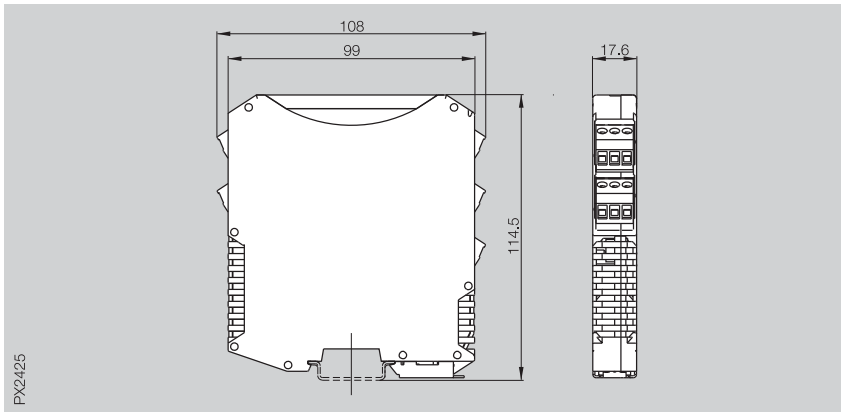

|                                 |                                                                                                                       |                      |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------|----------------------|
| Ordering code                   | STAHL 9170/20-12-11S                                                                                                  | STAHL 9170/20-12-21S |
| Input                           | NAMUR specification                                                                                                   |                      |
| Output relay                    | 2-channel, 1 change-over<br>Switching voltage 250 V AC<br>Switching current 4 A AC<br>Switching capacity 50 W/1000 VA |                      |
| Function change                 | via switch                                                                                                            |                      |
| Supply voltage $U_B$            | 24 V DC                                                                                                               | 120...230 V AC       |
| Ambient temperature range $T_a$ | -20...+60 °C                                                                                                          |                      |
| relative humidity               | ≤ 95 %, non-condensing                                                                                                |                      |
| Ex-Zone                         |                                                                                                                       |                      |
| Designation                     | Ex II (1) GD [EEx ia] IIC/IIB and Ex II 3 G EEx nAC II T4                                                             |                      |
| EC Type Examination Certificate | DMT 02 ATEX E 195 X                                                                                                   |                      |

# 1.5

Factor 1  
Weld immune  
Magnetic field immune  
Diagnostic  
Steelface  
Pressure rated  
**Pressure rated Ex**  
**Namur Ex**  
Temperature rated  
PROXINOX®  
Ring  
Sensors  
Extended switching distance

For safety and other data see EC Type Examination Certificate.

The switching amplifier with relay output serves as the interface between electrical signals from the hazardous area (Ex zone) and the non-hazardous area (safe zone).


The input signals from NAMUR sensors are converted using relay switching contacts on the outputs. Input, output and auxiliary power circuits are galvanically isolated.

## Note!

Before design, installation and startup, please read the operating manual found at [www.stahl.de](http://www.stahl.de).

You must also observe the requirements for the EC Type Examination Certificate.

## Wiring diagrams

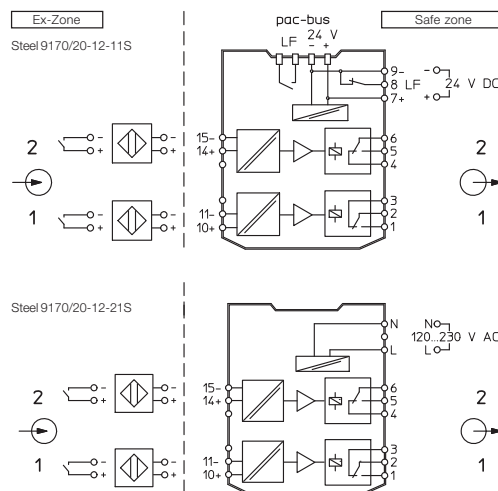

# 5



Connectors, Holders ...  
Page 5.2 ...

## Inductive Sensors

DC 2-wire  
 $\varnothing$  6.5 mm, M8  
 $s_n$  1 mm



Ignition protection type  
 "Intrinsically Safe"

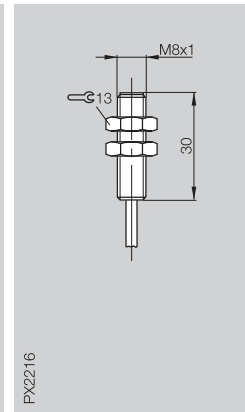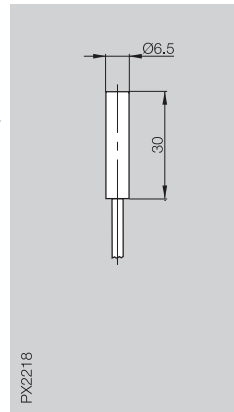

### Ignition protection type „intrinsically safe“ used with switching amplifier outside the hazardous area

Inductive sensors to NAMUR specification consist essentially of an oscillator with a dampable oscillator coil and a demodulator.

These sensors can be used in conjunction with suitable switching amplifiers such as from Steel (see page 1.5.39) in explosive systems or zones (see ATEX marking). The switching amplifier must be installed only outside the explosive area.

### Note!

Before design, installation and startup, please read the operating manual found at [www.balluff.com](http://www.balluff.com). You must also observe the requirements for the EC Type Examination Certificate of the BVS and PTB.


|                                                                           |                                                    |                                                    |
|---------------------------------------------------------------------------|----------------------------------------------------|----------------------------------------------------|
| Housing size                                                              | $\varnothing$ 6.5 mm                               | M8x1                                               |
| Mounting                                                                  | flush                                              | flush                                              |
| Mounting (see notes starting p. 1.0.11)                                   | 1 mm                                               | 1 mm                                               |
| Assured operating distance $s_a$                                          | 0.8 mm                                             | 0...0.8 mm                                         |
| NAMUR                                                                     | BES G06MD-GNX10B-EV02-EEX                          | BES M08MD-GNX10B-EV02-EEX                          |
| Rated operational voltage $U_o$                                           | 8.2 V DC                                           | 8.2 V DC                                           |
| Supply voltage $U_B$                                                      | 7.7...9 V DC                                       | 7.7...9 V DC                                       |
| Rated insulation voltage $U_i$                                            | 75 V DC                                            | 75 V DC                                            |
| Current draw:                                                             | Current change (no trigger response)               | Current change (no trigger response)               |
| Open (undamped)                                                           | $\leq 1$ mA                                        | $\leq 1$ mA                                        |
| Conducting (damped)                                                       | $\geq 2.1$ mA                                      | $\geq 2.1$ mA                                      |
| Rated series resistance $R_v$                                             | 1000 $\Omega$                                      | 1000 $\Omega$                                      |
| Polarity reversal protected                                               | no*                                                | no*                                                |
| Ambient temperature range $T_a$                                           | -20...+70 °C                                       | -20...+70 °C                                       |
| Switching frequency $f$                                                   | 2000 Hz                                            | 2000 Hz                                            |
| Function indicator                                                        | no                                                 | no                                                 |
| Degree of protection per IEC 60529                                        | IP 67                                              | IP 67                                              |
| Housing material                                                          | CuZn coated                                        | CuZn coated                                        |
| Material of sensing face                                                  | PBT                                                | PBT                                                |
| Connection                                                                | 2 m PVC cable                                      | 2 m PVC cable                                      |
| No. of wires x cross-section                                              | 2x0.14 mm <sup>2</sup>                             | 2x0.14 mm <sup>2</sup>                             |
| Recommended connector                                                     |                                                    |                                                    |
| Ex-Zone                                                                   |                                                    |                                                    |
| Conformity                                                                | EN 50014:1997+A1+A2<br>EN 50020                    | EN 50014:1997+A1+A2<br>EN 50020                    |
| EC Type Examination Certificate                                           | BVS 05 ATEX E 163<br>PTB 05 ATEX 2075              | BVS 05 ATEX E 163<br>PTB 05 ATEX 2075              |
| Designation                                                               | Ex II 2G EEx ia IIC T6<br>Ex II 1D Ex iaD 20 T90°C | Ex II 2G EEx ia IIC T6<br>Ex II 1D Ex iaD 20 T90°C |
| Maximum internal capacitance                                              | $\leq 80$ nF                                       | $\leq 80$ nF                                       |
| Maximum internal inductance                                               | 0.07 mH                                            | 0.07 mH                                            |
| Connected to approved intrinsically safe circuits with the highest values | U = 15 V<br>I = 50 mA<br>P = 120 mW                | U = 15 V<br>I = 50 mA<br>P = 120 mW                |

\*Power restriction when using an approved intrinsically safe switching amplifier


Switching distance ■■ see page 1.0.10

### Wiring diagrams


BES G06.../M08...



BES M12.../M18.../M30...



Unicomact



- 1 Connected to NAMUR switching amplifier
- 2 Connected to NAMUR switching amplifier
- 5 Connector body potential compensation



DC 2-wire, M12, M18,  
M30, Block style housings  
s<sub>n</sub> 4, 8, 15, 20, 35 mm






Connectors,  
Holders ...  
Page 5.2 ...

## 1.5.41

# Inductive Sensors

DC 3-wire  
M5, M8, M12  
s<sub>n</sub> 0.5 mm, 1 mm, 2 mm

|                                           |               |             |             |              |
|-------------------------------------------|---------------|-------------|-------------|--------------|
| Housing size                              | <b>M5x0.5</b> | <b>M8x1</b> | <b>M8x1</b> | <b>M12x1</b> |
| Mounting (see notes starting p. 1.0.11)   | flush         | flush       | flush       | flush        |
| Rated operating distance s <sub>n</sub>   | <b>0.5 mm</b> | <b>1 mm</b> | <b>2 mm</b> | <b>2 mm</b>  |
| Assured operating distance s <sub>a</sub> | 0...0.4 mm    | 0...0.8 mm  | 0...1.6 mm  | 0...1.6 mm   |

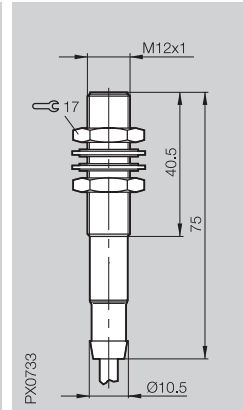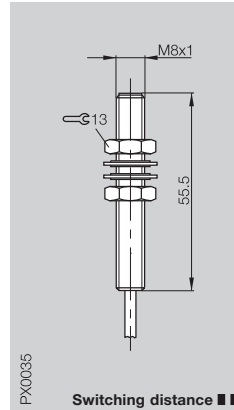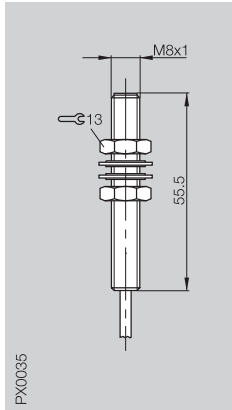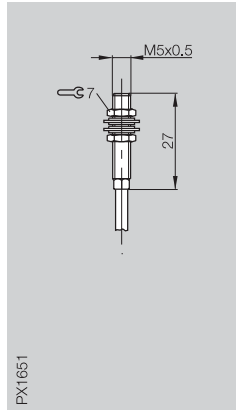


|                                               |                         |                           |                            |                                           |                          |
|-----------------------------------------------|-------------------------|---------------------------|----------------------------|-------------------------------------------|--------------------------|
| PNP                                           | NO ①<br>complementary ③ | BES M05ED-PSD05B-ES02-T01 | BES 516-324-SA8-02         | BES 516-324-SA26-02                       | BES 516-325-SA19-03      |
| NPN                                           | NO ④<br>complementary ⑥ |                           |                            |                                           | BES 516-329-SA14-A0-X-03 |
| Supply voltage U <sub>B</sub>                 | 10...30 V DC            | 10...30 V DC              | 10...30 V DC               | 10...30 V DC                              | 10...30 V DC             |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> | ≤ 1 V                   | ≤ 1.5 V                   | ≤ 1.5 V                    | ≤ 1.5 V                                   | PNP ≤ 1.8 V, NPN ≤ 1.5 V |
| Rated insulation voltage U <sub>i</sub>       | 75 V DC                 | 75 V DC                   | 75 V DC                    | 75 V DC                                   | 75 V DC                  |
| Rated operational current I <sub>e</sub>      | ≤ 150 mA (see Fig. 1)   | ≤ 200 mA (see Fig. 2)     | ≤ 200 mA (see Fig. 3)      | ≤ 200 mA (see Fig. 3)                     | ≤ 200 mA (see Fig. 3)    |
| No-load supply current I <sub>0</sub> max.    | ≤ 10 mA                 | ≤ 20 mA                   | ≤ 20 mA                    | ≤ 20 mA                                   | ≤ 25 mA                  |
| Polarity reversal protected                   | yes                     | yes                       | yes                        | yes                                       | yes                      |
| Short circuit protected                       | yes                     | no                        | no                         | no                                        | no                       |
| Repeat accuracy R                             | ≤ 5 %                   | ≤ 5 %                     | ≤ 5 %                      | ≤ 5 %                                     | ≤ 5 %                    |
| Ambient temperature range T <sub>a</sub>      | <b>-25...+120 °C</b>    | <b>-25...+100 °C</b>      | <b>-25...+120 °C</b>       | <b>-25...+120 °C</b>                      | <b>-25...+120 °C</b>     |
| Switching frequency f                         | 1000 Hz                 | 2000 Hz                   | 1500 Hz                    | 1000 Hz                                   | 1000 Hz                  |
| Utilization category                          | DC 13                   | DC 13                     | DC 13                      | DC 13                                     | DC 13                    |
| Function indicator                            | no                      | no                        | no                         | no                                        | no                       |
| Degree of protection per IEC 60529            | IP 67                   | IP 67                     | IP 67,<br>IP 60 cable exit | IP 68 per BWN Pr. 20,<br>IP 60 cable exit |                          |
| Housing material                              | Stainless steel         | Stainless steel           | Stainless steel            | CuZn coated                               |                          |
| Material of sensing face                      | PA 6                    | PBT                       | PBT                        | PEEK                                      |                          |
| Connection                                    | 2 m silicon cable       | 2 m PVC/105 °C cable      | 2 m Teflon cable           | 3 m silicon cable                         |                          |
| No. of wires × cross-section                  | 3×0.15 mm <sup>2</sup>  | 3×0.14 mm <sup>2</sup>    | 3×0.14 mm <sup>2</sup>     | 3×0.5 mm <sup>2</sup>                     |                          |
| Recommended connector                         |                         |                           |                            |                                           |                          |
| Pressure rated to                             |                         |                           |                            | <b>3 bar</b>                              |                          |

① Wiring diagrams see page 1.0.6  
Exception: BES 516-325-SA19- and  
BES 516-329-SA14-A0-X- see above

Switching distance ■ ■ see page 1.0.10

Other cable lengths on request.

## Current reduction as a function of ambient temperature range

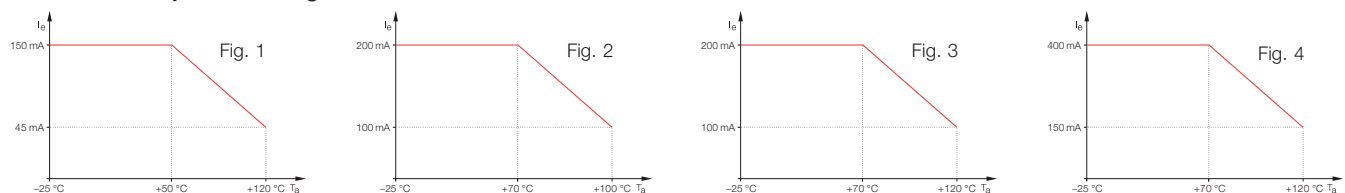

| M18x1<br>flush<br>5 mm<br>0...4.1 mm                                                | M18x1<br>flush<br>5 mm<br>0...4.1 mm                                                | M30x1.5<br>flush<br>10 mm<br>0...8.1 mm                                                      | M30x1.5<br>non-flush<br>15 mm<br>0...12.2 mm                                        | 25x50x10 mm<br>flush<br>5 mm<br>0...4.1 mm                              |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------|
|                                                                                     |                                                                                     |                                                                                              |                                                                                     |                                                                         |
| BES 516-105-SA5                                                                     | BES 516-105-SA2-05                                                                  | BES 516-114-SA1-05                                                                           | BES 516-125-SA1-05                                                                  | BES 516-347-SA2-03                                                      |
|                                                                                     |                                                                                     | BES 516-120-SA2                                                                              |                                                                                     |                                                                         |
| 10...30 V DC<br>≤ 1.5 V<br>75 V DC<br>≤ 400 mA (see Fig. 4)<br>≤ 20 mA<br>yes<br>no | 10...30 V DC<br>≤ 1.5 V<br>75 V DC<br>≤ 400 mA (see Fig. 4)<br>≤ 20 mA<br>yes<br>no | 10...30 V DC<br>≤ 1.5 V<br>75 V DC<br>≤ 400 mA (see Fig. 4)<br>≤ 15 mA<br>yes<br>no          | 10...30 V DC<br>≤ 1.5 V<br>75 V DC<br>≤ 400 mA (see Fig. 4)<br>≤ 15 mA<br>yes<br>no | 24 V DC ±10 %<br>≤ 2.5 V<br>75 V DC<br>≤ 25 mA<br>≤ 25 mA<br>yes<br>yes |
| ≤ 5 %<br><b>-25...+120 °C</b><br>500 Hz<br>DC 13<br>no                              | ≤ 5 %<br><b>-25...+120 °C</b><br>500 Hz<br>DC 13<br>no                              | ≤ 5 %<br><b>-25...+120 °C</b><br>300 Hz<br>DC 13<br>no                                       | ≤ 5 %<br><b>-25...+120 °C</b><br>100 Hz<br>DC 13<br>no                              | ≤ 5 %<br><b>-25...+100 °C</b><br>500 Hz<br>DC 13<br>no                  |
| IP 67                                                                               | IP 67,<br>IP 60 cable exit                                                          | IP 67,<br>IP 60 cable exit                                                                   | IP 67,<br>IP 60 cable exit                                                          | IP 65,<br>IP 60 cable exit                                              |
| CuZn coated<br>PBT<br>Connector                                                     | CuZn coated<br>PBT<br>5 m silicon cable                                             | CuZn coated<br>PBT<br>Silicon cable<br>5 m for BES 516-114-SA1-05<br>9 m for BES 516-120-SA2 | CuZn coated<br>PA 12<br>5 m silicon cable                                           | GD-Al<br>PBT<br>3 m silicon cable                                       |
|                                                                                     | 4x0.75 mm <sup>2</sup>                                                              | 4x0.75 mm <sup>2</sup>                                                                       | 4x0.75 mm <sup>2</sup>                                                              | 3x0.75 mm <sup>2</sup>                                                  |
| BKS-S 23-3/BKS-S 24-3/BKS-S144                                                      |                                                                                     |                                                                                              |                                                                                     |                                                                         |

### Temperature rated sensors to +120 °C

More and more industrial processes are running at higher temperatures. This increases the demands on the sensor. With high temperature rated sensors from Balluff you are on the safe side even under high temperatures.

### Applications

- Television picture tube and display manufacturing
- Motor function monitoring
- Glass manufacturing



# 1.5

Factor 1  
Weld immune  
Magnetic field immune  
Diagnostic  
Steelface  
Pressure rated  
Pressure rated Ex  
Namur Ex  
**Temperature rated**  
PROXINOX®  
Ring Sensors  
Extended switching distance

# 5

Connectors, Holders ...  
Page 5.2 ...




## Inductive Sensors

DC 3-wire  
M12  
s<sub>n</sub> 2 mm, 4 mm

|                                           |              |              |              |
|-------------------------------------------|--------------|--------------|--------------|
| Housing size                              | <b>M12x1</b> | <b>M12x1</b> | <b>M12x1</b> |
| Mounting (see notes starting p. 1.0.11)   | flush        | flush        | flush        |
| Rated operating distance s <sub>n</sub>   | <b>2 mm</b>  | <b>2 mm</b>  | <b>4 mm</b>  |
| Assured operating distance s <sub>a</sub> | 0...1.6 mm   | 0...1.6 mm   | 0...3.2 mm   |

CE

stainless steel

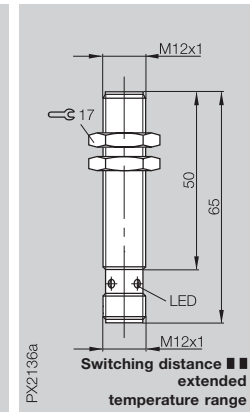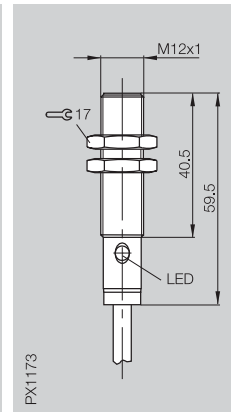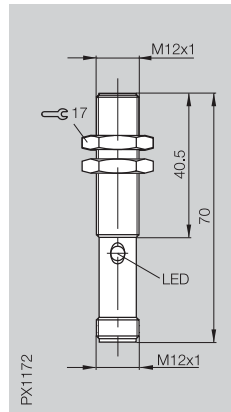

|                                               |    |   |                      |                        |                       |  |
|-----------------------------------------------|----|---|----------------------|------------------------|-----------------------|--|
| PNP                                           | NO | ① | BES 515-325-S4-C     | BES 515-325-B0-C-PU-03 | BES M12EI-PSC40B-S04G |  |
|                                               | NC | ② |                      |                        | BES M12EI-POC40B-S04G |  |
|                                               |    |   |                      |                        |                       |  |
| NPN                                           | NO | ④ |                      |                        | BES M12EI-NSC40B-S04G |  |
|                                               |    |   |                      |                        |                       |  |
| Supply voltage U <sub>B</sub>                 |    |   | 10...30 V DC         | 10...30 V DC           | 10...30 V DC          |  |
| Voltage drop U <sub>d</sub> at I <sub>e</sub> |    |   | ≤ 1.5 V              | ≤ 1.5 V                | ≤ 2.5 V               |  |
| Rated insulation voltage U <sub>i</sub>       |    |   | 250 V AC             | 250 V AC               | 250 V AC              |  |
| Rated operational current I <sub>e</sub>      |    |   | 200 mA               | 200 mA                 | 200 mA                |  |
| No-load supply current I <sub>0</sub> max.    |    |   | ≤ 8 mA               | ≤ 8 mA                 | ≤ 14 mA               |  |
| Polarity reversal protected                   |    |   | yes                  | yes                    | yes                   |  |
| Short circuit protected                       |    |   | yes                  | yes                    | yes                   |  |
|                                               |    |   |                      |                        |                       |  |
| Repeat accuracy R                             |    |   | ≤ 5 %                | ≤ 5 %                  | ≤ 5 %                 |  |
| Ambient temperature range T <sub>a</sub>      |    |   | -25...+70 °C         | -25...+70 °C           | -25...+85 °C          |  |
| Switching frequency f                         |    |   | ≤ 3000 Hz            | ≤ 3000 Hz              | ≤ 1000 Hz             |  |
| Utilization category                          |    |   | DC 13                | DC 13                  | DC 13                 |  |
| Function indicator                            |    |   | yes                  | yes                    | yes                   |  |
|                                               |    |   |                      |                        |                       |  |
| Degree of protection per IEC 60529            |    |   | IP 68 per BWN Pr. 20 | IP 68 per BWN Pr. 20   | IP 68 per BWN Pr. 20  |  |
| Insulation class                              |    |   | □                    | □                      | □                     |  |
| Housing material                              |    |   | Stainless steel      | Stainless steel        | Stainless steel       |  |
| Material of sensing face                      |    |   | PA 12                | PA 12                  | LCP                   |  |
| Connection                                    |    |   | Connector            | 3 m PUR cable          | Connector             |  |
| No. of wires × cross-section                  |    |   |                      | 3×0.34 mm <sup>2</sup> |                       |  |
| Approval                                      |    |   | cULus                | cULus                  | cULus                 |  |
| Recommended connector                         |    |   | BKS-S 20E            |                        | BKS-S 20E             |  |

① Wiring diagrams see page 1.0.6  
Switching distance ■ ■ see page 1.0.10






Other cable lengths on request.

### A tough player – Stainless steel housing stops aggressive media in its tracks.

Inductive proximity switches are being increasingly used in aggressive environments.

This applies especially to the working zone of machine tools or in the chemical industry, on packaging machines and in the food industry. The main elements at work are aggressive cleaning agents combined with high-pressure cleaning equipment.

**The solution = PROXINOX®**

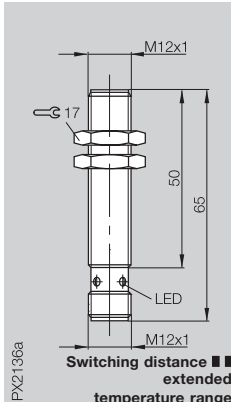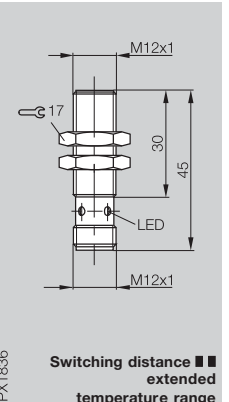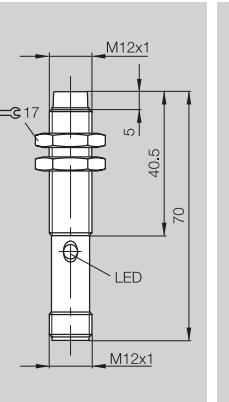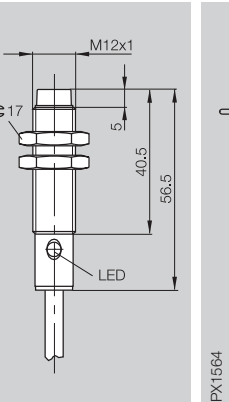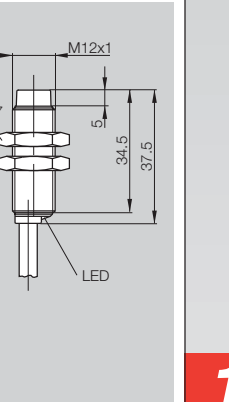
|                                                                                   | M12x1<br>flush<br>4 mm<br>0...3.2 mm                                              | M12x1<br>flush<br>4 mm<br>0...3.2 mm                                              | M12x1<br>non-flush<br>4 mm<br>0...3.2 mm                                           | M12x1<br>non-flush<br>4 mm<br>0...3.2 mm                                                             | M12x1<br>non-flush<br>4 mm<br>0...3.2 mm                                                           |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
|  |  |  |  |                   |                                                                                                    |
|                                                                                   | BES M12E-PSC40B-S04G-009                                                          | BES M12EE-PSC40B-S04G<br>BES M12EE-POC40B-S04G                                    | BES 515-356-S4-C                                                                   | BES 515-356-B0-C-03                                                                                  | BES 515-356-E4-C-03                                                                                |
|                                                                                   | 10...30 V DC<br>≤ 2.5 V<br>250 V AC<br>200 mA<br>≤ 10 mA<br>yes<br>yes            | 10...30 V DC<br>≤ 2 V<br>250 V AC<br>200 mA<br>≤ 10 mA<br>yes<br>yes              | 10...30 V DC<br>≤ 1.5 V<br>250 V AC<br>200 mA<br>≤ 8 mA<br>yes<br>yes              | 10...30 V DC<br>≤ 1.5 V<br>250 V AC<br>200 mA<br>≤ 8 mA<br>yes<br>yes                                | 10...30 V DC<br>≤ 2 V<br>250 V AC<br>200 mA<br>≤ 10 mA<br>yes<br>yes                               |
|                                                                                   | ≤ 5 %<br>-40...+85 °C<br>≤ 2000 Hz<br>DC 13<br>yes                                | ≤ 5 %<br>-25...+85 °C<br>≤ 2000 Hz<br>DC 13<br>yes                                | ≤ 5 %<br>-25...+70 °C<br>≤ 1500 Hz<br>DC 13<br>yes                                 | ≤ 5 %<br>-25...+70 °C<br>≤ 1500 Hz<br>DC 13<br>yes                                                   | ≤ 5 %<br>-25...+70 °C<br>≤ 2000 Hz<br>DC 13<br>yes                                                 |
|                                                                                   | IP 67<br>Stainless steel<br>LCP<br>Connector                                      | IP 68 per BWN Pr. 20<br>Stainless steel<br>LCP<br>Connector                       | IP 68 per BWN Pr. 20<br>Stainless steel<br>PA 12<br>Connector                      | IP 68 per BWN Pr. 20<br>Stainless steel<br>PA 12<br>3 m PVC cable<br>3x0.34 mm <sup>2</sup><br>cULus | IP 68 per BWN Pr. 20<br>Stainless steel<br>PBT<br>3 m PVC cable<br>3x0.34 mm <sup>2</sup><br>cULus |
|                                                                                   | cULus<br>BKS-S 20E                                                                | cULus<br>BKS-S 20E                                                                | cULus<br>BKS-S 20E                                                                 |                                                                                                      |                                                                                                    |

1.5

Factor 1  
Weld immune  
Magnetic  
field immune  
Diagnostic  
Steelface  
Pressure  
rated  
Pressure  
rated Ex  
Namur Ex  
Temperature  
rated  
**PROXINOX®**  
Ring  
Sensors  
Extended  
switching  
distance

5

Connectors,  
Holders ...  
Page 5.2 ...



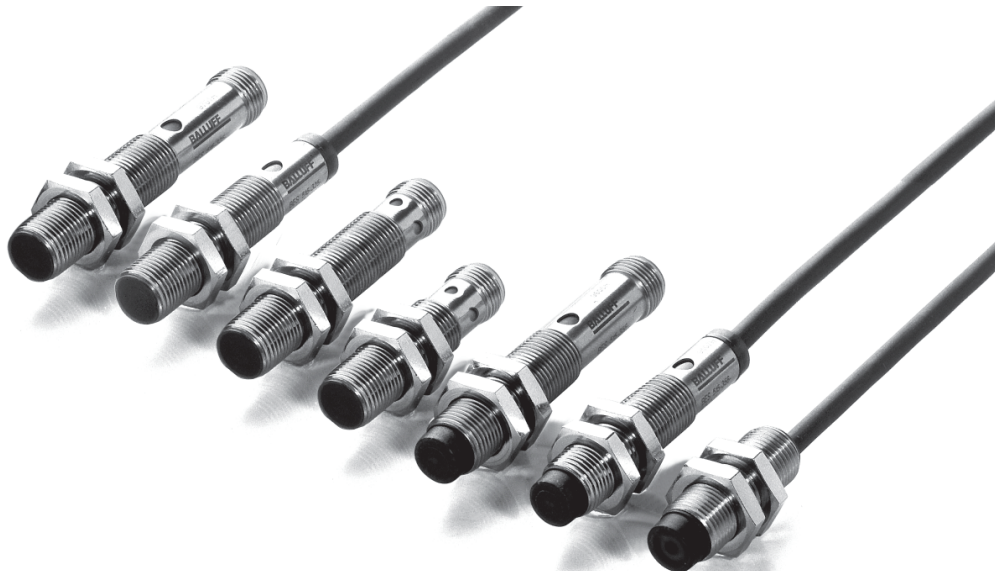




|                                           |              |              |              |
|-------------------------------------------|--------------|--------------|--------------|
| Housing size                              | <b>M18x1</b> | <b>M18x1</b> | <b>M18x1</b> |
| Mounting (see notes starting p. 1.0.11)   | flush        | flush        | flush        |
| Rated operating distance s <sub>n</sub>   | <b>5 mm</b>  | <b>5 mm</b>  | <b>8 mm</b>  |
| Assured operating distance s <sub>a</sub> | 0...4.1 mm   | 0...4.1 mm   | 0...6.5 mm   |



stainless  
steel

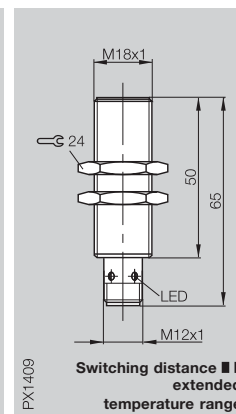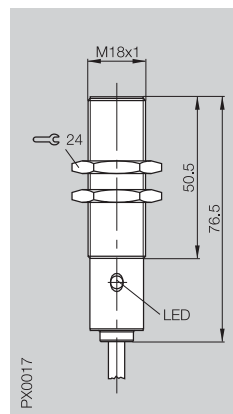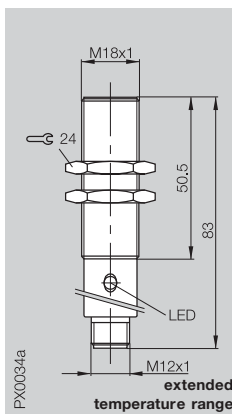


|                                               |                      |                        |                        |                       |
|-----------------------------------------------|----------------------|------------------------|------------------------|-----------------------|
| PNP                                           | NO ①                 | BES 515-326-S4-C       | BES 515-326-B0-C-PU-03 | BES M18EI-PSC80B-S04G |
|                                               | NC ②                 |                        |                        | BES M18EI-POC80B-S04G |
|                                               | complementary ③      |                        |                        |                       |
| Supply voltage U <sub>B</sub>                 | 10...30 V DC         | 10...30 V DC           | 10...30 V DC           |                       |
| Voltage drop U <sub>A</sub> at I <sub>e</sub> | ≤ 1.5 V              | ≤ 1.5 V                | ≤ 2.5 V                |                       |
| Rated insulation voltage U <sub>i</sub>       | 250 V AC             | 250 V AC               | 250 V AC               |                       |
| Rated operational current I <sub>e</sub>      | 200 mA               | 200 mA                 | 200 mA                 |                       |
| No-load supply current I <sub>0</sub> max.    | ≤ 12 mA              | ≤ 12 mA                | ≤ 10 mA                |                       |
| Polarity reversal protected                   | yes                  | yes                    | yes                    |                       |
| Short circuit protected                       | yes                  | yes                    | yes                    |                       |
| Repeat accuracy R                             | ≤ 5 %                | ≤ 5 %                  | ≤ 5 %                  |                       |
| Ambient temperature range T <sub>a</sub>      | -40...+85 °C         | -25...+70 °C           | -40...+85 °C           |                       |
| Switching frequency f                         | 900 Hz               | 900 Hz                 | 700 Hz                 |                       |
| Utilization category                          | DC 13                | DC 13                  | DC 13                  |                       |
| Function indicator                            | yes                  | yes                    | yes                    |                       |
| Degree of protection per IEC 60529            | IP 68 per BWN Pr. 20 | IP 68 per BWN Pr. 20   | IP 68 per BWN Pr. 20   |                       |
| Insulation class                              | □                    | □                      | □                      |                       |
| Housing material                              | Stainless steel      | Stainless steel        | Stainless steel        |                       |
| Material of sensing face                      | PA 12                | PA 12                  | PBT                    |                       |
| Connection                                    | Connector            | 3 m Cable PUR          | Connector              |                       |
| No. of wires × cross-section                  |                      | 3×0.34 mm <sup>2</sup> |                        |                       |
| Approval                                      | cULus                | cULus                  | cULus                  |                       |
| Recommended connector                         | BKS-S 20E            |                        | BKS-S 20E              |                       |

① Wiring diagrams see page 1.0.6  
Switching distance ■■ see page 1.0.10

Other cable lengths on request.

| M18x1      | M18x1      | M18x1      | M30x1.5    | M30x1.5     |
|------------|------------|------------|------------|-------------|
| non-flush  | non-flush  | non-flush  | flush      | non-flush   |
| 8 mm       | 8 mm       | 8 mm       | 10 mm      | 15 mm       |
| 0...6.5 mm | 0...6.5 mm | 0...6.5 mm | 0...8.1 mm | 0...12.2 mm |

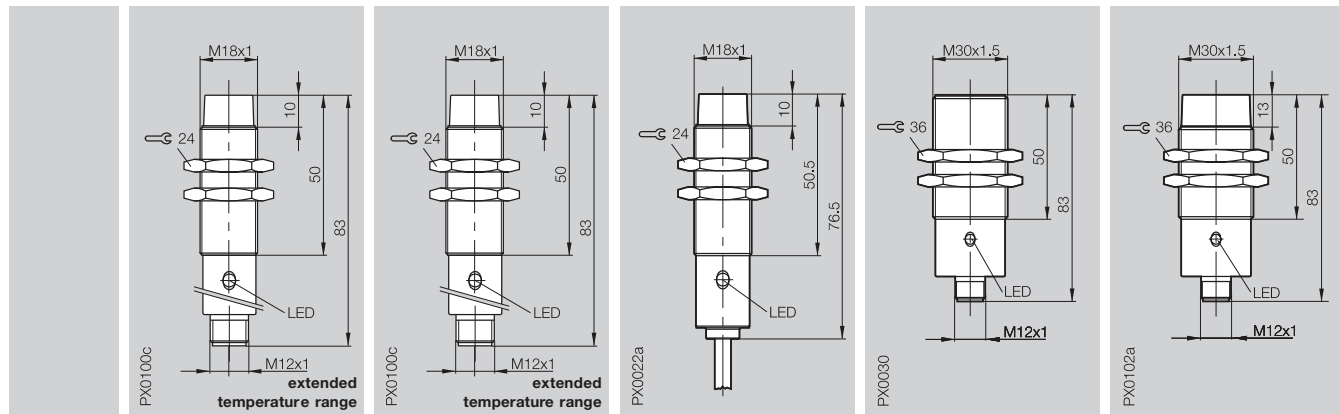

|                      |                      |                                         |                      |                      |
|----------------------|----------------------|-----------------------------------------|----------------------|----------------------|
| BES 515-360-S4-C     | BES 515-123-S4-C     | BES 515-360-B0-C-PU-03                  | BES 515-327-S4-C     | BES 515-362-S4-C     |
| 10...30 V DC         | 10...30 V DC         | 10...30 V DC                            | 10...30 V DC         | 10...30 V DC         |
| ≤ 1.5 V              | ≤ 2.5 V              | ≤ 1.5 V                                 | ≤ 2.5 V              | ≤ 2.5 V              |
| 250 V AC             | 250 V AC             | 250 V AC                                | 250 V AC             | 250 V AC             |
| 200 mA               | 200 mA               | 200 mA                                  | 200 mA               | 200 mA               |
| ≤ 12 mA              | ≤ 30 mA              | ≤ 12 mA                                 | ≤ 25 mA              | ≤ 25 mA              |
| yes                  | yes                  | yes                                     | yes                  | yes                  |
| yes                  | yes                  | yes                                     | yes                  | yes                  |
| ≤ 5 %                | ≤ 5 %                | ≤ 5 %                                   | ≤ 5 %                | ≤ 5 %                |
| -40...+85 °C         | -40...+85 °C         | -25...+70 °C                            | -25...+70 °C         | -25...+70 °C         |
| 600 Hz               | 200 Hz               | 600 Hz                                  | ≤ 300 Hz             | ≤ 100 Hz             |
| DC 13                | DC 13                | DC 13                                   | DC 13                | DC 13                |
| yes                  | yes                  | yes                                     | yes                  | yes                  |
| IP 68 per BWN Pr. 20 | IP 68 per BWN Pr. 20 | IP 68 per BWN Pr. 20                    | IP 68 per BWN Pr. 20 | IP 68 per BWN Pr. 20 |
| Stainless steel      | Stainless steel      | Stainless steel                         | Stainless steel      | Stainless steel      |
| PA 12                | PA 12                | PA 12                                   | PA 12                | PA 12                |
| Connector            | Connector            | 3 m Cable PUR<br>3x0.34 mm <sup>2</sup> | Connector            | Connector            |
| cULus                | cULus                | cULus                                   | cULus                | cULus                |
| BKS-S 20E            | BKS-S 20E            |                                         | BKS-S 20E            | BKS-S 20E            |

# 1.5

Factor 1  
Weld immune  
Magnetic field immune  
Diagnostic  
Steelface  
Pressure rated  
Pressure rated Ex  
Namur Ex  
Temperature rated  
**PROXINOX®**  
Ring  
Sensors  
Extended switching distance


# 5

Connectors, Holders ...  
Page 5.2 ...



**PROXINOX® Sensors –  
withstands the harshest  
cleaning processes**

In the food and beverage industry, the chemical industry, and even conveying operations, inductive proximity sensors are routinely cleaned with more and more aggressive agents. Whether it's acids, bases, steam, foam or high pressure cleaning equipment – the technology in the new PROXINOX®-stainless steel sensors is especially designed for these harsh conditions.

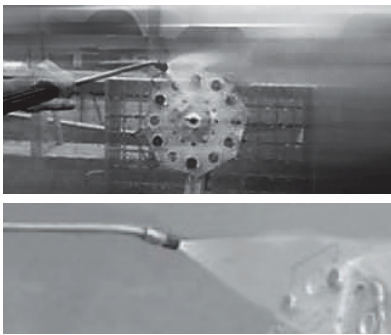

+ Steam blast  
tested

**Features**

- No function display directly on sensor: the hole for the LED is a potential source of danger when cleaning, as well as a possible entry for bacteria. The function display is completely wrapped in the transparent plastic of the connector.
- Housing of stainless steel (type 1.4571): type 1.4571 stainless steel is what the food and beverage industry demands. The connector plug must also be capable of withstanding cleaning and disinfecting agents.
- Gold contacts: harsh conditions demand gold plated contacts in order to avoid connector corrosion.
- Laser etched part number: cleaning agents and disinfectants can remove a label. Etched part numbers are there to stay.
- Additional O-ring seals: temperature shock, caused by cleaning and disinfection, lead to strongly different expansions of a steel housing and the internal epoxy.

|                                         |  |
|-----------------------------------------|--|
| Housing size                            |  |
| Mounting (see notes starting p. 1.0.11) |  |
| Rated operating distance $s_n$          |  |
| Assured operating distance $s_a$        |  |




stainless  
steel






| PNP                                                    | NO | ① |
|--------------------------------------------------------|----|---|
| Supply voltage $U_B$                                   |    |   |
| Voltage drop $U_d$ at $I_e$                            |    |   |
| Rated insulation voltage $U_i$                         |    |   |
| Rated operational current $I_e$                        |    |   |
| No-load supply current $I_0$ max.                      |    |   |
| Polarity reversal protected                            |    |   |
| Short circuit protected                                |    |   |
| Repeat accuracy R                                      |    |   |
| Ambient temperature range $T_a$                        |    |   |
| Ambient temperature $T_a$ at load current $\leq 20$ mA |    |   |
| Ambient temperature range $T_a$ short-time 30 min      |    |   |
| Switching frequency f                                  |    |   |
| Utilization category                                   |    |   |
| Function indicator                                     |    |   |
| Degree of protection per IEC 60529                     |    |   |
| Housing material                                       |    |   |
| Material of sensing face                               |    |   |
| Connection                                             |    |   |
| Approval                                               |    |   |
| Recommended connector                                  |    |   |

① Wiring diagrams see page 1.0.6

**Current reduction as a function  
of ambient temperature range**



| M12x1<br>flush | M12x1<br>non-flush | M18x1<br>flush | M18x1<br>non-flush | M30x1.5<br>flush |
|----------------|--------------------|----------------|--------------------|------------------|
| <b>2 mm</b>    | <b>4 mm</b>        | <b>5 mm</b>    | <b>8 mm</b>        | <b>10 mm</b>     |
| 0...1.6 mm     | 0...3.2 mm         | 0...4.1 mm     | 0...6.5 mm         | 0...8.1 mm       |

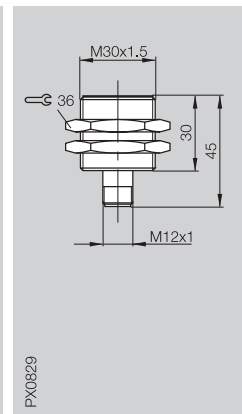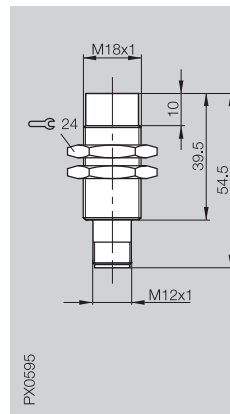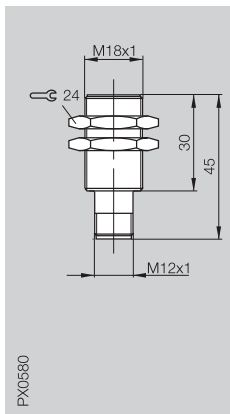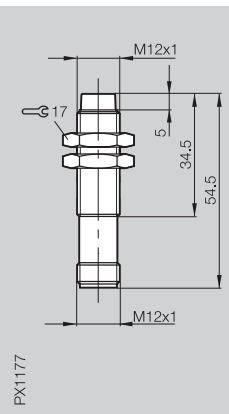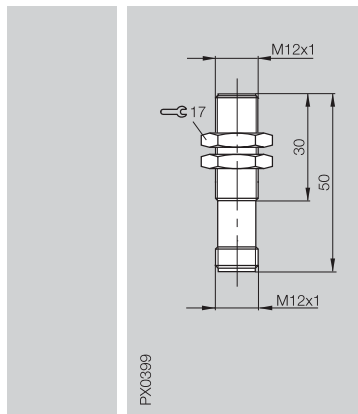

| BES 515-325-E5-T-S4                | BES 515-356-E5-T-S4                | BES 515-326-E5-T-S4                | BES 515-360-E5-T-S4                | BES 515-327-E5-T-S4                |
|------------------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|
| 10...30 V DC                       | 10...30 V DC                       | 10...30 V DC                       | 10...30 V DC                       | 10...30 V DC                       |
| ≤ 3.5 V                            | ≤ 3.5 V                            | ≤ 3.5 V                            | ≤ 3.5 V                            | ≤ 3.5 V                            |
| 75 V DC                            | 75 V DC                            | 75 V DC                            | 75 V DC                            | 75 V DC                            |
| 130 mA                             | 130 mA                             | 130 mA                             | 130 mA                             | 130 mA                             |
| ≤ 25 mA                            | ≤ 25 mA                            | ≤ 25 mA                            | ≤ 25 mA                            | ≤ 20 mA                            |
| yes                                | yes                                | yes                                | yes                                | yes                                |
| yes                                | yes                                | yes                                | yes                                | yes                                |
| ≤ 5 %                              | ≤ 5 %                              | ≤ 5 %                              | ≤ 5 %                              | ≤ 5 %                              |
| -40...+70 °C                       | -40...+70 °C                       | -40...+70 °C                       | -40...+70 °C                       | -40...+70 °C                       |
| -40...+85 °C                       | -40...+85 °C                       | -40...+85 °C                       | -40...+85 °C                       | -40...+85 °C                       |
| +105 °C                            | +105 °C                            | +105 °C                            | +105 °C                            | +105 °C                            |
| ≤ 800 Hz                           | 400 Hz                             | 500 Hz                             | 200 Hz                             | 200 Hz                             |
| DC 13                              | DC 13                              | DC 13                              | DC 13                              | DC 13                              |
| no                                 | no                                 | no                                 | no                                 | no                                 |
| IP 69K and<br>IP 68 per BWN Pr. 27 | IP 69K and<br>IP 68 per BWN Pr. 27 | IP 69K and<br>IP 68 per BWN Pr. 27 | IP 69K and<br>IP 68 per BWN Pr. 27 | IP 69K and<br>IP 68 per BWN Pr. 27 |
| <b>Stainless steel 1.4571</b>      | <b>Stainless steel 1.4571</b>      | <b>Stainless steel 1.4571</b>      | <b>Stainless steel 1.4571</b>      | <b>Stainless steel 1.4571</b>      |
| PEEK                               | PEEK                               | PA 12                              | PA 12                              | PA 12                              |
| Connector                          | Connector                          | Connector                          | Connector                          | Connector                          |
| cULus                              | cULus                              | cULus                              | cULus                              | cULus                              |
| BKS-S260-3                         | BKS-S260-3                         | BKS-S260-3                         | BKS-S260-3                         | BKS-S260-3                         |

**1.5**

Factor 1  
Weld immune  
Magnetic field immune  
Diagnostic  
Steelface  
Pressure rated  
Pressure rated Ex  
Namur Ex  
Temperature rated  
**PROXINOX®**  
Ring  
Sensors  
Extended switching distance

**5**

Connectors,  
Holders ...  
Page 5.2 ...





Ring sensors are used for feed control with screws, nails etc.

The output is static, i. e., it remains active as long as a metal part is located in the sensing range.

|                                         |  |
|-----------------------------------------|--|
| Housing size                            |  |
| Inside diameter $d_w$                   |  |
| Minimum object size steel taper (St 37) |  |



|                                    |    |   |  |
|------------------------------------|----|---|--|
| PNP                                | NO | ① |  |
| Supply voltage $U_B$               |    |   |  |
| Voltage drop $U_d$ at $I_e$        |    |   |  |
| Rated insulation voltage $U_i$     |    |   |  |
| Rated operational current $I_e$    |    |   |  |
| No-load supply current $I_0$ max.  |    |   |  |
| Output resistance $R_a$            |    |   |  |
| Polarity reversal protected        |    |   |  |
| Short circuit protected            |    |   |  |
| Ambient temperature range $T_a$    |    |   |  |
| Utilization category               |    |   |  |
| Function indicator                 |    |   |  |
| Degree of protection per IEC 60529 |    |   |  |
| Housing material                   |    |   |  |
| Material of sensing face           |    |   |  |
| Connection                         |    |   |  |
| Recommended connector              |    |   |  |
| Pulse extension                    |    |   |  |




① Wiring diagrams see page 1.0.6



# Ring Sensors

## Inductive Sensors

DC 3-wire  
Block style housings  
 $d_w \varnothing 10, \varnothing 25, \varnothing 45 \text{ mm}$
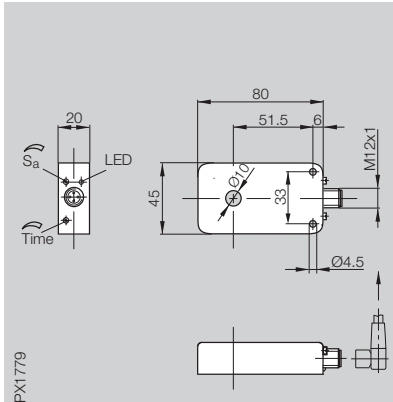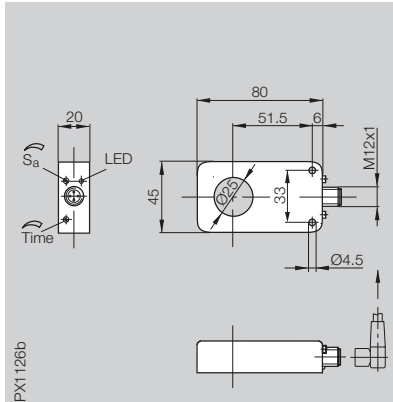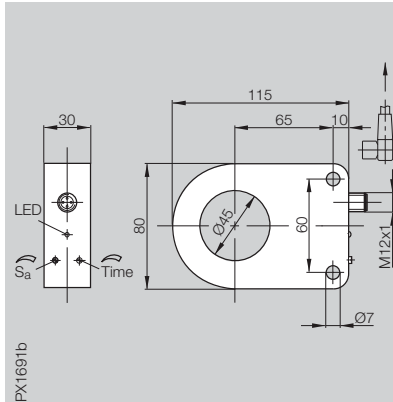
| 80×45×20 mm                                                                       | 80×45×20 mm                                                                       | 115×80×30 mm                                                                       |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| $\varnothing 10 \text{ mm}$<br>$\varnothing 2 \text{ mm}$                         | $\varnothing 25 \text{ mm}$<br>$\varnothing 4 \text{ mm}$                         | $\varnothing 45 \text{ mm}$<br>$\varnothing 9 \text{ mm}$                          |
|  |  |  |
| BES IKV-010.23-G-Z-S4                                                             | BES IKV-025.23-G-Z-S4                                                             | BES IKV-045.23-G-Z-S4                                                              |
| 10...30 V DC                                                                      | 10...30 V DC                                                                      | 10...30 V DC                                                                       |
| ≤ 2 V                                                                             | ≤ 2 V                                                                             | ≤ 2 V                                                                              |
| 75 V DC                                                                           | 75 V DC                                                                           | 75 V DC                                                                            |
| 200 mA                                                                            | 200 mA                                                                            | 200 mA                                                                             |
| ≤ 10 mA                                                                           | ≤ 10 mA                                                                           | ≤ 10 mA                                                                            |
| Open collector                                                                    | Open collector                                                                    | Open collector                                                                     |
| yes                                                                               | yes                                                                               | yes                                                                                |
| yes                                                                               | yes                                                                               | yes                                                                                |
| -25...+70 °C                                                                      | -25...+70 °C                                                                      | -25...+70 °C                                                                       |
| DC 13                                                                             | DC 13                                                                             | DC 13                                                                              |
| yes                                                                               | yes                                                                               | yes                                                                                |
| IP 65                                                                             | IP 65                                                                             | IP 65                                                                              |
| Plastic                                                                           | Plastic                                                                           | Plastic                                                                            |
| Plastic                                                                           | Plastic                                                                           | Plastic                                                                            |
| Connector                                                                         | Connector                                                                         | Connector                                                                          |
| BKS- 19/BKS- 20                                                                   | BKS- 19/BKS- 20                                                                   | BKS- 19/BKS- 20                                                                    |
| 2.5...250 ms adjustable                                                           | 2.5...250 ms adjustable                                                           | 2.5...250 ms adjustable                                                            |

**1.5**

Factor 1  
Weld immune  
Magnetic field immune  
Diagnostic  
Steelface  
Pressure rated  
Pressure rated Ex  
Nimur Ex  
Temperature rated  
PROXINOX®  
**Ring Sensors**  
Extended switching distance

**5**

Connectors ...  
page 5.2 ...




Ring sensor housing size  
80×45×20 mm  
also available as **analog**  
**distance sensor**.

## Inductive Sensors

DC 3-wire  
 $\varnothing 80 \times 67$  mm  
 $s_n$  50 mm

|                                         |                               |
|-----------------------------------------|-------------------------------|
| Housing size                            | $\varnothing 80 \times 67$ mm |
| Mounting (see notes starting p. 1.0.11) | non-flush                     |
| Rated operating distance $s_n$          | 50 mm                         |
| Assured operating distance $s_a$        | 0...40.5 mm                   |

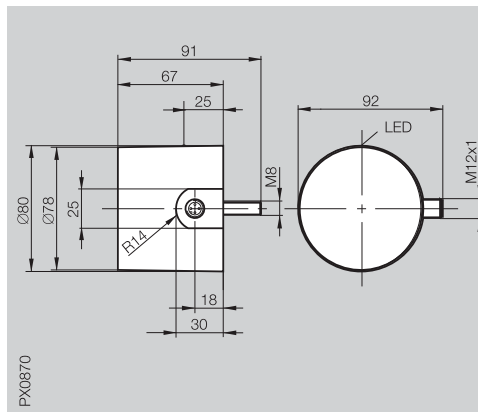

|     |                         |                          |
|-----|-------------------------|--------------------------|
| PNP | NO ①<br>complementary ③ | BES IKJ-S-050-P-2-S-S4-C |
|-----|-------------------------|--------------------------|

|                                   |                |
|-----------------------------------|----------------|
| Supply voltage $U_B$              | 10...55 V DC   |
| Voltage drop $U_d$ at $I_e$       | $\leq 2$ V     |
| Rated insulation voltage $U_i$    | 75 V DC        |
| Rated operational current $I_e$   | 200 mA         |
| No-load supply current $I_0$ max. | $\leq 10$ mA   |
| Output resistance $R_a$           | Open collector |
| Polarity reversal protected       | yes            |
| Short circuit protected           | yes            |

|                                 |              |
|---------------------------------|--------------|
| Repeat accuracy R               | $\leq 5$ %   |
| Ambient temperature range $T_a$ | -25...+70 °C |
| Switching frequency f           | 100 Hz       |
| Utilization category            | DC 13        |
| Function indicator              | yes          |

|                                    |       |
|------------------------------------|-------|
| Degree of protection per IEC 60529 | IP 67 |
|------------------------------------|-------|

|                          |           |
|--------------------------|-----------|
| Housing material         | Plastic   |
| Material of sensing face | Plastic   |
| Connection               | Connector |

|                       |                   |
|-----------------------|-------------------|
| Recommended connector | BKS-_ 19/BKS-_ 20 |
|-----------------------|-------------------|

① Wiring diagrams see page 1.0.6

### Application

These sensors are used when longer switching distances are required. The IKU style is especially preferred for non-contact sensing of conveyor belts, e.g. in monitoring the width of narrow conveyed material or checking dispensing lines.







# large housing extended switching distance

## Inductive Sensors

DC 3-/4-wire  
Block style housings  
s<sub>n</sub> 30 mm

|                                             |
|---------------------------------------------|
| <b>35×35×100 mm</b>                         |
| non-flush                                   |
| <b>30 mm (adjustable with teach-in key)</b> |
| 0...24.3 mm                                 |

|                           |
|---------------------------|
| <b>35×35×300 mm</b>       |
| non-flush                 |
| <b>30 mm (adjustable)</b> |
| 0...24.3 mm               |

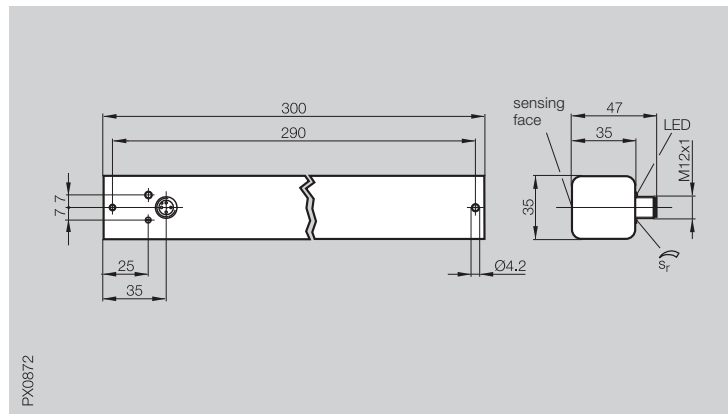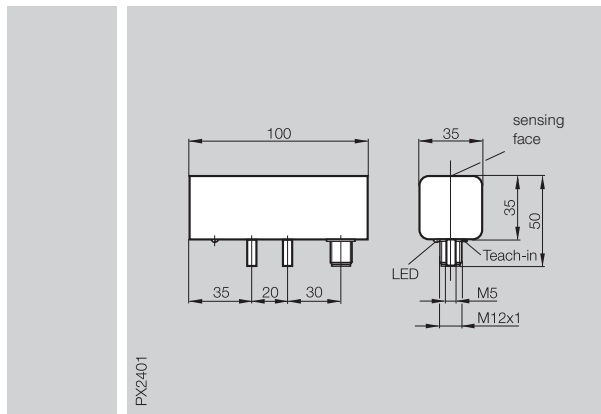

|                             |
|-----------------------------|
| <b>BES IKU-011T.28-G-S4</b> |
| 10...30 V DC                |
| ≤ 2 V                       |
| 75 V DC                     |
| 400 mA                      |
| ≤ 10 mA                     |
| Open collector              |
| yes                         |
| yes                         |
| ≤ 5 %                       |
| -25...+70 °C                |
| 50 Hz                       |
| DC 13                       |
| yes                         |
| IP 65                       |
| Plastic                     |
| Plastic                     |
| Connector                   |
| BKS_ 19/BKS_ 20             |

|                          |
|--------------------------|
| <b>BES IKU-031.28-S4</b> |
| 10...30 V DC             |
| ≤ 2 V                    |
| 75 V DC                  |
| 200 mA                   |
| ≤ 10 mA                  |
| Open collector           |
| yes                      |
| no                       |
| ≤ 5 %                    |
| -25...+70 °C             |
| 50 Hz                    |
| DC 13                    |
| yes                      |
| IP 65                    |
| Plastic                  |
| Plastic                  |
| Connector                |
| BKS_ 19/BKS_ 20          |

**1.5**

Factor 1  
Weld immune  
Magnetic field immune  
Diagnostic  
Steelface  
Pressure rated  
Pressure rated Ex  
Namur Ex  
Temperature rated  
PROXINOX®  
Ring Sensors  
**Extended switching distance**

**5**

Connectors ...  
page 5.2 ...

